




s.81

1/2" - 2" ISO 228, side drain

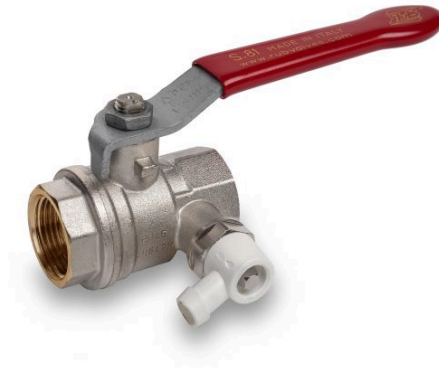

## Quality

- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

## Body

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications
- Double side drain allows easy and safe downstream line venting

## Stem

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

## Sealing

- Pure PTFE self-lubricating seats with flexible-lip design

## Threads

- ISO 228 parallel female by female threads
- G 1/4" ISO 228 drain on both side



## Flow

- Full port to DIN 3357 for maximum flow

## Handle

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

## Working pressure & temperature

- 16 bar (230 PSI) non-shock cold working pressure
- Pressure applicable to valve, not to side tap
- -20°C to +170°C (-4°F to +350°F)
- Temperature applicable to valve, not to side tap
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

## Options

- Stem extension
- T-handle
- Oval lockable handle
- Stainless steel handle (1.4016 / AISI 430)
- Patented locking device
- Compact drain
- Stubby handle
- **RuB** memory stop designed to be installed with our stubby handle

## Upon request

- Stainless steel ball (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design
- Male by female threads


## PED directive

- The product described in this document meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25mm

## Approved by or in compliance with


- EAC - Declaration of conformity (Russia, Kazakhstan, Belarus)
- RoHS Compliant (EU)
- GOST R (Russia)

**NOTE:** approvals apply to specific configurations/sizes only.

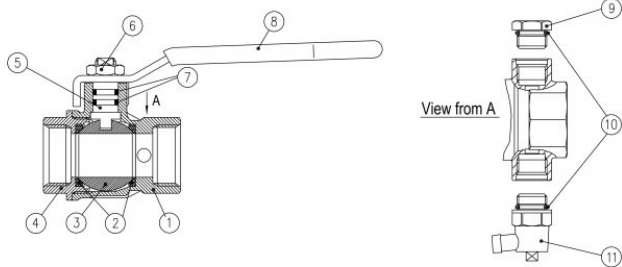

1.1/4\"/>


	PART DESCRIPTION	Q.TY	MATERIAL
1	Nickel plated body (external treatment)	1	CW617N
2	Seat	2	PTFE
3	Chrome plated ball	1	CW617N
4	Nickel plated end-cap (external treatment)	1	CW617N
5	Nickel plated stem O-ring design	1	CW617N
6	Geomet® nut	1	CB4FF (EN10263-2)
7	O-Ring	2	FPM
8	Red PVC coated Geomet® steel handle	1	DD11 (EN10111)
9	Nickel plated cap	1	CW617N
10	O-Ring	2	EPDM
11	Side tap	1	-

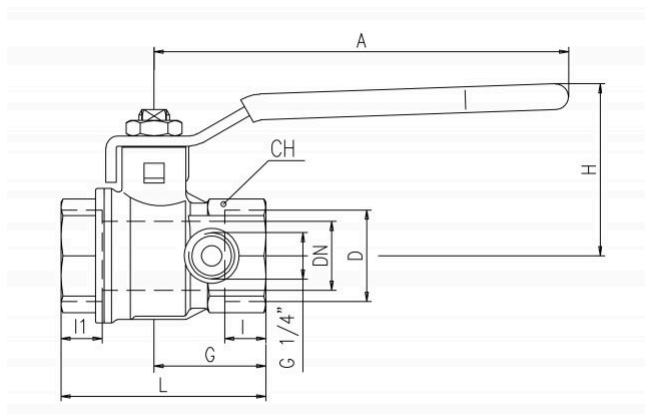


DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

Code	S81D00	S81E00	S81F00	S81G00	S81H00	S81I00
D (inch)	1/2	3/4	1	1.1/4	1.1/2	2
DN (mm)	15	20	25	32	40	50
I1 (mm)	11	12	21	23	17	26.5
I (mm)	11	12	14	15	17	19
L (mm)	56	59.5	79.5	90.5	95.5	118.5
G (mm)	31	32.5	39	44	50.5	58
A (mm)	100	120	120	158	158	158
H (mm)	43	50	54	73	79	86
CH (mm)	25	31	40	49	54	68.5
Kv (m <sup>3</sup> /h)	28	42	70	80	125	179

Pressure-temperature chart

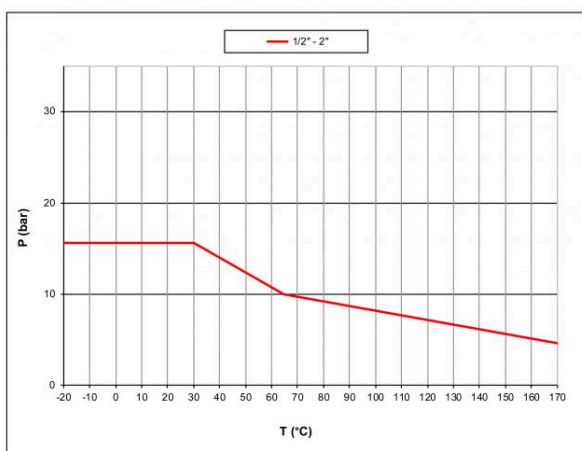

Pressure drop chart

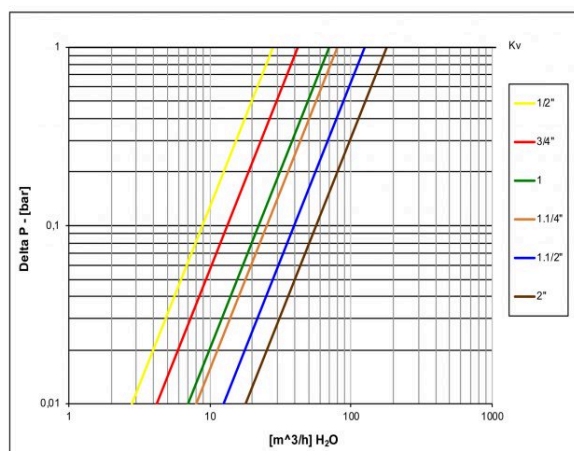

Ask for additional information on the whole range of **RUB** products and consult with your supplier for special applications.  
For complete disclaimer: [www.rubvalves.com/disclaimer](http://www.rubvalves.com/disclaimer)