



s.93 BSPT downstream exhaust

1/2" - 2" with patented locking handle



Featuring patented tamper-proof lockable handle that has no equal in the market.

RuB s.93 range exhausts automatically and continuously downstream air pressure as soon as turned in the closed position.

Valve is lockable in the closed position only, according to Part. 1910.147 safety OSHA (USA) requirements allowing safe maintenance of the air-supplied equipment; when valve is open, one simple 90° turn of the handle shuts flow immediately.

We care for those you care for.



Quality

- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

Body

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- The valve body includes a tapped downstream depressurization venting outlet to direct exhaust air or assemble mufflers for noise control
- Finest brass according to EN 12165 and EN 12164 specifications

Stem


- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

Sealing

- Molybdenum filled PTFE self-lubricating seats with flexible-lip design

Threads

- ISO 7/1, BS 21 BSPT taper female by female threads

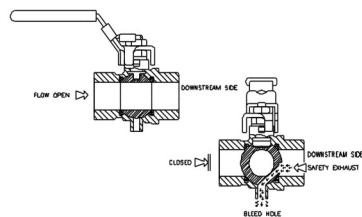

Flow

- Full port to DIN 3357 for maximum flow

Handle

- Geomet® carbon steel lockable handle patent n. 7074-B/90 with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service

Working pressure & temperature

- 14 bar (200 PSI) non-shock cold working pressure
- -10°C to +100°C (+15°F to +210°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

Options

- Stainless steel handle (1.4016 / AISI 430)
- Non-locking Geomet® carbon steel lever handle
- NPT taper ANSI B.1.20.1 threads
- EN 10226-1, ISO 228 parallel threads
- Safety pin
- Muffler, hose

Upon request

- Custom design
- Sizes 1/4" and 3/8"
- T-handle


PED directive

- The product described in this document meets the requirements of PED Directive 2014/68/EU and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25 mm


Approved by or in compliance with

- RoHS Compliant (EU)
- OSHA Compliant (United States)

NOTE: approvals apply to specific configurations/sizes only.

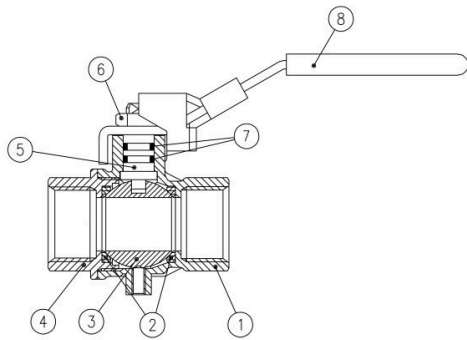


	PART DESCRIPTION	Q.TY	MATERIAL
1	Nickel plated body (external treatment)	1	CW617N
2	Seat	2	PTFE molybdenum filled
3	Chrome plated ball	1	CW617N
4	Nickel plated end-cap (external treatment)	1	CW617N
5	Nickel plated stem O-Ring design	1	CW617N
6	Geomet® nut	1	CB4FF (EN10263-2)
7	O-Ring	2	FPM
8	Light blue PVC coated Geomet® steel lockable handle	1	DD11 (EN10111)

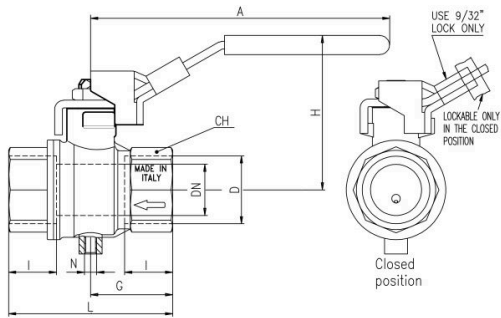


Code	S93D50	S93E50	S93F50	S93G50	S93H50	S93I50
D (inch)	1/2	3/4	1	1 1/4	1 1/2	2
DN (mm)	15	20	25	32	40	50
I (mm)	15.5	17	21	23	23	26.5
L (mm)	59	64	81	93	102	121
G (mm)	29.5	32	40.5	46.5	51	60.5
A (mm)	96	117	117	156.5	156.5	156.5
H (mm)	51	59	63	77	83	90
CH (mm)	25	31	40	49	54	68.5
N	M5			G 1/4"		
Kv (m ³ /h)	41.7	59.4	80	113	264	384

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

Pressure-temperature chart

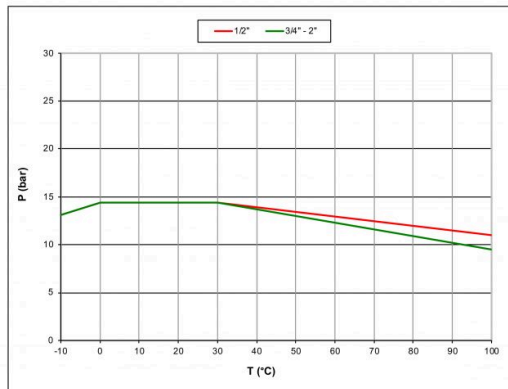

Pressure drop chart

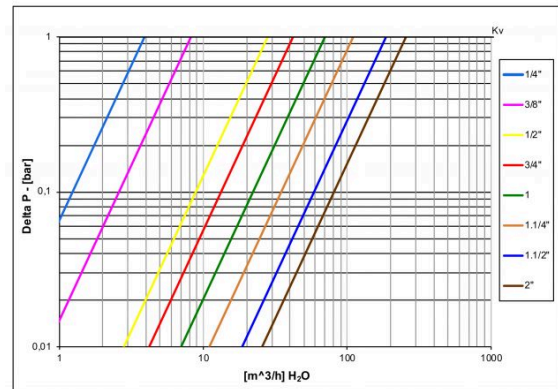

Ask for additional information on the whole range of **RUB** products and consult with your supplier for special applications.
For complete disclaimer: www.rubvalves.com/disclaimer