



s.34 NPT

1/8" - 1/2"
mini ball valve
suitable for panel mounting



Quality

- Each valve is seal tested for maximum safety
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life

Body

- One piece drawn sand blasted brass body incorporating stem neck which provides excellent guidance of the stem
- Finest brass according to EN 12164 specification

Stem

- Maintenance-free, double FPM O-rings at the stem for maximum safety

Sealing

- Pure PTFE self-lubricating seats with flexible-lip design

Threads

- NPT taper ANSI B.1.20.1 female by female threads

Handle

- Lever and T-handle clearly show ball position
- Nylon back lever or T-handle removable with valve in service

Working pressure & temperature

- 200 PSI non-shock cold working pressure
- -4°F to +200°F (-20°C to +90°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

Options


- Male by female threads
- Screw driver or wrench operated
- Yellow lever or T-handle
- ISO 228 parallel threads

Approved by or in compliance with


- GOST-R (Russia)
- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.



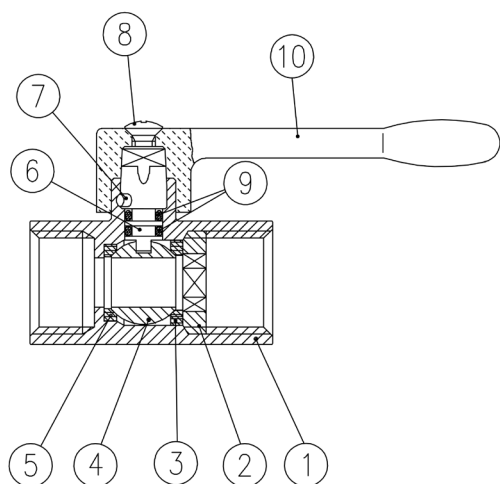


	Part description	Q.ty	Material
1	Chrome plated body	1	CW617N
2	Retainer nut	1	CW617N
3	Retainer seat	1	PTFE
4	Chrome plated ball	1	CW617N
5	Body seat	1	PTFE
6	Unplated stem	1	CW617N
7	Pin	1	1.4301 / AISI304
8	Zinc plated screw	1	CB4FF (EN10263-2)
9	O-Ring	2	FPM
10	Black handle	1	Nylon glass filled 30%

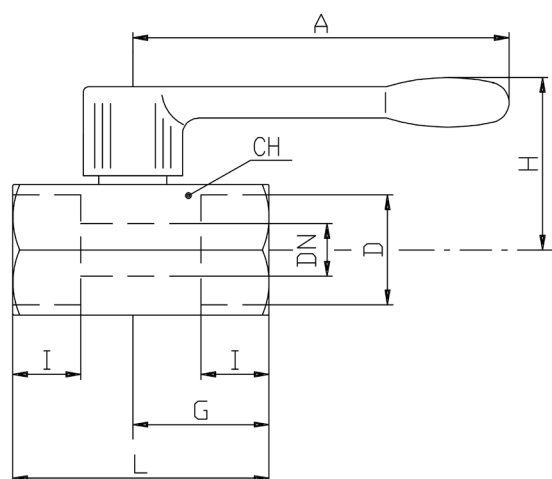


DN shows the nominal flow diameter.

Code	S34AX0	S34BX0	S34CX0	S34DX0
D (inch)	1/8	1/4	3/8	1/2
DN (inch)	0.236	0.314	0.314	0.393
I (inch)	0.354	0.472	0.472	0.610
L (inch)	1.712	1.712	1.712	2.106
G (inch)	0.905	0.905	0.905	1.102
A (inch)	2.834	2.834	2.834	2.834
H (inch)	1.200	1.200	1.200	1.279
CH (inch)	0.826	0.826	0.826	0.984
Cv (GPM)	2.0	4.9	4.2	5.8

Pressure-temperature chart

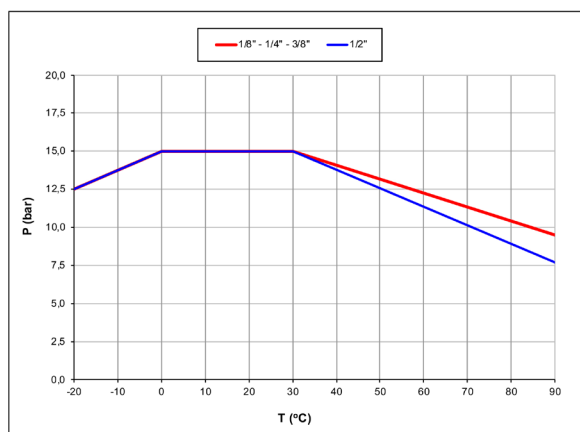

Pressure drop chart

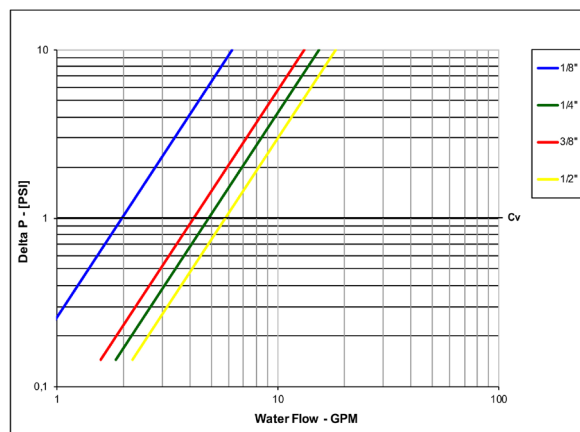

XCES34N - 4818