



s.140 bib-cock

1/2" - 3/4" with plain outlet



Quality

- Chrome plated brass ball for longer life
- Plain outlet

Body

- Hot forged sand blasted nickel plated brass body
- Angle pattern ball bib-cock
- Copper alloy brass according to EN 12165 and EN 12164 specifications

Stem

- Blowout-proof brass stem
- Maintenance-free, double O-rings (FPM and NBR) at the stem for maximum safety

Sealing

- Pure PTFE seats

Threads

- UNI ISO 228 male inlet thread

Handle

- Enameled red steel handle
- **WARNING:** do not exceed reasonable temperature and/or electrical load
- Handle removable with valve in service

Working pressure & temperature

- 15 bar non-shock cold working pressure
- -20°C to +80°C (-4°F to +175°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

Options

- Configuration from 3/8" up to 1" with hose (s.142)

PED directive


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

Approved by or in compliance with


- GOST-R (Russia)
- EAC - Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.



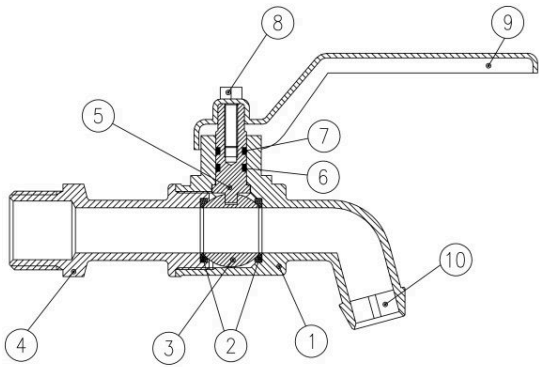

| | PART DESCRIPTION | Q.TY | MATERIAL |
|----|-----------------------|------|----------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW614N |
| 4 | Nickel plated end-cap | 1 | CW617N |
| 5 | Stem O-Ring design | 1 | CW617N |
| 6 | O-Ring | 1 | FPM |
| 7 | O-Ring | 1 | NBR |
| 8 | Screw | 1 | Steel |
| 9 | Enameled red handle | 1 | Steel |
| 10 | Infuser | 1 | Vestolen |

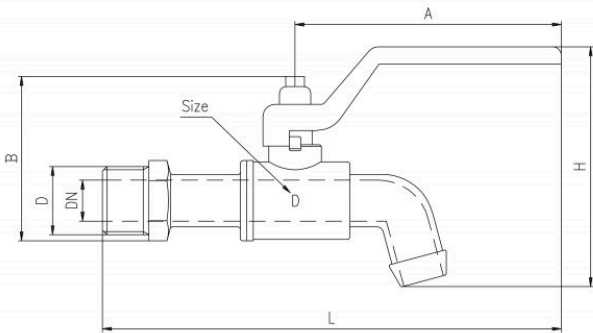

| Code | 140D00 | 140E00 |
|----------|--------|--------|
| D (inch) | 1/2 | 3/4 |
| DN(mm) | 10 | 12 |
| B (mm) | 49 | 54 |
| L (mm) | 129 | 131.5 |
| A (mm) | 80 | 80 |
| H (mm) | 60 | 65.5 |

Ask for additional information on the whole range of **RUB** products and consult with your supplier for special applications.
For complete disclaimer: www.rubvalves.com/disclaimer

XCE140 - 4266