



s.142 bib-cock

3/8" - 1" with 3/4" outlet and hose



Quality

- Chrome plated brass ball for longer life

Body

- Hot forged sand blasted nickel plated brass body
- Angle pattern ball bib-cock with hose fitting
- Copper alloy brass according to EN 12165 and EN 12164 specifications

Stem

- Maintenance free, double two O-rings (FPM and NBR) at the stem for maximum safety

Sealing

- Pure PTFE seats

Threads

- UNI ISO 228 male inlet thread
- 3/4" threaded outlet complete with hose



Handle

- Enameled red steel handle
- **WARNING:** do not exceed reasonable temperature and/or electrical load
- Handle removable with valve in service

Working pressure & temperature

- 15 bar up to 3/4", 12 bar 1" non-shock cold working pressure
- -20°C to +80°C
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

Options

- Configuration 1/2" or 3/4" with plain outlet (s.140)


PED directive

- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking


Approved by or in compliance with

- GOST-R (Russia)

NOTE: approvals apply to specific configurations/sizes only.

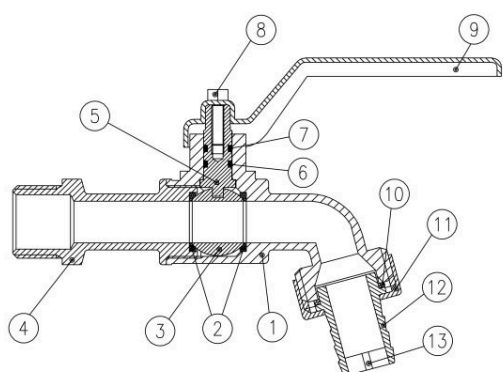

	PART DESCRIPTION	Q.TY	MATERIAL
1	Nickel plated body	1	CW617N
2	Seat	2	PTFE
3	Chrome plated ball	1	CW614N
4	Nickel plated end-cap	1	CW617N
5	Stem O-Ring design	1	CW614N
6	O-Ring	1	FPM
7	O-Ring	1	NBR
8	Zinc plated screw	1	CB4 (EN10263-2)
9	Enameled red handle	1	DC04 (EN10130)
10	Washer	1	PVC rubber
11	Nickel plated nut	1	CW617N
12	Nickel plated hose	1	CW617N
13	Infuser	1	Vestolen

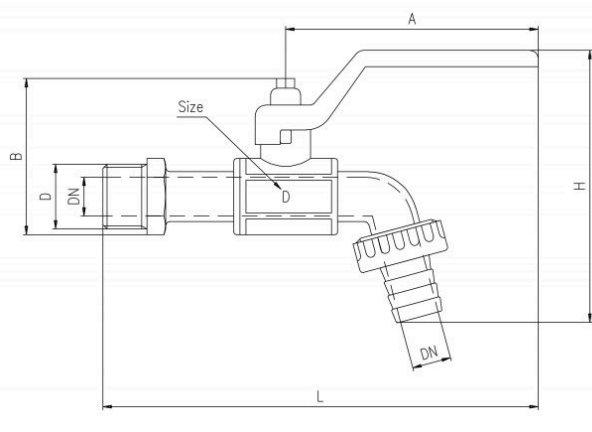

Code	142C0P	142D0P	142E0P	142F0P
D (inch)	3/8	1/2	3/4	1
DN(mm)	10	12	12	15
B (mm)	53	53	61	65
L (mm)	135	137	148.5	158
A (mm)	80	80	88.5	88.5
H (mm)	93	93	108.5	126