



s.110

3/8" - 4" ISO 228 gate valve



Quality

- Suitable for domestic and agricultural installations

Threads

- ISO 228 parallel female by female threads

Body

- Hot forged sand blasted brass body
- Low pressure drop

Stem

- High performance EPDM stem seal

Handle

- Red coated steel hand-wheel
- Zinc plated steel top nut
- **WARNING:** do not exceed reasonable temperature and/or electrical load

Working pressure & temperature

- 10 bar non-shock cold working pressure
- -10°C to +80°C (+15°F to +175°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve


PED directive

- The product described in this document meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25mm


Approved by or in compliance with

- GOST-R (Russia)

NOTE: approvals apply to specific configurations/sizes only.

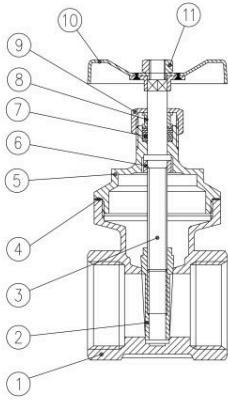

	PART DESCRIPTION	Q.TY	MATERIAL
1	Body	1	CW617N
2	Gate	1	CB 754S
3	Stem	1	CW614N
4	Body cap sealing	1	Guarnital Fibre
5	Cap	1	CW617N
6	Stem ring	1	CW614N
7	Packing gland seal	1	EPDM90
8	Packing gland	1	CW614N
9	Packing gland nut	1	CW614N
10	Red round handle	1	Steel
11	Handle nut	1	Steel

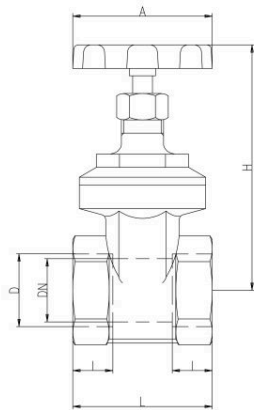

Code	110C00	110D00	110E00	110F00	110G00	110H00	110I00	110L00	110M00	110N00
D (inch)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
DN (mm)	13	13.5	15.5	19	27	33	44	47	60	72
I (mm)	8	9	9	10	10	11	12	13	13	15
L (mm)	33	35	39	43	48	54	58	63	70	80
A (mm)	45	45	45	50	55	60	70	80	100	100
H (mm)	67	68	68	80	86	107	134	143	175	202