



s.128A

3/4" Y - strainer



Quality

- Suitable for gas, industrial, pneumatic and hydraulic installations

Threads


- ISO 228/1 female by female parallel threads and inspection plug

Body


- Hot forged sand blasted, nickel plated brass body
- Stainless steel filter (1.4301 / AISI 304)
- Degree of filtration: 50µm

Working pressure & temperature

- 6 bar non-shock cold working pressure
- -40°C to +60°C (-40°F to +140°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

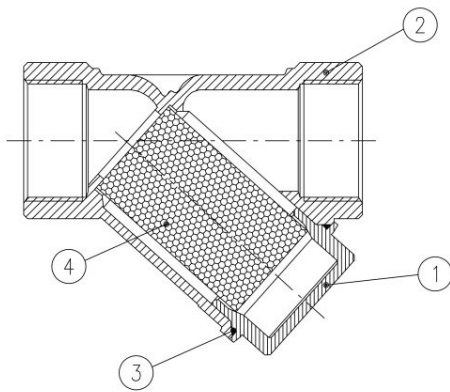

	PART DESCRIPTION	Q.TY	MATERIAL
1	Nickel plated end-cap	1	CW617N
2	Nickel plated body	1	CW617N
3	O-ring	1	NBR
4	Stainless steel strainer 50µm	1	1.4301/AISI 304

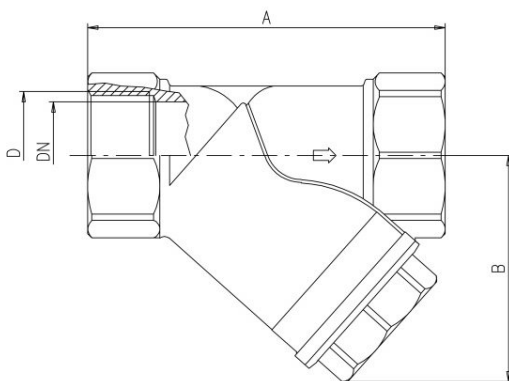

D (inch)	3/4
A (mm)	70
B (mm)	48
DN	20