




s.128A

**Female/Female
3/4" Y-strainer**

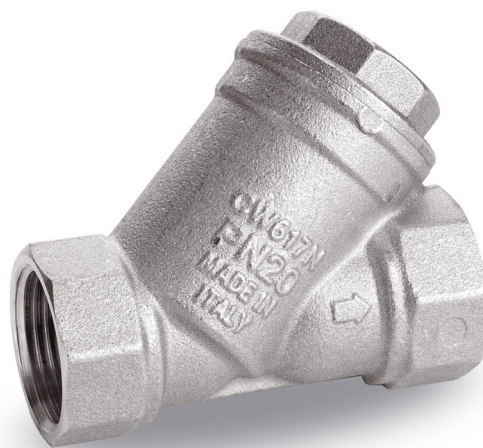

QUALITY

- Suitable for gas, industrial, pneumatic and hydraulic installations

BODY

- Hot forged sand blasted, nickel plated brass body
- Stainless steel (1.4301 / AISI 304) filter
- Degree of filtration: 50µm

THREADS

- ISO 228/1 female by female parallel threads and inspection plug

WORKING PRESSURE & TEMPERATURE

- 6 bar non-shock cold working pressure
- -40°C to +60°C (-40°F to +140°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

s.128A XCE128A - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



Part description		Q.ty	Material
1	Nickel plated end-cap	1	CW617N
2	Nickel plated body	1	CW617N
3	O-ring	1	NBR
4	Stainless steel strainer 50µm	1	1.4301 / AISI 304

D (inch)	3/4"
A (mm)	70
B (mm)	48
DN	20

