



s.128

Female/Female
1/4" - 4"
ISO 228, Y-strainer



QUALITY

- Suitable for industrial, pneumatic and hydraulic installations

BODY

- Hot forged CW617N brass body
- Stainless steel (1.4301 / AISI 304) filter
- Degree of filtration: 1/4" through 2" 500 µm, 2 1/2", 3", 4" 800 µm

THREADS

- ISO 228/1 female by female parallel threads and inspection plug

WORKING PRESSURE & TEMPERATURE

- 20 bar up to 2", 16 bar over 2" non-shock cold working pressure
- -20°C to +110°C (-4°F to +230°F) in absence of steam
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

PED DIRECTIVE

- The product described in this document meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25 mm; it cannot be used with non-dangerous gases in sizes larger than 50mm

APPROVED BY OR IN COMPLIANCE WITH

- Attestation de Conformité Sanitaire (France)



NOTE: approvals apply to specific configurations/sizes only.

s.128 XCE128 - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




	Part description	Q.ty	Material
1	End-cap	1	CW617N
2	Body	1	CW617N
3	O-Ring	1	NBR
4	Stainless steel strainer	1	1.4301 / AISI 304

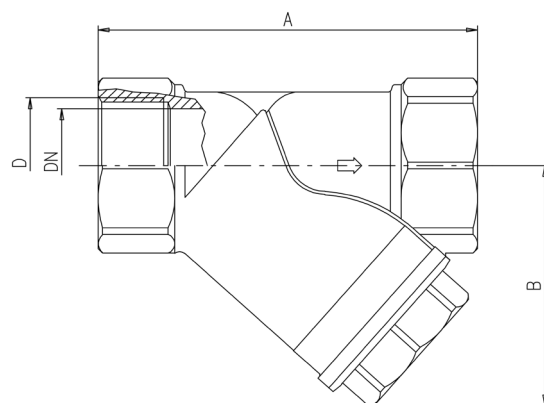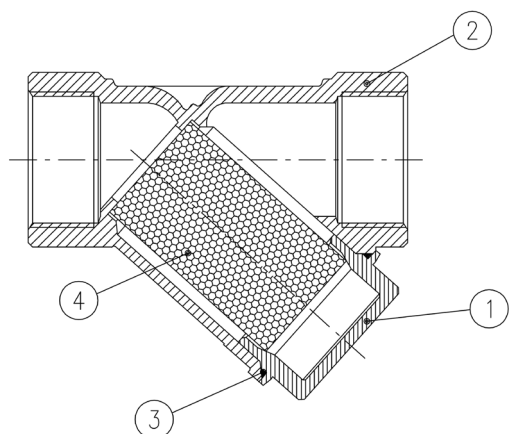

Code	128B00	128C00	128D00	128E00	128F00	128G00	128H00	128I00	128L00	128M00	128N00
D (inch)	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A (mm)	55	55	58	70	87	96	106	126	150	169	219
B (mm)	40	40	40	48	56	64	73	88,5	105	120	162
DN	8	10	15	20	25	32	40	50	65	80	100
PN (Kg/cm ²)	20	20	20	20	20	20	20	20	16	16	16
Kv (m ³ /h)	2.2	3.4	3.8	7.2	11	13	15	28	77	93	146

PRESSURE-TEMPERATURE CHART

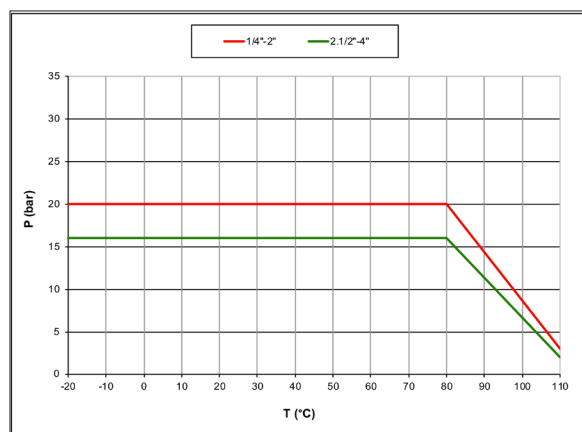

PRESSURE DROP CHART

