




# S.140 bib-cock

1/2" - 3/4"  
with plain outlet

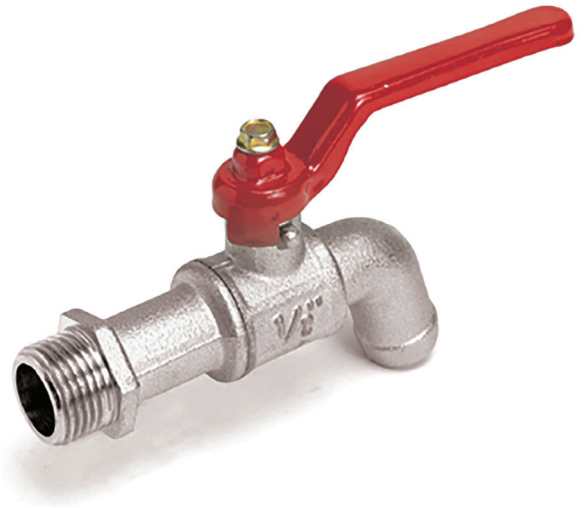

EAC

## QUALITY

- Chrome plated brass ball for longer life
- Plain outlet

## BODY

- Hot forged sand blasted nickel plated brass body
- Angle pattern ball bib-cock
- Copper alloy brass according to EN 12165 and EN 12164 specifications

## STEM

- Blowout-proof brass stem
- Maintenance-free, double O-rings (FPM and NBR) at the stem for maximum safety

## SEALING

- Pure PTFE seats

## THREADS

- UNI ISO 228 male inlet thread

## HANDLE

- Enameled red steel handle
- **WARNING:** do not exceed reasonable temperature and/or electrical load
- Handle removable with valve in service

## WORKING PRESSURE & TEMPERATURE

- 15 bar non-shock cold working pressure
- -20°C to +80°C (-4°F to +175°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

## PED DIRECTIVE

- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

## APPROVED BY OR IN COMPLIANCE WITH

- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

**NOTE:** approvals apply to specific configurations/sizes only.


## s.140 XCE140 - 5813

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



PLUMBING

	Part description	Q.ty	Material
1	Nickel plated body	1	CW617N
2	Seat	2	PTFE
3	Chrome plated ball	1	CW614N
4	Nickel plated end-cap	1	CW617N
5	Stem O-Ring design	1	CW617N
6	O-Ring	1	FPM
7	O-Ring	1	NBR
8	Screw	1	Steel
9	Enameled red handle	1	Steel
10	Infuser	1	Vestolen

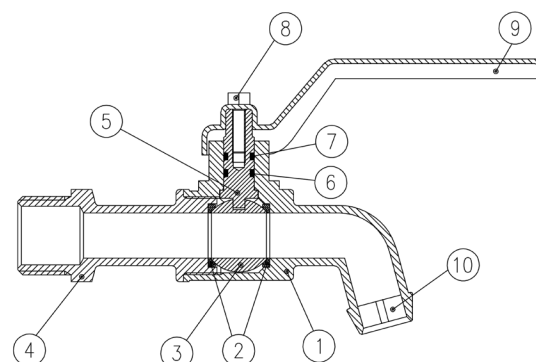

Code	142C0P	142D0P
D (inch)	1/2"	3/4"
DN (mm)	10	12
B (mm)	49	54
L (mm)	129	131.5
A (mm)	80	80
H (mm)	60	65.5

