



INDUSTRY CATALOG



**Started in 1954 by a young Silvio Bonomi, Bonomi Industries Srl
led product and process innovations of the brass valve industry
for over 70 years**

**Our founder's motto was “Quality and trust”. This is the legacy
we bring forward every day.**



About us

Bonomi Industries Srl is an Italian manufacturer of high quality shut-off brass valves, actuators and custom-engineered solutions. Under the RuB brand, its products are globally trusted for their reliability and performance in a variety of applications.

Bonomi Industries Srl is part of Hadron group — a private holding company established in 2018 during the strategic reorganization of Rubinetterie Utensilerie Bonomi (RuB), which also led to the creation of Shedstone, a real estate company — Bonomi Industries Srl continues to grow and innovate. Started in 1954, with entrepreneurial roots tracing back to 1828, the company upholds the values and tradition of a family business while embracing a vision focused towards the future.

Growth at Bonomi Industries Srl is driven by continuous investments in product improvements, advanced machining, assembly, and logistics technologies, as well as expanded manufacturing capabilities, enhanced system interconnectivity, database analysis and strengthened engineering and R&D efforts. At the same time, sustainability — encompassing environmental, social, and governance topics — has always been part of the company's DNA and inspires meaningful actions.

For Bonomi Industries Srl, innovation and responsibility go hand in hand. This commitment shapes a journey aimed at safeguarding the environment, empowering people, and fostering resilient governance for a better tomorrow.



Bonomi Industries Srl turns words into actions for all stakeholders
Scan the QR code to discover our values



Companies

RuB valves and actuators are trusted worldwide, installed across five continents and proven in the most demanding applications.

Production takes place entirely at our headquarters, Bonomi Industries Srl, in Mazzano (Brescia), Italy. Finished products are then distributed globally from Italy and through our international branches. In North America, *RuB, Incorporated* operates from a modern 5.000 sqm (50,000 sqf) facility, handling both assembly and distribution. In Japan, *RuB kk* serves as a strategic presence in a peculiar market.

With a strong global presence, we provide proximity, reliability, and outstanding service to our customers. Our sales team builds lasting partnerships with distributors and OEMs by offering responsive support and technical expertise. Certified, high-quality products, combined with deep knowledge of local cultures and regulations, make Bonomi Industries Srl the trusted partner in fluid control solutions.



Bonomi Industries srl


MAZZANO, BS - ITALY
Manufacturing



RuB, Inc.
SHAKOPEE, MN - USA
Distribution



RuB KK
TOKYO - JAPAN
Distribution

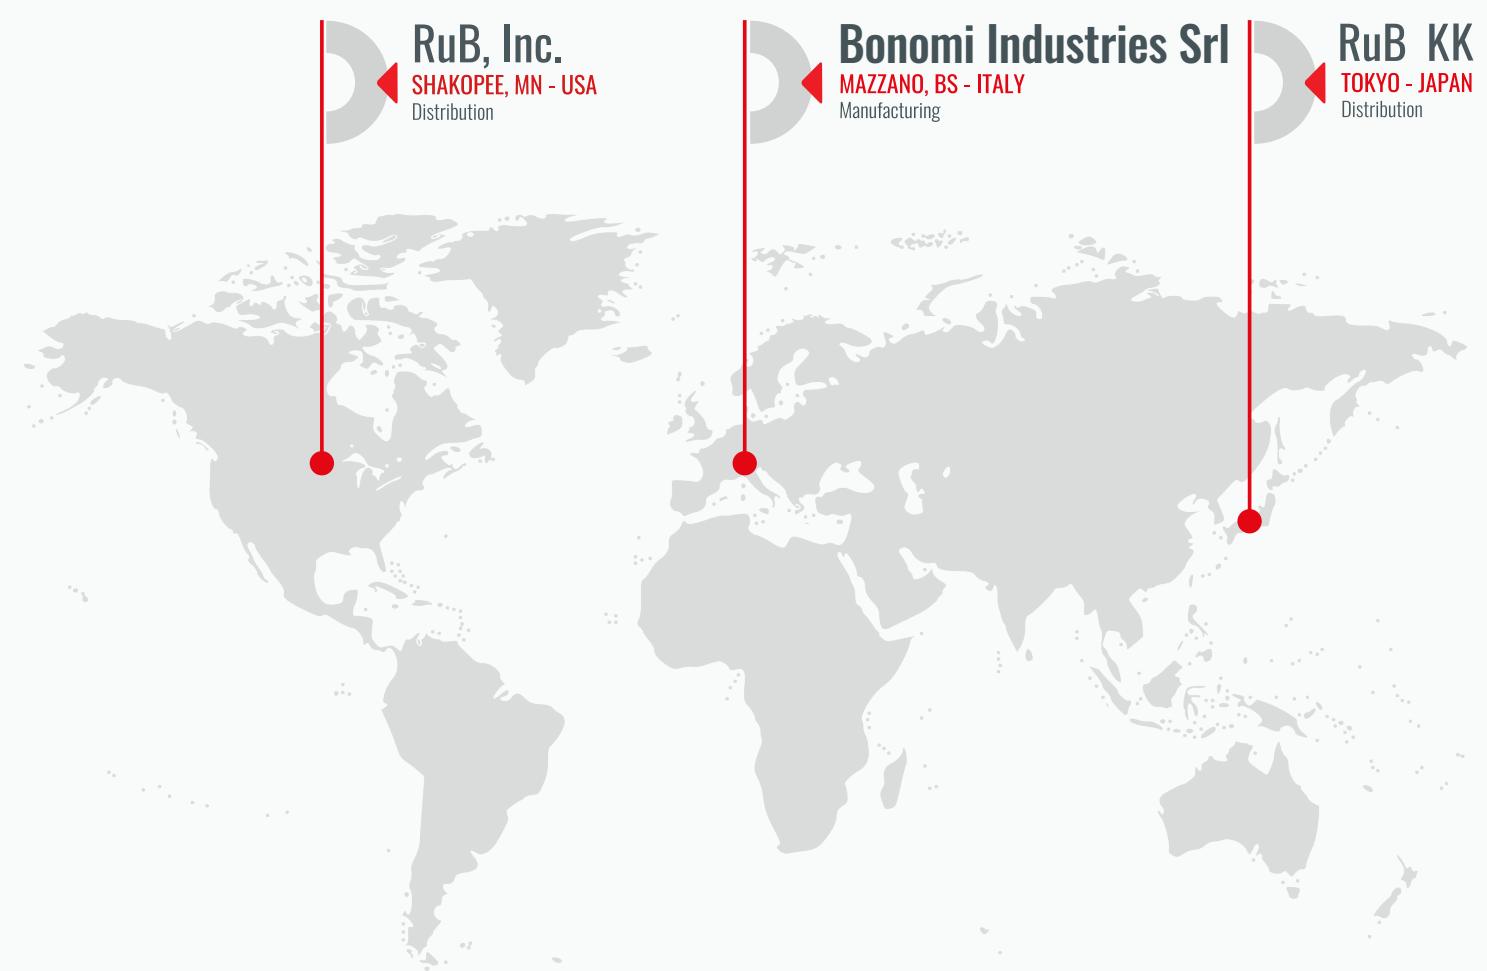

Quality

Quality you can trust, proven through generations of experience.

From rigorous incoming goods inspections to double leak testing, 24-72 hour valve assessments, and visual inspections for top markets/applications, Bonomi Industries Srl ensures consistent reliability and precision in every product. Advanced traceability systems, calibrated instruments, and statistical software enhance quality control throughout the production process.

Our dedicated Quality Control team supports continuous monitoring and improvement, ensuring that each production batch meets exactly applicable standards. Paired with robust testing protocols and expert technical support, we deliver solutions designed to meet the most challenging applications.



Approved by Lloyd's Register Quality Assurance:

ISO 9001:2015 (Quality Management) since 1998.

ISO 14001:2018 (Environmental Management System) since 2021.

ISO 45001:2018 (Occupational Health & Safety) since 2021.



Environment: Air and water are filtered and recovered. Use of recycled environment-friendly packaging materials. Scrap is recycled.



Product Quality Assessment: recognized by certifying bodies in all major industrialized countries worldwide



Safety: compliance with the provisions of decree 81/2008 for the safety system, extensive staff training, and continuous monitoring



Customized products developed by the Engineering Center




In compliance with the **PED Directive** since 2002



Quality you can trust

See our quality process in action/Experience every step of our quality process

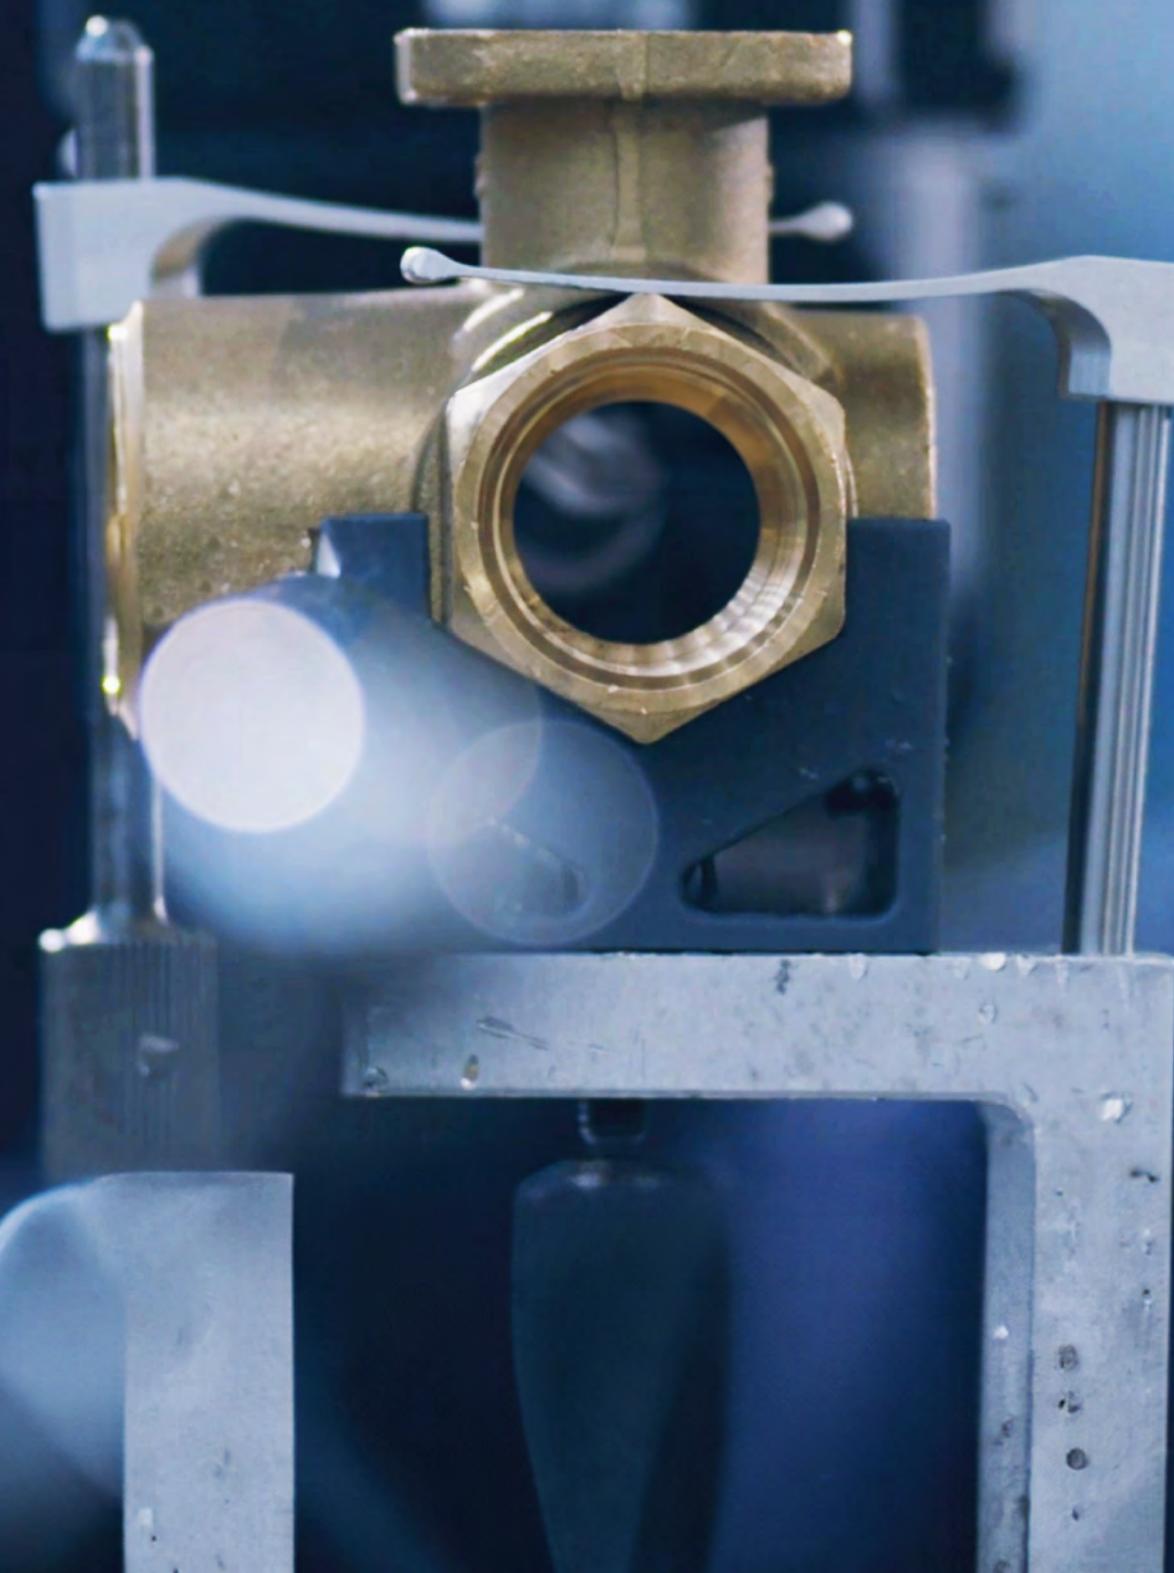

Sustainability

Sustainability has always been a necessity, not a choice. The adoption of sustainable practices at corporate level lays the foundation for creating virtuous cycles that inspire future generations.

Our commitment is stronger than ever, and we're proud to share with you here below figures that mark the tasks we focus on our actions, achievements, and the vision we have for the future. Localized production of electricity is now a reality and we have not been shy with our investments towards clean renewable energy.

Companies are finally waking up to producing their own electricity. Aside from covering the needs of our production manufacturing facility with through solar panels, we constantly reduce energy consumption by investing in smart technology and minimizing heavy material handling.

The diligence with which we strive to make our process and products less impactful on the environment is confirmed by the certifications awarded by international bodies, in particular ISO 14001:2018 and the "silver" medal in the EcoVadis sustainability assessment.

HOW WE WALK THE TALK.

100% of our brass ball valves prevent unnecessary waste – lifetime guaranteed

96% manufacturing scrap is reused

30% of energy comes from our own renewable sources

100% cooling waters are recovered and reused



Together, safeguarding our Planet
Learn more about our initiatives.





OEM

Every year, OEMs all over the world rely on RuB custom solutions to reduce leaks, equipment breakages and production downtime. We're heavily invested in OEM customizations with custom-made machinery for innovative products and solutions.

We have proven expertise in solving technical and operational challenges for leading boilers, heat pumps and burners manufacturers, LPG gas tank and system manufacturers, manufacturers of watering systems, fire protection, refrigeration, HVAC manufacturers, marine applications with shipbuilders, compressors, tanks, machine tools manufacturers, filtration, chemical, food processing and pharmaceutical companies.

We are intrigued to learn about your obstacles and bring your custom, top shelf solution to life.

PRIVATE LABEL

We strive to meet the needs of our customers in every way possible. And we do so not only through specifically designed, engineered and manufactured OEM products, but also by customizing standard RuB ball valves.


The possible branding options to choose from include:


- Changing the lever marking to the customer's trademark
- Packing with a custom label
- Customized handle colors and materials
- Customized valve fittings
- Dedicated valve body stamping
- Special marking on the valve body
- Custom installation instructions



OEM solutions, custom made for you

OEMs have a Partner to solve their challenges and develop new products

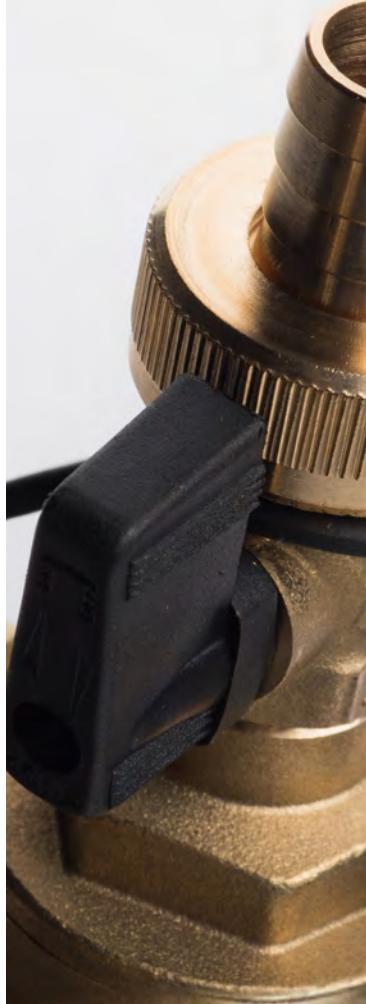

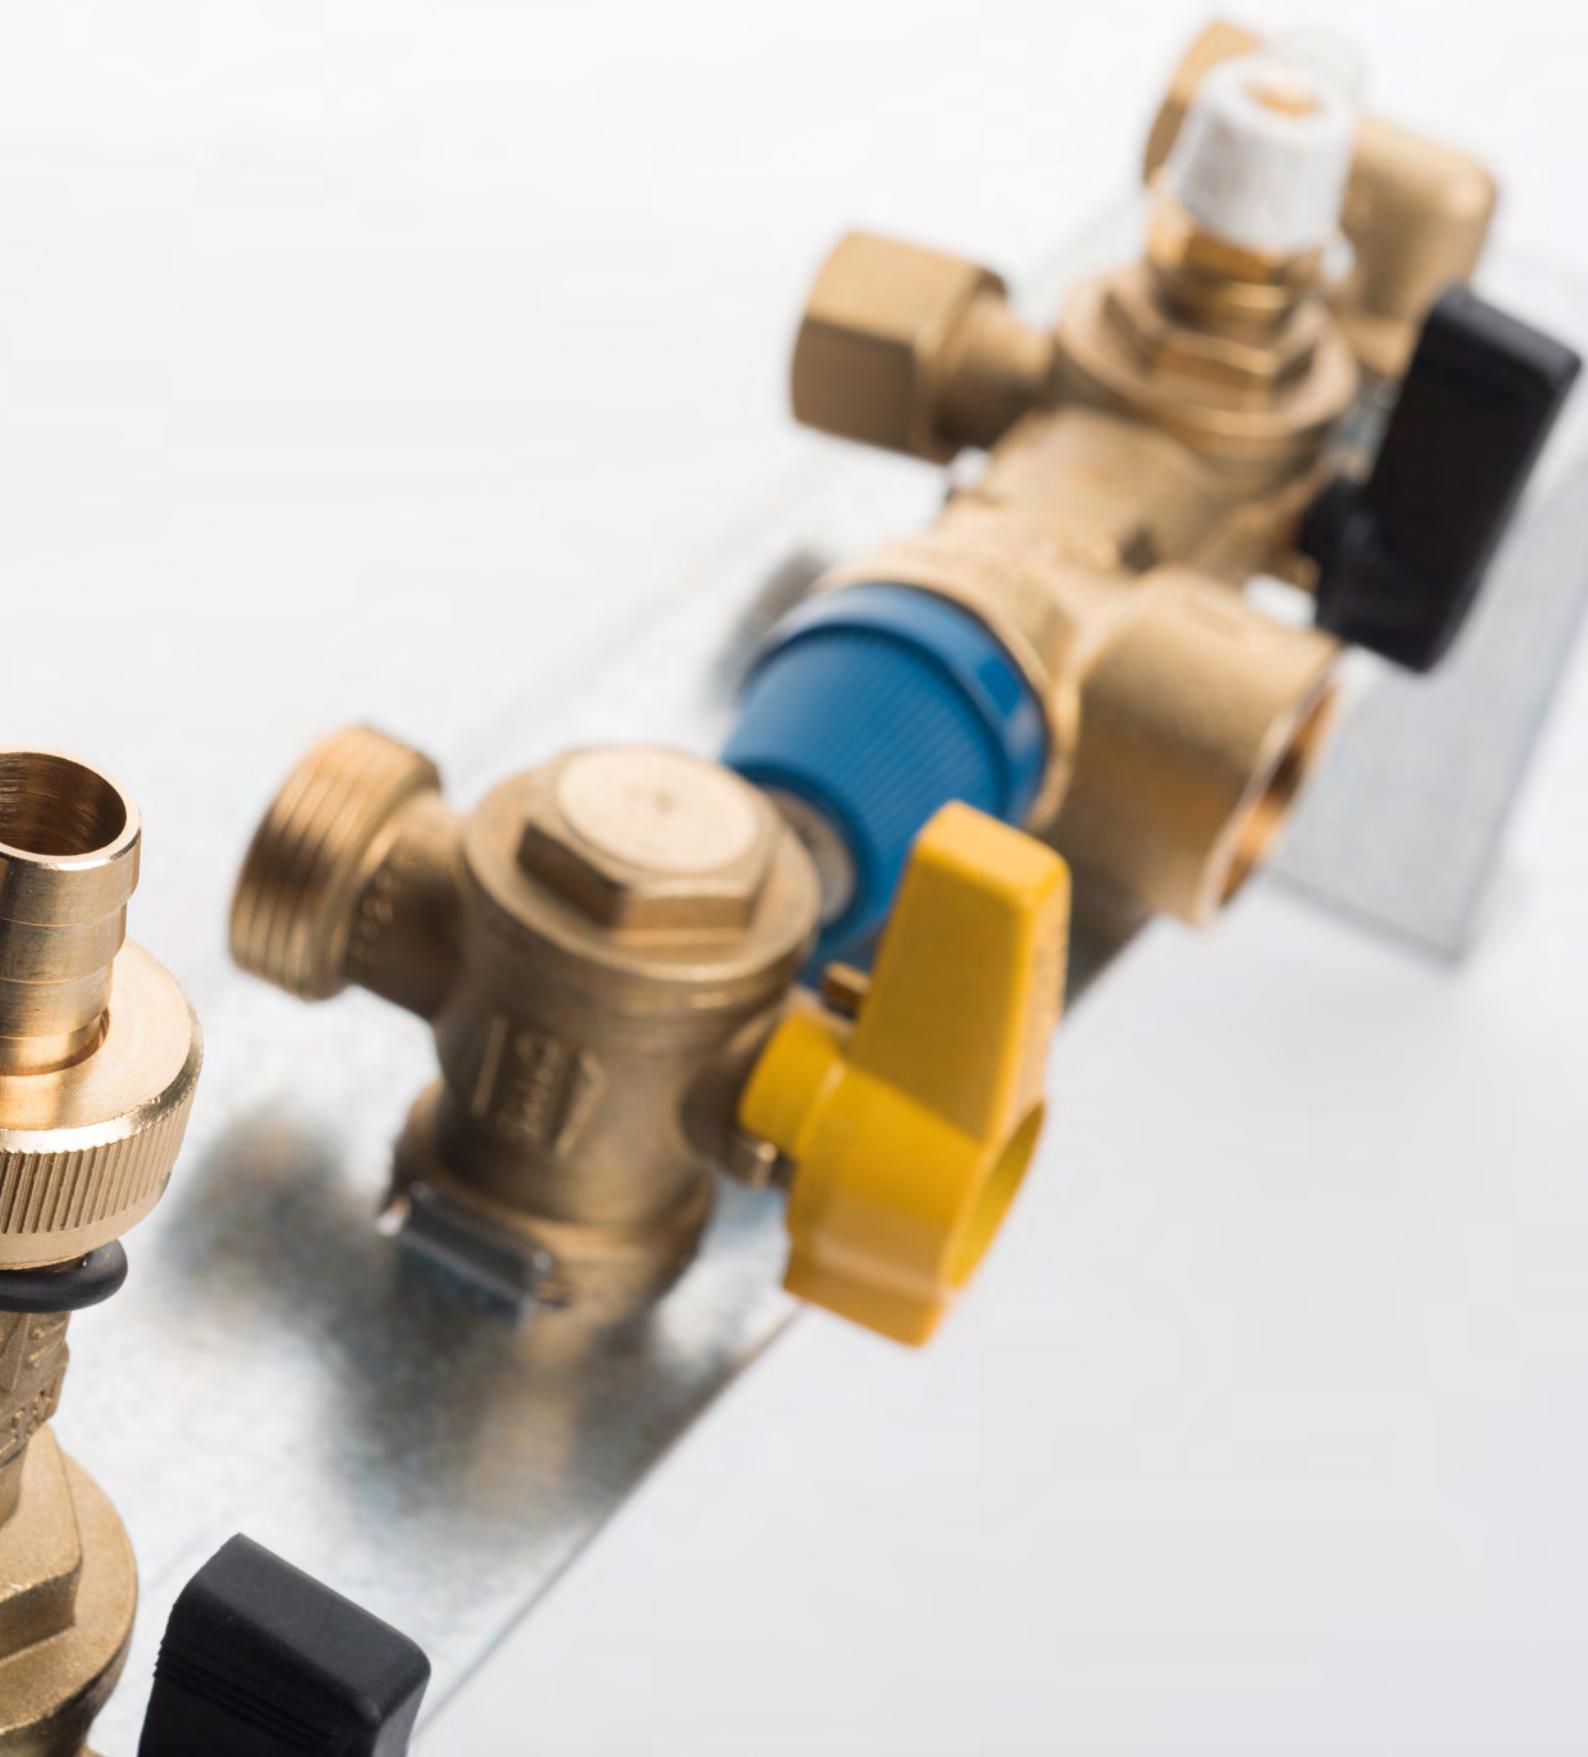

Certifications

We are proud to offer 100% made-in-Italy shut-off brass valves, actuators, and OEM-engineered products, all manufactured in our ISO 9001:2015 certified headquarters in Brescia, Italy. Since adopting this quality management system in 1992 under Lloyd's Register, we have continuously improved product reliability, performance and traceability.

Our certifications, granted by leading global laboratories and agencies, demonstrate compliance with the highest standards for major applications and markets. Supported by rigorous testing and state of art technology, our products meet the demanding requirements of top manufacturers and distributors worldwide.

PRODUCT TYPE APPROVALS

| | | | |
|---|---|--|---|
|  Deutsche Vereinigung des Gas und Wasserfaches e.V. Technisch-wissenschaftlicher Verein |  |  General Directorate of Civil Defence |  |
|  Deutsche Vereinigung des Gas und Wasserfaches |  |  The Australian Gas Association |  |
|  Deutsche Vereinigung des Gas und Wasserfaches Hygiene |  |  OSHA Compliant |  |
|  Schweizerischer Verein des Gas und Wasserfaches |  |  Factory Mutual Research Corporation |  |
|  Attestation de Conformité Sanitaire |  |  Underwriter Laboratories Inc. |  |
|  ARGB-KVBG |  |  CRN-TSSA |  |
|  Water Regulations Advisory Scheme |  |  CSA International for Drinking Water to NSF/ANSI 61-NSF/ANSI 372 |  |
|  British Standards Institution |  |  CSA - Canadian Standards Association |  |
|  Kiwa KUKreg4 |  |  KSFD -Kuwait Fire Service Directorate |  |
|  Ri.se. / Boverket |  |  LIA - L.P Gas Instruments Inspections Association |  |

COMPLIANCES

| | |
|---|---|
|  ROHS |  |
|  Reach declaration |  |

| | |
|--|---|
|  PED 2014/68/UE by ICM (0425) |  |
|  Декларация соответствия |  |




We developed and constantly innovate strict protocols and processes
Discover all the certifications and awards received from international bodies

OPEN
↑
SHUT

PATENTED
NO.1421306

RuB valve features

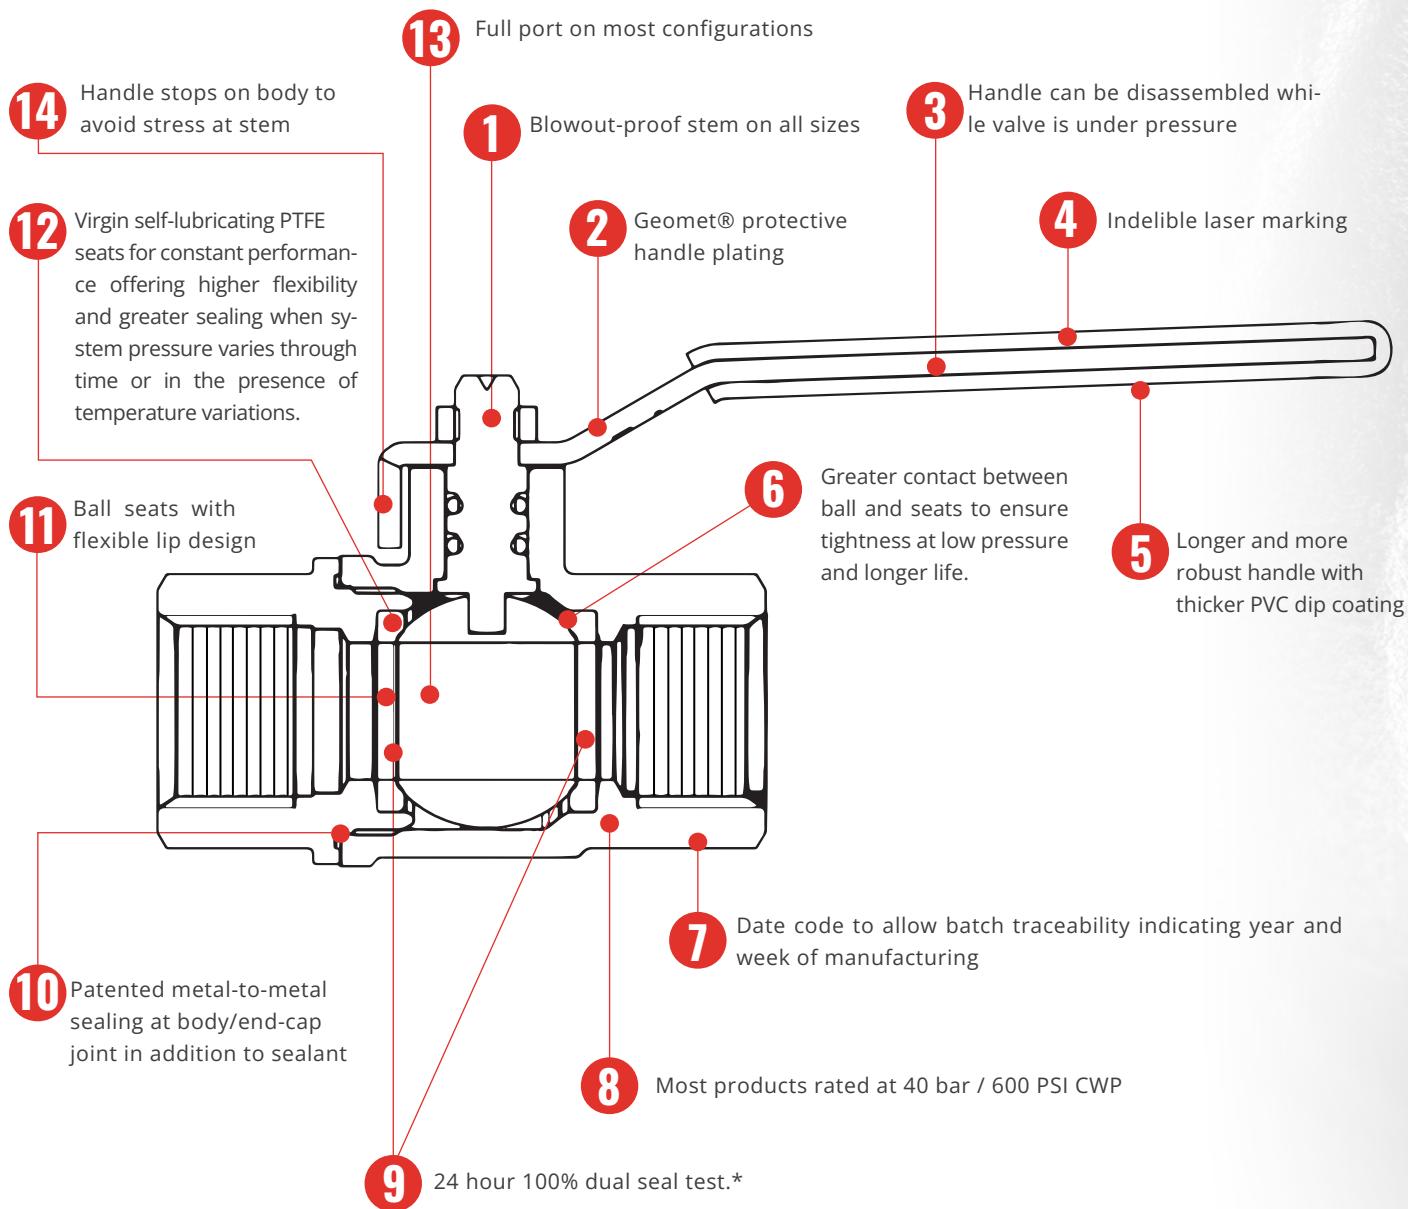

RuB seal test

Valve in half open position is pressurized at 6 bar (87 psig), then closed, trapping compressed air in between ball seats and stem sealing. After adequate preset time, based upon valve size, any leaks are verified using extremely accurate electronic sensors and any defective valve is automatically rejected; all valves passing this initial seal test are filled with compressed air again and remain closed and under pressure for minimum 24 hours; after 24 hours, the valves go back again under the same accurate a new set of electronic pressure sensors and any leaking valve is automatically rejected.

* Certain products are not suitable for double seal test



Our solutions come with an added benefit: maximizing your revenue
Scan the QR code to discover our products



INDUSTRY

From automotive and food processing to chemical, pharmaceutical, and power generation sectors, RuB valves are designed to meet the toughest operational demands. Our thorough 24-72 hour double-testing process ensures consistent performance, minimizing downtime and protecting your systems. Choose RuB for solutions that keep your operations running smoothly and efficiently, even in the most challenging environments.





INDUSTRY
Scan the QR code to discover our products



| | |
|---|---------|
| s.17 motor-oil drain ball valve | Page 20 |
| s.33 1/4" - 2" EN 10226-1, heavy duty packing gland | Page 22 |
| s.33 M/F 1/4" - 2" EN 10226-1, heavy duty packing gland | Page 24 |
| k.60 spring return 1/4" - 2", heavy duty - DIN 16722 M3, EN 10226-1 | Page 26 |
| s.7200L 3-way, lever, 4 seats 1/2" - 1" | Page 28 |
| s.7241L 3-way, lever, 4 seats 1/2" - 1" | Page 30 |
| s.7300L 3-way, lever, 4 seats, T-port 1/2" - 2" EN 10226-1 | Page 32 |
| s.7341L NPT 3-way, lever, 4 seats, T-port 1/2" - 2" | Page 36 |
| s.7350L BSPT 3-way, lever, 4 seats, T-port 1/2" - 2" | Page 40 |
| s.7600L 3-way, lever, 2 seats, L-port (diverting) 1/2" - 2" EN 10226-1 | Page 44 |
| s.7641L NPT 3-way, lever, 2 seats, L-port (diverting) 1/2" - 2" | Page 46 |
| s.7650L BSPT 3-way, lever, 2 seats, L-port (diverting) 1/2" - 2" | Page 48 |
| s.84 EN331 spring return 1/4" - 2" EN 10226-1 | Page 50 |
| s.85 1/4" - 2" EN 10226-1, packing gland | Page 52 |
| s.92 barrel drain 3/4" - 1" | Page 54 |
| s.92S NPT solid ball 1/4" - 4" | Page 56 |
| s.92 NPT SS trim 1/4" - 2" | Page 58 |
| s.95 NPT spring return 1/4" - 2" | Page 60 |
| s.100 3-way 4 seats T-port 1/4" - 2" ISO 228 | Page 62 |
| s.101 3-way 4 seats L-port 1/4" - 2" ISO 228 | Page 64 |
| s.172 motor-oil compact drain ball valve | Page 66 |
| SNI7352 1/4" NPT needle valve | Page 68 |
| Instrumentation package | Page 70 |



s.17 motor-oil drain ball valve

Specifically responding to a need in the automotive application, s.17 is fitted under the oil sump to ease drainage operations, and furthermore granting a most reliable tightness thanks to its special automatic locking device, even under severe conditions of vibration stress.

Frozen drain plug and stripped threads are eliminated, no more contact with hot oil, no messy hands or cloths and reduced oil changing time.



PATENTED



QUALITY

- 24h 100% seal test guaranteed
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Dual sealing system to prevent leakage
- Handle stops on body to avoid stresses at stem

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Compact design and solid structure
- Fines brass according to EN 12165 and EN 12164 to prevent corrosion

STEM

- Blowout-proof unplated brass stem
- Maintenance-free, double FPM O-ring at the stem for maximum safety

SEALING

- Glass filled pure PTFE self-lubricating seats with flexible-lip design

THREADS

- M24x1.5 – 3/8" threads

HANDLE

- Tamper proof and sealed to prevent dirt or dust from entering the rotation mechanism
- 90° opening rotation
- Automatic lock in closed position, to prevent accidental opening and thus warrant utmost safety

OPTIONS

- M16x1.5 threads – hose connection
- M12x1.5 threads – hose connection
- M24x1.5 – 1/4" threads



WORKING PRESSURE & TEMPERATURE

- 20 bar (300 PSI) non-shock cold working pressure
- -20°C to +130°C (-4°F to +266°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST


- Stainless steel ball (1.4401 / AISI 316)
- Custom design

PED DIRECTIVE

- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

APPROVED BY OR IN COMPLIANCE WITH


- GOST-R (Russia)
- RoHS Compliant (EU)
- **NOTE:** approvals apply to specific configurations/sizes only.

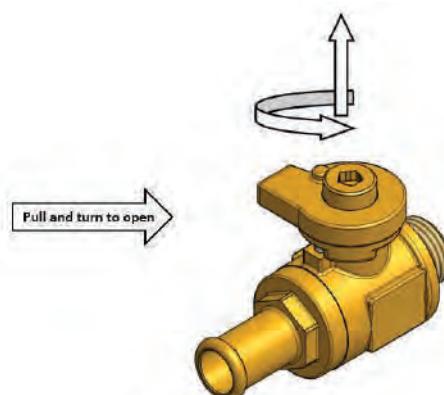


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




| Part description | | Q.ty | Material |
|------------------|---|------|-------------------------|
| 1 | Unplated sand blasted body | 1 | CW617N |
| 2 | Seat | 2 | PTFE glass filled 5-15% |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Unplated end-cap - hose connection - custom | 1 | CW617N |
| 5 | Unplated stem O-ring design | 1 | CW617N |
| 6 | Unplated sand blasted handle | 1 | CW617N |
| 7 | Unplated handle cap | 1 | CW617N |
| 8 | Spring | 1 | X10CrNi 18-8 |
| 9 | Spring pin Ø 3x8 ISO 8752 | 2 | X10CrNi 18-8 |
| 10 | O-Ring | 1 | FPM |

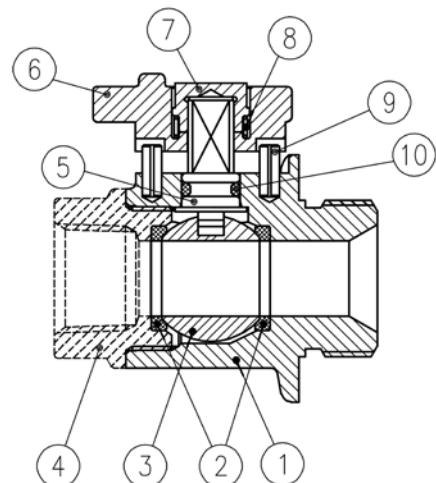


| D (mm) | M12X1.5 | M16X1.5 | M24X1.5 |
|------------------|---------|---------|---------|
| DN (mm) | 6 | 10 | 11.5 |
| I (mm) | 10 | 10 | 12 |
| B (mm) | 27 | 27 | 38 |
| G (mm) | 24.5 | 24.5 | 25.5 |
| A (mm) | 31.5 | 31.5 | 31.5 |
| H (mm) | 18 | 18 | 18 |
| A/F (mm) | 25 | 25 | 27 |
| Kv (m³/h) | | 8.8 | |

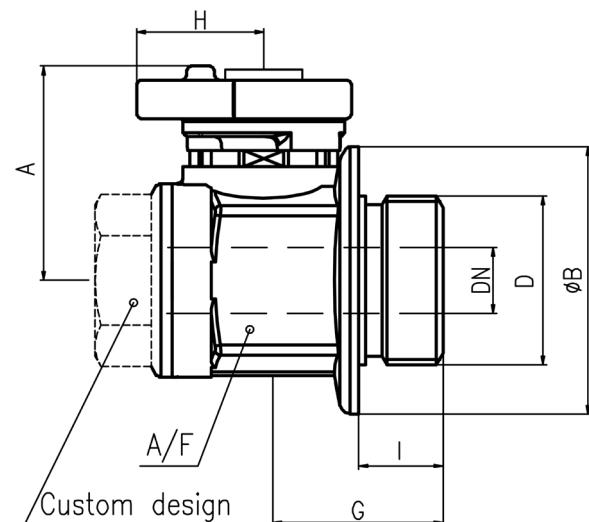

PRESSURE-TEMPERATURE CHART

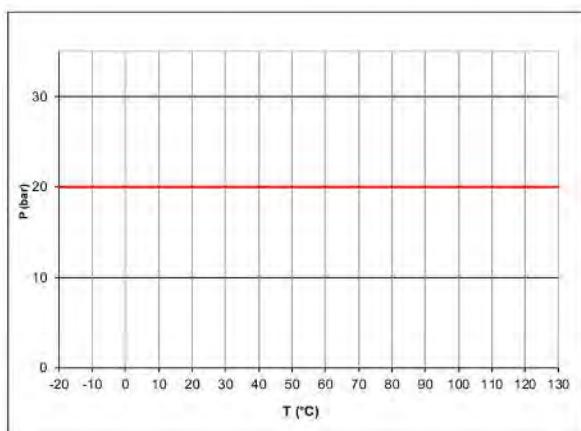

PRESSURE DROP CHART

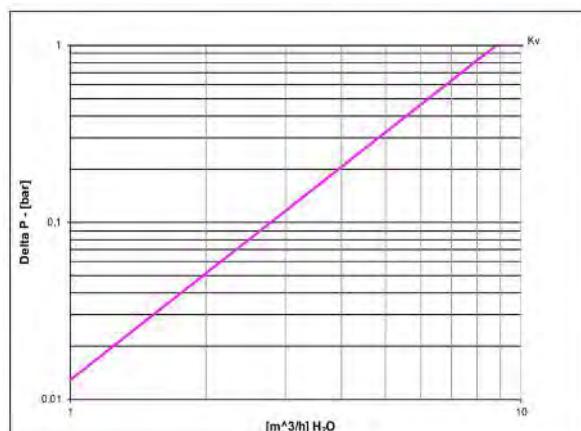



S.33

Female/Female
1/4" - 2"
EN 10226-1, heavy duty, packing gland



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stresses at stem

BODY

- Hot forged sand blasted, nickel plated brass body and cap sealed with Loctite® or equivalent threads sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- 100 % full port for maximum flow

OPTIONS

- Oval lockable handle ①
- Patented locking device ②
- Stainless steel handle (1.4016 / AISI 430) ③
- T-handle ④

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 65 bar (940 PSI) up to 1", 40 bar (600 PSI) over 1" non-shock cold working pressure
- -40°C to +170°C (-40°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball and/or stem (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design

PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25mm

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.




s.33 XCES33 - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|------------------------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated end-cap | 1 | CW617N |
| 5 | Nickel plated stem packing gland design | 1 | CW617N |
| 6 | Nickel plated gland nut | 1 | CW617N |
| 7 | Geomet® nut | 1 | CB4FF (EN10263-2) |
| 8 | Packing gland seal | 1 | PTFE |
| 9 | Washer | 1 | PTFE carbon filled 25% |
| 10 | Black PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

1 1/4"-2" hollow ball

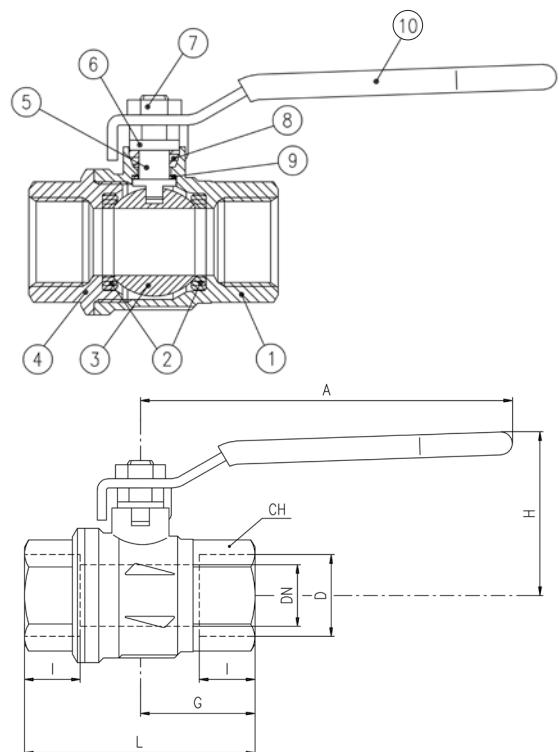


| Code | S33B00 | S33C00 | S33D00 | S33E00 | S33F00 | S33G00 | S33H00 | S33I00 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| I (mm) | 14 | 14 | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 51 | 51 | 61 | 74.5 | 90.5 | 104 | 117 | 135 |
| G (mm) | 25.5 | 25.5 | 30.5 | 37 | 45.5 | 52 | 59 | 67.5 |
| A (mm) | 82 | 82 | 100 | 120 | 120 | 158 | 158 | 158 |
| H (mm) | 39.5 | 39.5 | 43 | 52.5 | 56.5 | 78 | 85 | 91.5 |
| CH (mm) | 22 | 22 | 27 | 32 | 41 | 50 | 55 | 70 |
| PN (Bar) | 65 | 65 | 65 | 65 | 65 | 40 | 40 | 40 |
| Kv (m³/h) | 4.1 | 8.7 | 28 | 60 | 100 | 95 | 179 | 233 |


Ball valves are marked CE on handle from 1 1/4" to 2" as follow:

CE XXCODEXX Cat I-A

PRESSURE-TEMPERATURE CHART

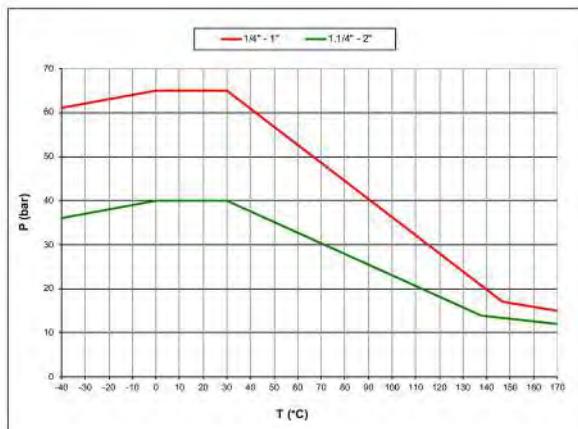

PRESSURE DROP CHART

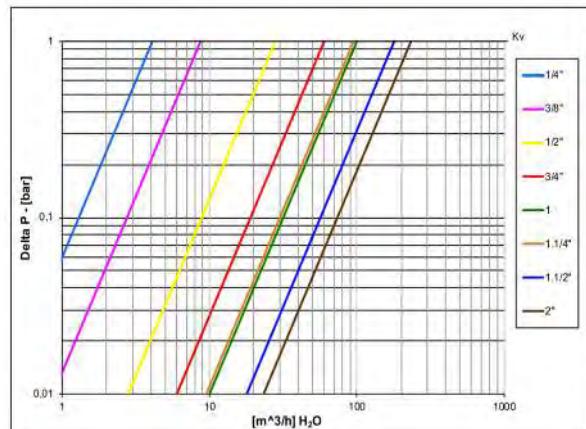



s.33 M/F

Male/Female
1/4" - 2"
EN 10226-1, heavy duty, packing gland



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stresses at stem

BODY

- Hot forged sand blasted, nickel plated brass body and cap sealed with Loctite® or equivalent threads sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- EN 10226-1, ISO 228 parallel female thread by EN 10226-1 taper male thread

FLOW

- 100 % full port for maximum flow

OPTIONS

- Oval lockable handle ①
- Patented locking device ②
- Stainless steel handle (1.4016 / AISI 430) ③
- T-handle ④

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 65 bar (940 PSI) up to 1", 40 bar (600 PSI) over 1" non-shock cold working pressure
- -40°C to +170°C (-40°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball and/or stem (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design


PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25mm

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.

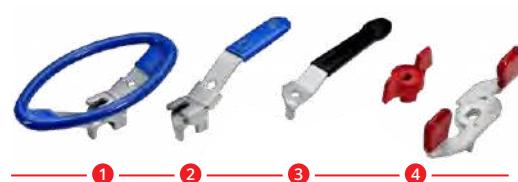


s.33 M/F XCE3321 - 0

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|------------------------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated male end-cap | 1 | CW617N |
| 5 | Nickel plated stem packing gland design | 1 | CW617N |
| 6 | Nickel plated gland nut | 1 | CW617N |
| 7 | Geomet® nut | 1 | CB4FF (EN10263-2) |
| 8 | Packing gland seal | 1 | PTFE |
| 9 | Washer | 1 | PTFE carbon filled 25% |
| 10 | Black PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

1 1/4"-2" hollow ball

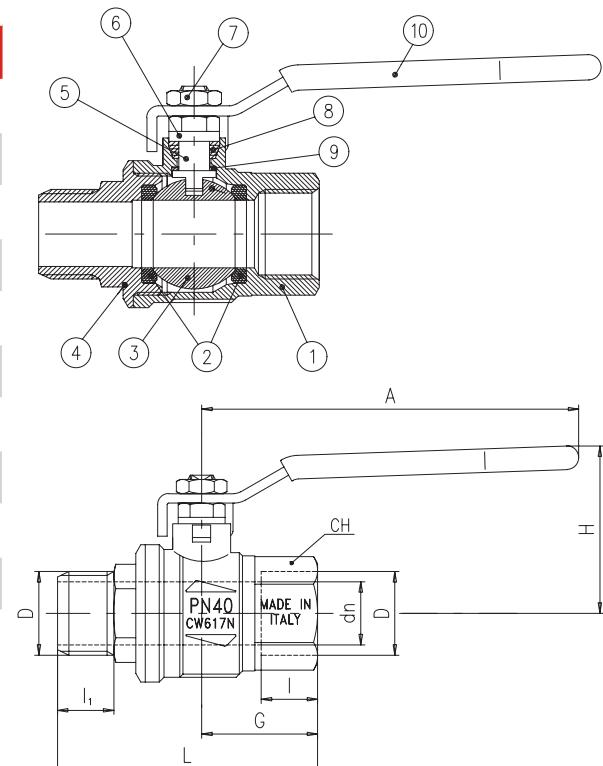


| Code | S33B20 | S33C20 | S33D20 | S33E20 | S33F20 | S33G20 | S33H20 | S33I20 |
|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| I (mm) | 14 | 14 | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| I1 (mm) | 13 | 13 | 16.5 | 18 | 22 | 24 | 24 | 27.5 |
| L (mm) | 62 | 62 | 72 | 83 | 99.5 | 112.5 | 127 | 143.5 |
| G (mm) | 25.5 | 25.5 | 30.5 | 37 | 45.5 | 52 | 59 | 67.5 |
| A (mm) | 82 | 82 | 100 | 120 | 120 | 158 | 158 | 158 |
| H (mm) | 39.5 | 39.5 | 43 | 52.5 | 56.5 | 78 | 85 | 91.5 |
| CH (mm) | 22 | 22 | 27 | 32 | 41 | 50 | 55 | 70 |
| PN (Bar) | 65 | 65 | 65 | 65 | 65 | 40 | 40 | 40 |
| Kv (m³/h) | 4.1 | 8.7 | 28 | 60 | 100 | 95 | 179 | 233 |


Ball valves are marked CE on handle from 1 1/4" to 2" as follow:

CE XXCODEXX Cat I-A

PRESSURE-TEMPERATURE CHART

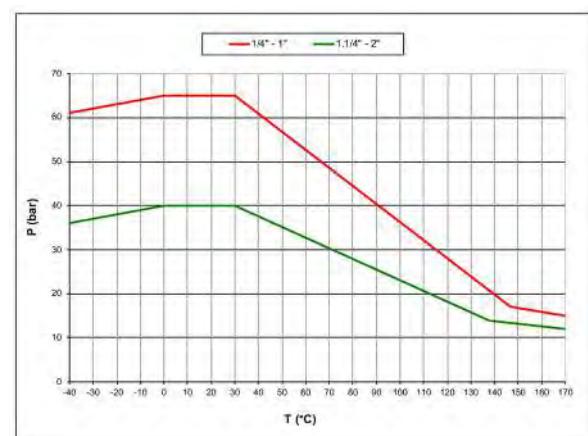

PRESSURE DROP CHART

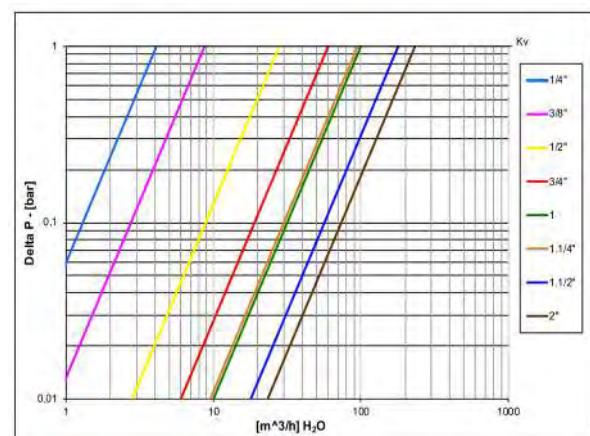



k.60 spring return

Female/Female 1/4" - 2", heavy duty - DIN 16722 M3 EN 10226-1

Access to fluid systems in public places could potentially convert into costs and safety problems. In order to avoid unattended valves being left open with negative economic or environmental consequences, **RuB** developed the automatic self-closing valve. The valve can be opened normally by rotating the handle 90° and when the user releases the handle, the valve shuts off automatically. Best solution for service stations, trucks, public areas, gardens. The same feature is useful in industrial applications, where a valve must not be left open unattended.

HIGH TEMPERATURE RESISTANCE

Now approved for HTB use (Hochtemperaturbeständigkeit) - Class B 0,1 (0,1 bar @650°C for at least 30 minutes).



H2 READY: product approved in EU acc.to EN331 (sizes 1/4" to 2") for the 1st, 2nd and 3rd gas families, therefore compatible with hydrogen use up to 50% in the gas mixture, as established in the 1st gas family of the EN437 (ref. G110)



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Handle stops on body to avoid stresses at stem
- Chrome plated brass ball for longer life

BODY

- Hot forged sand blasted, nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Valve length according to DIN 16722 M3 for sizes from 3/8" to 2" (DN10 to DN50). Size 1/4" (DN 8) complies to DIN 3202 M3.
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- 100% full port for maximum flow

HANDLE

- Robust spring ensures auto shutt-off with max pressure in valve
- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 65 bar (940 PSI) up to 1", 40 bar (600 PSI) over 1" non-shock cold working pressure
- -20°C to +170°C (-4°F to +350°F)
- For use with dangerous fluids temperature rating is
- -20°C to +60°C (-4°F to +140°F) and pressure rating is
- 5 bar (72 PSI) / **HTB** Class B 0,1
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball (1.4401 / AISI 316)
- Custom design
- Stainless steel handle (1.4016 / AISI 430)


PED DIRECTIVE

- Assessment according to Pressure Equipment Directive 2014/68/UE module B+D by ICIM (0425)

APPROVED BY OR IN COMPLIANCE WITH

- DVGW (Germany) – MOP 5 B 0,1
- GOST-R (Russia)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.

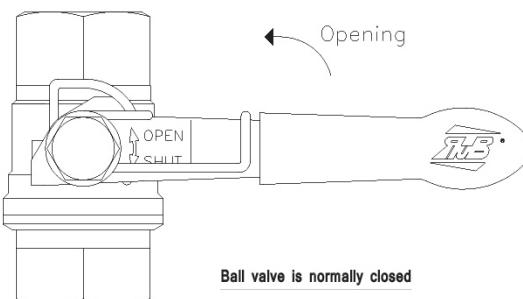


k.60 spring return XCEK60MR - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty Material | |
|------------------|--|---------------|-------------------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated end-cap | 1 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW617N |
| 6 | Unplated spring nut | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | Spring return | 1 | 1.4310 (AISI 302) |
| 9 | Yellow PVC coated Geomet® steel handle | 1 | DC01 |

1 1/4"-2" hollow ball

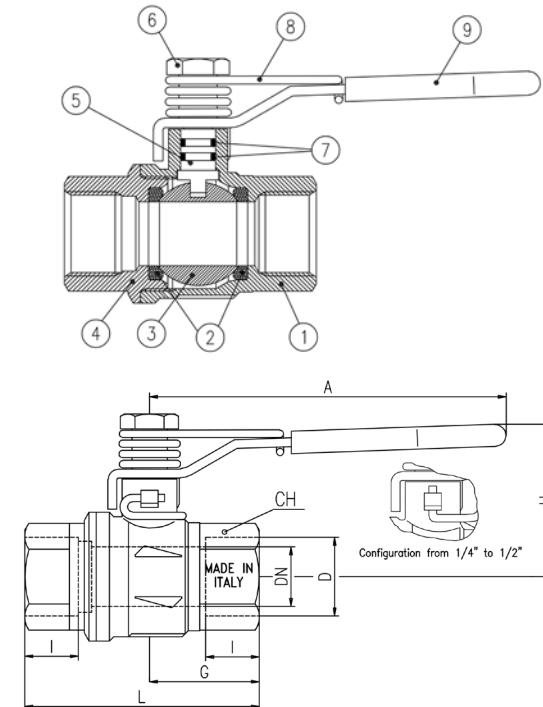


Compliant to CE 2014/68/UE product Equipment category III Module B+D


| Code | S60B05M | S60C05M | S60D05M | S60E05M | S60F05M | S60G05M | S60H05M | S60I05M |
|-----------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| I (mm) | 14 | 14 | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 50 | 60 | 75 | 80 | 90 | 110 | 120 | 140 |
| G (mm) | 25.5 | 25.5 | 30.5 | 37 | 45.5 | 52 | 59 | 67.5 |
| A (mm) | 100 | 100 | 100 | 120 | 120 | 158 | 158 | 158 |
| H (mm) | 40 | 40 | 43 | 51 | 55.5 | 75 | 81 | 88.5 |
| CH (mm) | 22 | 22 | 27 | 32 | 41 | 50 | 55 | 70 |
| PN (bar) | 65 | 65 | 65 | 65 | 65 | 40 | 40 | 40 |
| Kv (m³/h) | 4.1 | 8.7 | 28 | 60 | 100 | 95 | 179 | 233 |

Ball valves are marked CE on handle from 1 1/4" to 2" as follow: CE 0425 Cat IIIB+D PS: 5 GAS TS1: -20°C TS2: +60°C

PRESSURE-TEMPERATURE CHART

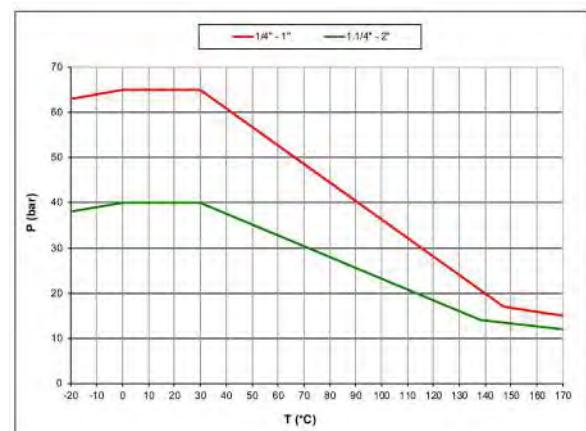

PRESSURE DROP CHART

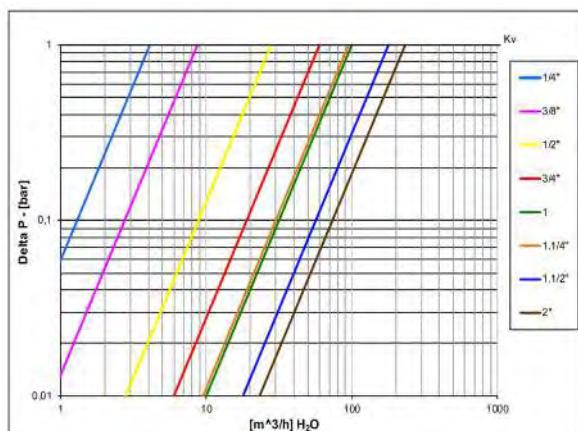



s.7200L

3-way, lever, 4 seats, L-port (diverting)

Female/Female/Female
1/2" - 1"

The RuB S.7200L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn of the handle, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation. It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly. The valve can be purchased separately, with handle or with a RuB actuator already mounted.



QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design
- Four seats design for mixing of various fluids in the system

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- 100% full port for maximum flow

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- S.7200 without handle, actuator ready
- Various actuator linkage kit

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 30 Bar up to 1", 20 bar over 1", non-shock cold working pressure
- -20°C to +170°C (-4°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats, L-port (s.7200L) or T-port (s.7300L)

PED DIRECTIVE


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking.

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia – Kazakhstan – Belarus)

NOTE: approvals apply to specific configurations/sizes only.

S.72 3-WAY "L" PORT OPERATING POSITIONS

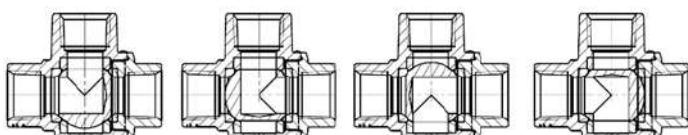


s.7200L XCES7200L - 5466


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|--|------|------------------------|
| 1 | Nickel plated body (External nickel plated, unplated inside) | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Seat | 2 | PTFE |
| 4 | Chrome plated ball | 1 | CW617N |
| 5 | Nickel plated end-cap (External nickel plated, unplated inside) | 1 | CW617N |
| 6 | Washer | 1 | PTFE carbon filled 25% |
| 7 | Nickel plated stem O-ring design | 1 | CW617N |
| 8 | O-Ring | 2 | FPM |
| 9 | Screw handle stop | 1 | CW617N |
| 10 | Spring | 1 | 1.4310 / AISI 302 |
| 11 | Unplated spring bushing | 1 | CW617N |
| 12 | Stainless steel screw | 1 | 1.4301 / AISI 304 |
| 13 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 14 | Black dipped coating | 1 | PVC |

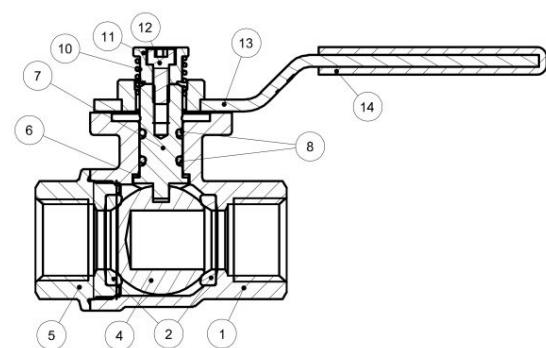

| Code | S72D00L | S72E00L | S72F00L |
|--|-----------|-----------|-----------|
| Size (inch) | 1/2" | 3/4" | 1" |
| DN (mm) | 15 | 20 | 25 |
| I (mm) | 16.5 | 19 | 22.5 |
| L (mm) | 65 | 79 | 92.5 |
| G (mm) | 32.5 | 39.5 | 46.5 |
| H (mm) | 32.5 | 39.5 | 42.5 |
| N (mm) | 34.5 | 42 | 49.5 |
| ØA (mm) | 36 | 36 | 36 |
| ØC (mm) | Ø5.2 (M6) | Ø5.2 (M6) | Ø5.2 (M6) |
| p (mm) | 100 | 100 | 100 |
| H1 (mm) | 49 | 56 | 59 |
| S (mm) | 2.2 | 2.2 | 2.2 |
| T (mm) | 10 | 10 | 10 |
| F (mm) | 7.3 | 8.3 | 8.3 |
| CH (mm) | 27 | 32 | 41 |
| Flange connection DIN ISO 522 DIN 3337 | F03 | F03 | F03 |

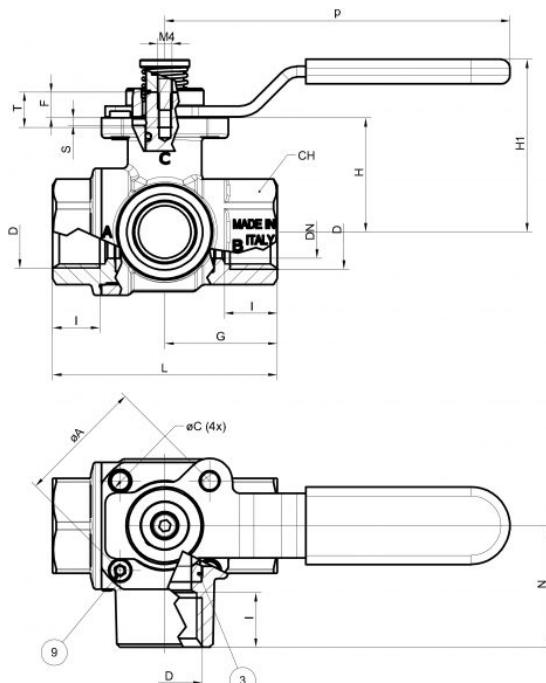

TORQUE FOR ACTUATOR SIZING N.M

| Delta P --> | 0÷16 bar | |
|-------------|----------|----------|
| Valve size | to open | to close |
| 1/2" | 10.5 | 10.5 |
| 3/4" | 13 | 13 |
| 1" | 29.5 | 29.5 |

TORQUE CORRECTION FACTORS

Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:

| | |
|--|---------|
| Lubricating oils or liquids | 0.8 |
| Dry gases, natural gas | 1.5 |
| Slurries or liquids bearing abrasive particles | 1.5÷2.5 |



s.7241L NPT

3-way, lever, 4 seats, L-port (diverting)

Female/Female/Female
1/2" - 1"

The Rub S.7241L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn of the handle, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation.

It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly.

The valve can be purchased separately, with handle or with a Rub actuator already mounted.



QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design
- Four seats design for mixing of various fluids in the system

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- 100% full port for maximum flow

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 300 PSI non-shock cold working pressure
- -4°F to +302°F (-20°C to +150°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST


- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats & T-port (s.7341L) or 2 seats & L-port (s.7641L)

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

S.72 3-WAY "L" PORT OPERATING POSITIONS

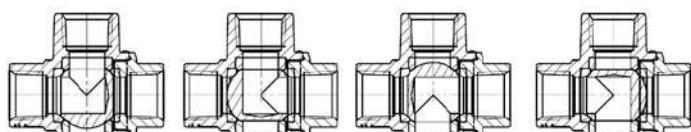

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- S.7241 without handle, actuator ready
- Various actuator linkage kit






s.7241L NPT XCES7241L - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|----------------------------------|------|------------------------|
| 1 | Sand blasted unplated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Seat | 2 | PTFE |
| 4 | Chrome plated ball | 1 | CW617N |
| 5 | Sand blasted unplated end-cap | 1 | CW617N |
| 6 | Washer | 1 | PTFE carbon filled 25% |
| 7 | Nickel plated stem O-ring design | 1 | CW617N |
| 8 | O-Ring | 2 | FPM |
| 9 | Screw handle stop | 1 | CW617N |
| 10 | Black dipped coating | 1 | 1.4310 / AISI302 |
| 11 | Stainless steel screw | 1 | CW617N |
| 12 | Unplated stop | 1 | 1.4301 / AISI304 |
| 13 | Zinc plated steel nut | 1 | DD11 (EN10111) |
| 14 | Stainless steel Exagonal screw | 1 | PVC |

| Code | S72D41L | S72E41L | S72F41L |
|--------------------------|--------------|--------------|--------------|
| Size (inch) | 1/2" | 3/4" | 1" |
| DN (inch) | 0.591 | 0.787 | 0.984 |
| I (inch) | 0.610 | 0.709 | 0.827 |
| L (inch) | 2.559 | 3.110 | 3.642 |
| G (inch) | 1.280 | 1.555 | 1.831 |
| H (inch) | 1.280 | 1.555 | 1.673 |
| N (inch) | 1.358 | 1.654 | 1.949 |
| ØA (inch) | 1.417 | 1.417 | 1.417 |
| ØC (inch) | Ø 0.205 (M6) | Ø 0.205 (M6) | Ø 0.205 (M6) |
| p (inch) | 3.937 | 3.937 | 3.937 |
| H1 (inch) | 1.929 | 2.210 | 2.328 |
| S (inch) | 0.087 | 0.087 | 0.087 |
| T (inch) | 0.394 | 0.394 | 0.394 |
| F (inch) | 0.287 | 0.327 | 0.327 |
| CH (inch) | 1.063 | 1.260 | 1.614 |
| Flange connection | | | |
| DIN ISO 522 | F03 | F03 | F03 |
| DIN 3337 | | | |

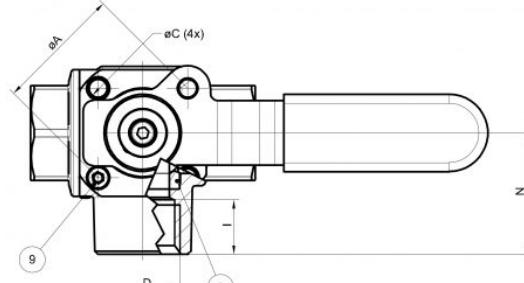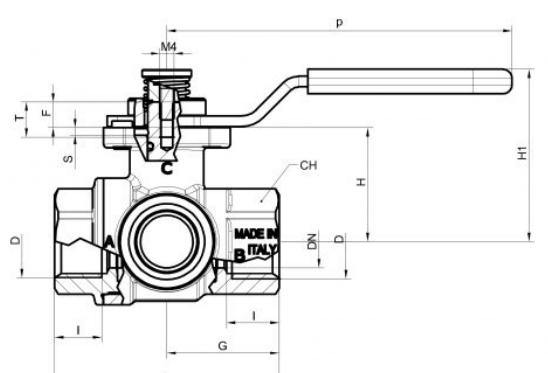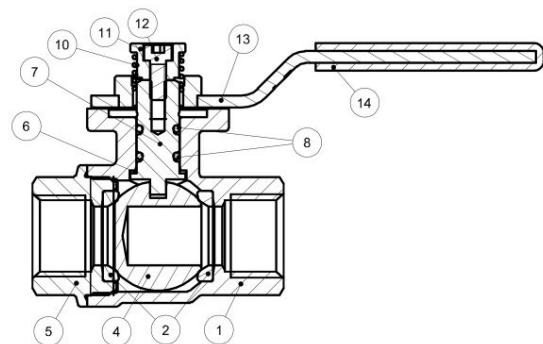

TORQUE FOR ACTUATOR SIZING IN-LB

| Delta P --> | 0÷230 PSI | |
|-------------|-----------|----------|
| Valve size | to open | to close |
| 1/2" | 93 | 93 |
| 3/4" | 115 | 115 |
| 1" | 261 | 261 |

TORQUE CORRECTION FACTORS

Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:

| | |
|--|---------|
| Lubricating oils or liquids | 0.8 |
| Dry gases, natural gas | 1.5 |
| Slurries or liquids bearing abrasive particles | 1.5÷2.5 |



s.7300L

3-way, lever, 4 seats, T-port

Female/Female/Female

1/4" - 2"

EN 10226-1

The s.7300L series has a ball seal at every port, and offers a wide variety of possible flow configurations. Positive shut-off can be achieved at any of the exiting ports. By specifying the appropriate ball port configuration, the T-port design allows flow direction to be adjusted for virtually any situation and is ideal for mixing applications. Our s.73 multi-port valves can reduce the number of valves required in piping systems and can significantly lower overall costs by replacing two or three conventional 2-way valves, eliminating excess fittings, saving space and simplifying automation.



QUALITY

- Electronic 100% seal test guaranteed
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO 5211 /DIN 3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way T-port design for flow mixing

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design
- Four seats design for mixing of various fluids in the system

THREADS

- EN 10226-1, ISO 228 parallel female threads

FLOW

- 100% full port for maximum flow

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- S.7300 without handle actuator ready
- Various actuator linkage kit

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 20 bar (300 PSI) non-shock cold working pressure
- -20°C to +150°C (-4°F to +302°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Stainless steel stem
- Configurations with 4 seats & L-port (s.7200L) or 2 seats & L-port (s.7600L)

PED DIRECTIVE


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.

S.73 3-WAY "T" PORT OPERATING POSITIONS

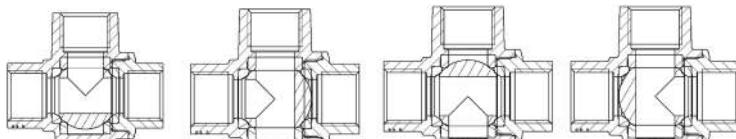


s.7300L XCES7300L - 5708


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| | Part description | Q.ty | Material |
|----|---|------|------------------------|
| 1 | Nickel plated body (external nickel plated, unplated inside) | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Seat | 2 | PTFE |
| 4 | Chrome plated ball | 1 | CW617N |
| 5 | Nickel plated end cap (external nickel plated, unplated inside) | 1 | CW617N |
| 6 | Washer | 1 | PTFE carbon filled 25% |
| 7 | Nickel plated stem O-ring design | 1 | CW617N |
| 8 | O-Ring | 2 | FPM |
| 9 | Screw handle stop | 1 | CW617N |
| 10 | Spring | 1 | 1.4310 / AISI 302 |
| 11 | Unplated spring bushing | 1 | CW617N |
| 12 | Stainless steel screw | 1 | 1.4301 / AISI 304 |
| 13 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 14 | Black dipped coating | 1 | PVC |
| 15 | Unplated cap | 1 | CW614N |
| 16 | Stainless steel Hexagonal screw | 1 | 1.4301 / AISI304 |
| 17 | Square adapter 11-14 (only for 1 1/4" size) | 1 | Steel |
| 18 | Washer | 1 | PTFE |
| 19 | Unplated reduction (only 1/4" and 3/8" sizes) | 3 | CW617N |

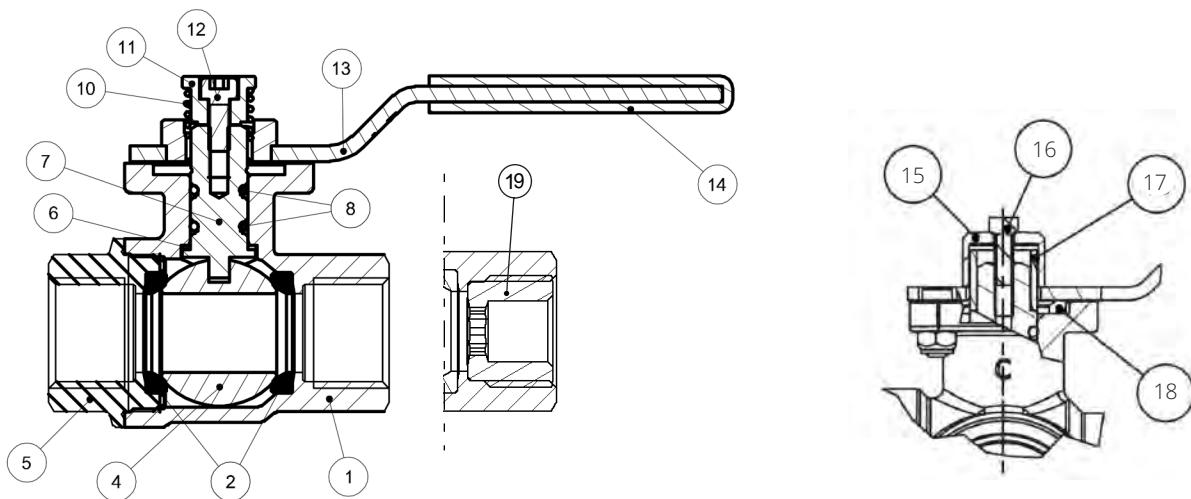

| Code | S73B00L | S73C00L | S73D00L | S73E00L | S73F00L | S73G00L | S73H00L | S73I00L |
|---|---------|---------|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 30.4 | 38 | 48 |
| I (mm) | 12 | 12 | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 65 | 65 | 65 | 79 | 92.5 | 109.5 | 126 | 150 |
| G (mm) | 32.5 | 32.5 | 32.5 | 39.5 | 46.5 | 55 | 63 | 75 |
| H (mm) | 32.5 | 32.5 | 32.5 | 39.5 | 42.5 | 56 | 62.5 | 72 |
| N (mm) | 34.5 | 34.5 | 34.5 | 42 | 49.5 | 60 | 69 | 82 |
| ØA (mm) | 36 | 36 | 36 | 36 | 36 | 50 | 50 | 50 |
| ØC (mm) | Ø5.6 | Ø5.6 | Ø5.6 | Ø5.6 | Ø5.6 | Ø6.6 | Ø6.6 | Ø6.6 |
| p (mm) | 103 | 103 | 103 | 103 | 103 | 145 | 145 | 145 |
| H1 (mm) | 49 | 49 | 49 | 56 | 59 | 79.3 | 85.5 | 93.4 |
| S (mm) | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 3.2 | 3.2 | 3.2 |
| T (mm) | 10 | 10 | 10 | 10 | 10 | 14 | 14 | 14 |
| F (mm) | 7.3 | 7.3 | 7.3 | 8.3 | 8.3 | 14.5 | 14.5 | 14.5 |
| CH (mm) | 27 | 27 | 27 | 32 | 41 | 50 | 55 | 70 |
| Flange connection DIN ISO 522 DIN 3337 | F03 | F03 | F03 | F03 | F03 | F05 | F05 | F05 |
| Kv (m³/h) straight pattern | TBD | TBD | 9.7 | 28.2 | 43.3 | 57.0 | 94.5 | 161.0 |
| Kv (m³/h) 90° pattern | TBD | TBD | 5.3 | 11.6 | 16.8 | 26.7 | 43.3 | 69.2 |

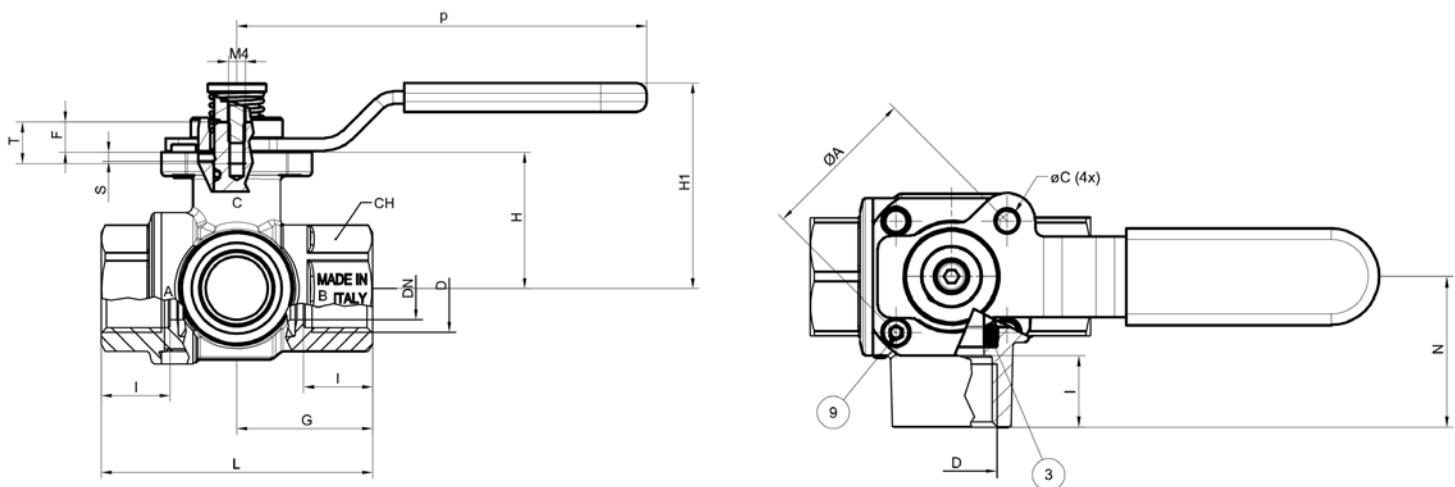


TORQUE FOR ACTUATOR SIZING N.M

| Delta P --> | 0÷16 bar | |
|--------------------|----------|----------|
| Valve size | to open | to close |
| 1/4" - 3/8" - 1/2" | 10,5 | 10,5 |
| 3/4" | 13 | 13 |
| 1" | 29,5 | 29,5 |
| 1 1/4" | 14 | 14 |
| 1 1/2" | 23 | 23 |
| 2" | 38 | 38 |


With the configuration of T-port a stop pin can be fixed in any position of the 4 provided in the flange (1, 2, 3 or 4) and the lever can be rotated freely through 90°, the flow assumes the directions indicated in the diagram; in case of need the lever can be pulled upwards and you can reach any of the four possible positions.

An alternative is to mount 2 pins in 2 near holes (e.g. 1 and 2). In this case, the valve does not assume a predetermined position but can be actuated just by pulling the lever towards the top.


The valve allows also to block the lever thanks to the addition of a lock on the lever's protrusion (in the drawing you can see position 2). The mixing configuration is achieved by placing the pin in position 2. The flows to be mixed enter through A and C and exit through A+C.

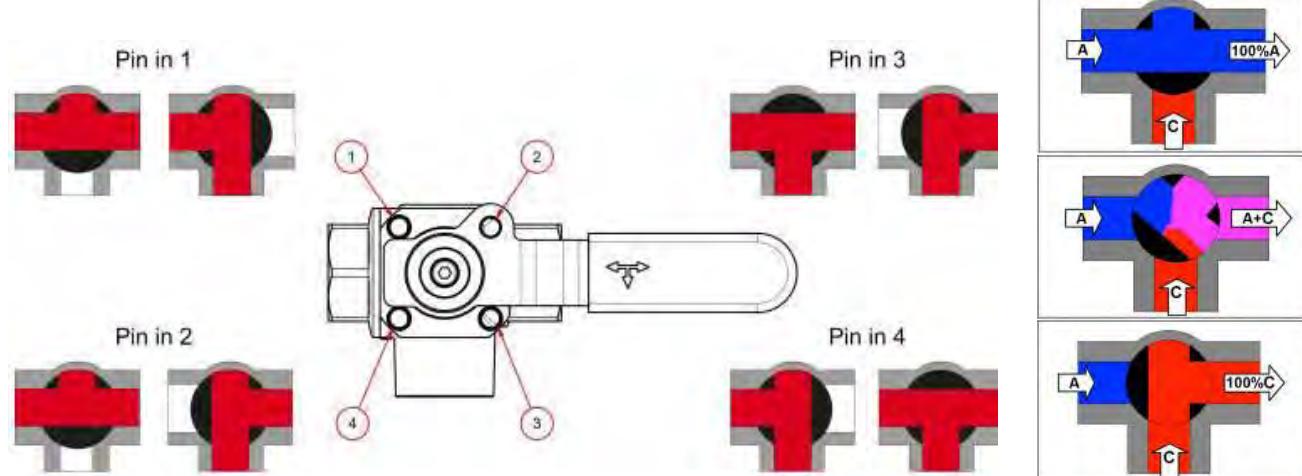

PRESSURE DROP CHART (STRAIGHT FLOW PATTERN)

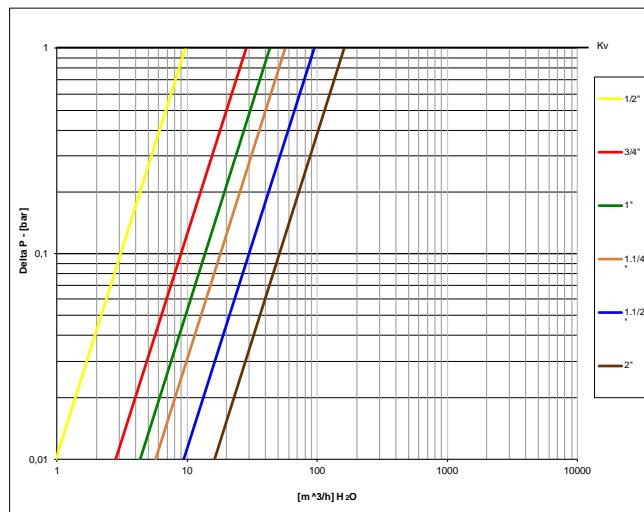

PRESSURE DROP CHART (90° FLOW PATTERN)

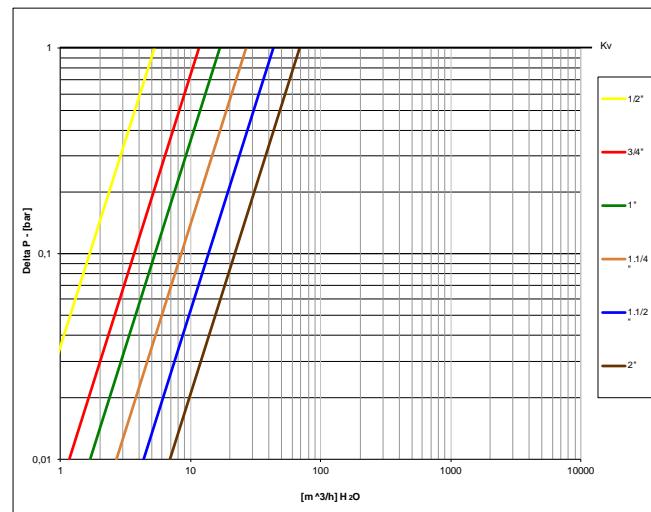



s.7341L

3-way, lever, 4 seats, T-port

Female/Female/Female

1/2" - 2"

ISO 5211

The s.7341L series has a ball seal at every port, and offers a wide variety of possible flow configurations.

Positive shut-off can be achieved at any of the exiting ports. By specifying the appropriate ball port configuration, the T-port design allows flow direction to be adjusted for virtually any situation and is ideal for mixing applications. Our s.73 multi-port valves can reduce the number of valves required in piping systems and can significantly lower overall costs by replacing two or three conventional 2-way valves, eliminating excess fittings, saving space and simplifying automation.



QUALITY

- Electronic 100% seal test guaranteed
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO 5211 /DIN 3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way T-port design for flow mixing

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design
- Four seats design for mixing of various fluids in the system

THREADS

- NPT taper ANSI B.1.20.1 female threads

FLOW

- 100% full port for maximum flow

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 300 PSI (20 bar) non-shock cold working pressure
- -4°F to +302°F (-20°C to +150°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST


- Custom design
- Stainless steel stem
- Configurations with 4 seats & L-port (s.7241L) or 2 seats & L-port (s.7641L)

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

S.73 3-WAY "T" PORT OPERATING POSITIONS

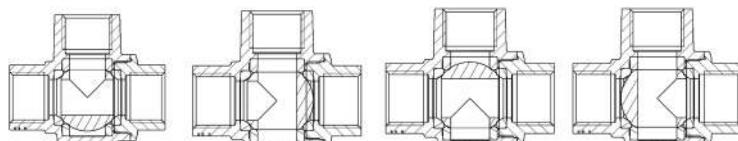

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- S.7341 without handle actuator ready
- Various actuator linkage kit




s.7341L XCES7341L - 5466


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| | Part description | Q.ty | Material |
|----|---|------|------------------------|
| 1 | Sand blasted unplated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Seat | 2 | PTFE |
| 4 | Chrome plated ball | 1 | CW617N |
| 5 | Sand blasted unplated end-cap | 1 | CW617N |
| 6 | Washer | 1 | PTFE carbon filled 25% |
| 7 | Nickel plated stem O-ring design | 1 | CW617N |
| 8 | O-Ring | 2 | FPM |
| 9 | Screw handle stop | 1 | CW617N |
| 10 | Spring | 1 | 1.4310 / AISI 302 |
| 11 | Unplated spring bushing | 1 | CW617N |
| 12 | Stainless steel screw | 1 | 1.4301 / AISI 304 |
| 13 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 14 | Black dipped coating | 1 | PVC |
| 15 | Unplated cap | 1 | CW614N |
| 16 | Stainless steel Hexagonal screw | 1 | 1.4301 / AISI304 |
| 17 | Square adapter 11-14 (only for 1 1/4" size) | 1 | Steel |
| 18 | Washer | 1 | PTFE |

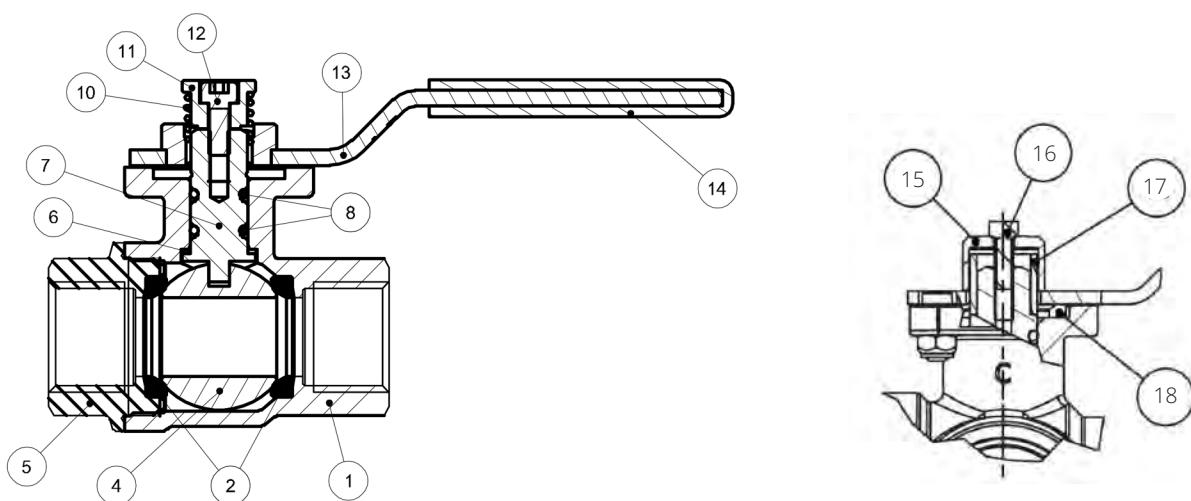

| Code | S73D41L | S73E41L | S73F41L | S73G41L | S73H41L | S73I41L |
|---|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (inch) | 0.591 | 0.787 | 0.984 | 1.197 | 1.496 | 1.890 |
| I (inch) | 0.610 | 0.709 | 0.827 | 0.906 | 0.965 | 1.043 |
| L (inch) | 2.559 | 3.110 | 3.642 | 4.331 | 4.961 | 5.906 |
| G (inch) | 1.280 | 1.555 | 1.831 | 2.165 | 2.480 | 2.953 |
| H (inch) | 1.280 | 1.555 | 1.673 | 2.205 | 2.460 | 2.854 |
| N (inch) | 1.358 | 1.654 | 1.949 | 2.362 | 2.717 | 3.228 |
| ØA (inch) | 1.417 | 1.417 | 1.417 | 1.969 | 1.969 | 1.969 |
| ØC (inch) | Ø 0.22 | Ø 0.22 | Ø 0.22 | Ø 0.26 | Ø 0.26 | Ø 0.26 |
| p (inch) | 4.055 | 4.055 | 4.055 | 5.709 | 5.709 | 5.709 |
| H1 (inch) | 1.929 | 2.210 | 2.328 | 3.122 | 3.366 | 3.677 |
| S (inch) | 0.087 | 0.087 | 0.087 | 0.126 | 0.126 | 0.126 |
| T (inch) | 0.394 | 0.394 | 0.394 | 0.551 | 0.551 | 0.551 |
| F (inch) | 0.287 | 0.327 | 0.327 | 0.571 | 0.571 | 0.571 |
| CH (inch) | 1.063 | 1.260 | 1.614 | 1.969 | 2.165 | 2.756 |
| Flange connection DIN ISO 522 DIN 3337 | F03 | F03 | F03 | F05 | F05 | F05 |
| P (ISO 262 Thread) | M4 | M4 | M4 | M5 | M5 | M5 |
| Cv (GPM) straight pattern | 11.2 | 32.5 | 50.0 | 65.8 | 109.2 | 186 |
| Cv (GPM) 90° pattern | 6.1 | 13.4 | 19.5 | 30.9 | 50.0 | 80.0 |

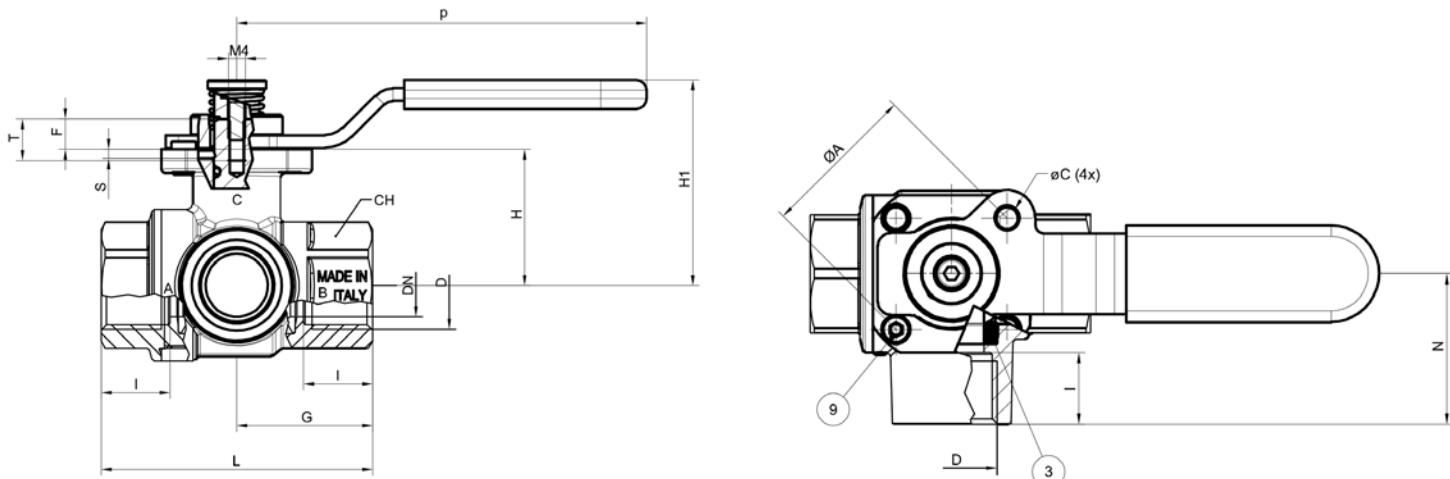


TORQUE FOR ACTUATOR SIZING N.M

| Delta P --> | 0÷230 PSI | |
|-------------|-----------|----------|
| Valve size | to open | to close |
| 1/2" | 93 | 93 |
| 3/4" | 115 | 115 |
| 1" | 261 | 261 |
| 1 1/4" | 124 | 124 |
| 1 1/2" | 204 | 204 |
| 2" | 336 | 336 |


With the configuration of T-port a stop pin can be fixed in any position of the 4 provided in the flange (1, 2, 3 or 4) and the lever can be rotated freely through 90°, the flow assumes the directions indicated in the diagram; in case of need the lever can be pulled upwards and you can reach any of the four possible positions.

An alternative is to mount 2 pins in 2 near holes (e.g. 1 and 2). In this case, the valve does not assume a predetermined position but can be actuated just by pulling the lever towards the top.


The valve allows also to block the lever thanks to the addition of a lock on the lever's protrusion (in the drawing you can see position 2). The mixing configuration is achieved by placing the pin in position 2. The flows to be mixed enter through A and C and exit through A+C.

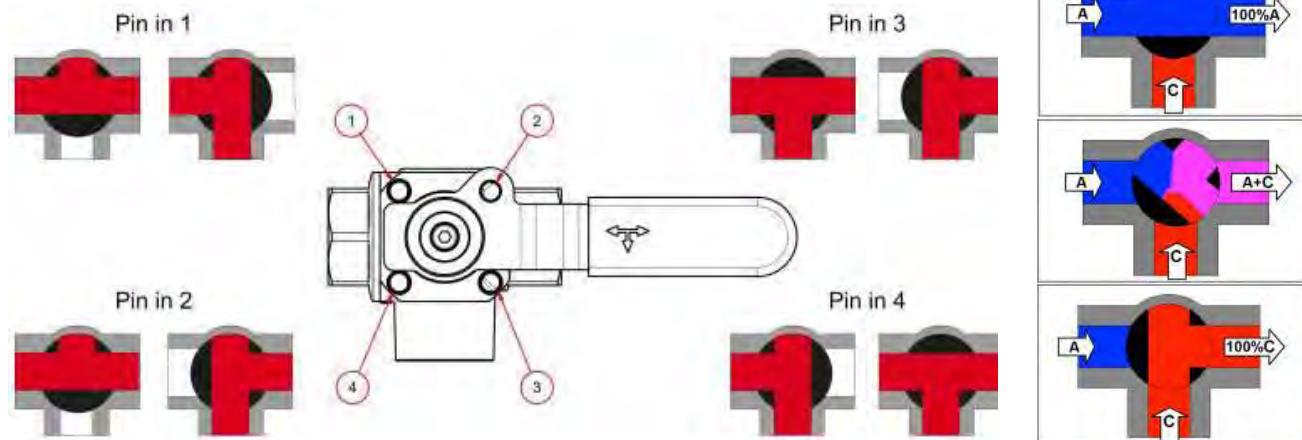

PRESSURE DROP CHART (STRAIGHT FLOW PATTERN)

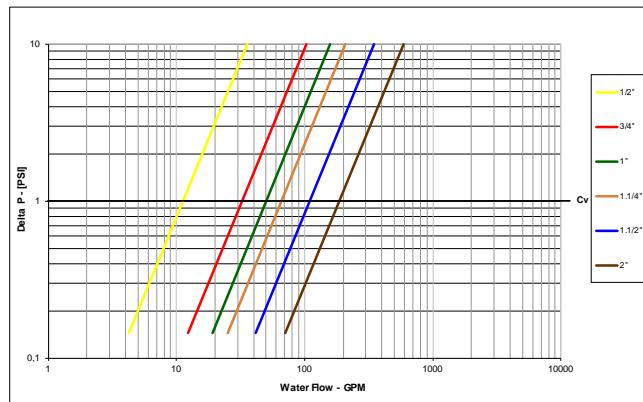

PRESSURE DROP CHART (90° FLOW PATTERN)

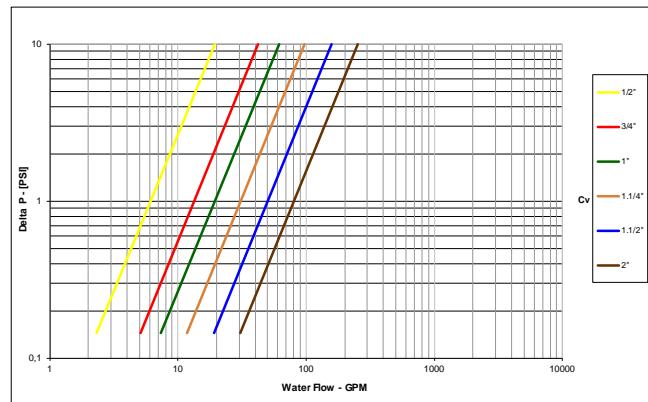



s.7350L

3-way, lever, 4 seats, T-port

Female/Female/Female

1/2" - 2"

ISO 7/1, BS21

The s.7350L series has a ball seal at every port, and offers a wide variety of possible flow configurations. Positive shut-off can be achieved at any of the exiting ports. By specifying the appropriate ball port configuration, the T-port design allows flow direction to be adjusted for virtually any situation and is ideal for mixing applications. Our s.73 multi-port valves can reduce the number of valves required in piping systems and can significantly lower overall costs by replacing two or three conventional 2-way valves, eliminating excess fittings, saving space and simplifying automation.



QUALITY

- Electronic 100% seal test guaranteed
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO 5211 /DIN 3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way T-port design for flow mixing

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design
- Four seats design for mixing of various fluids in the system

THREADS

- ISO71, BS21 BSPT taper female threads

FLOW

- 100% full port for maximum flow

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- S.7350 without handle actuator ready
- Various actuator linkage kit

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 20 bar (300 PSI) non-shock cold working pressure
- -20°C to +150°C (-4°F to +302°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Stainless steel stem
- Configuration with 2 seats & L-port (s.7650L)

PED DIRECTIVE


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

S.73 3-WAY "T" PORT OPERATING POSITIONS


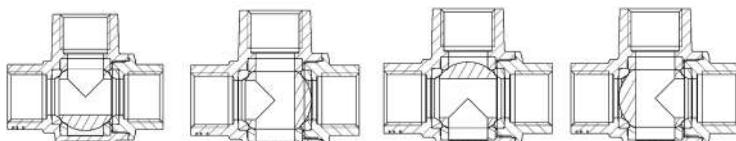


s.7350L XCES7350L - 5466


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| | Part description | Q.ty | Material |
|----|---|------|------------------------|
| 1 | Nickel plated body (external nickel plated, unplated inside) | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Seat | 2 | PTFE |
| 4 | Chrome plated ball | 1 | CW617N |
| 5 | Nickel plated end cap (external nickel plated, unplated inside) | 1 | CW617N |
| 6 | Washer | 1 | PTFE carbon filled 25% |
| 7 | Nickel plated stem O-ring design | 1 | CW617N |
| 8 | O-Ring | 2 | FPM |
| 9 | Screw handle stop | 1 | CW617N |
| 10 | Spring | 1 | 1.4310 / AISI 302 |
| 11 | Unplated spring bushing | 1 | CW617N |
| 12 | Stainless steel screw | 1 | 1.4301 / AISI 304 |
| 13 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 14 | Black dipped coating | 1 | PVC |
| 15 | Unplated cap | 1 | CW614N |
| 16 | Stainless steel Hexagonal screw | 1 | 1.4301 / AISI304 |
| 17 | Square adapter 11-14 (only for 1 1/4" size) | 1 | Steel |
| 18 | Washer | 1 | PTFE |

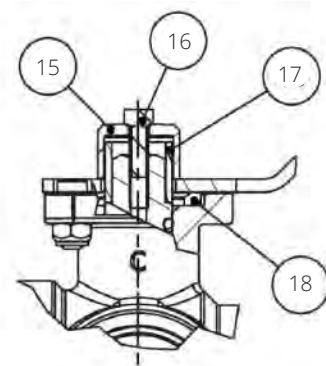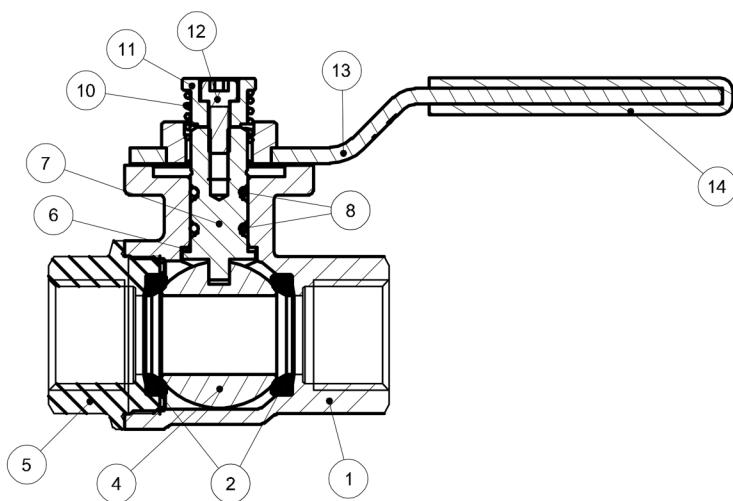

| Code | S73D50L | S73E50L | S73F50L | S73G50L | S73H50L | S73I50L |
|---|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 15 | 20 | 25 | 30.4 | 38 | 48 |
| I (mm) | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 65 | 79 | 92.5 | 109.5 | 126 | 150 |
| G (mm) | 32.5 | 39.5 | 46.5 | 55 | 63 | 75 |
| H (mm) | 32.5 | 39.5 | 42.5 | 56 | 62.5 | 72 |
| N (mm) | 34.5 | 42 | 49.5 | 60 | 69 | 82 |
| ØA (mm) | 36 | 36 | 36 | 50 | 50 | 50 |
| ØC (mm) | Ø5.6 | Ø5.6 | Ø5.6 | Ø6.6 | Ø6.6 | Ø6.6 |
| p (mm) | 103 | 103 | 103 | 145 | 145 | 145 |
| H1 (mm) | 49 | 56 | 59 | 79.3 | 85.5 | 93.4 |
| S (mm) | 2.2 | 2.2 | 2.2 | 3.2 | 3.2 | 3.2 |
| T (mm) | 10 | 10 | 10 | 14 | 14 | 14 |
| F (mm) | 7.3 | 8.3 | 8.3 | 14.5 | 14.5 | 14.5 |
| CH (mm) | 27 | 32 | 41 | 50 | 55 | 70 |
| Flange connection DIN ISO 522 DIN 3337 | F03 | F03 | F03 | F05 | F05 | F05 |
| Kv (m³/h) straight pattern | 9.7 | 28.2 | 43.3 | 57.0 | 94.5 | 161.0 |
| Kv (m³/h) 90° pattern | 5.3 | 11.6 | 16.8 | 26.7 | 43.3 | 69.2 |

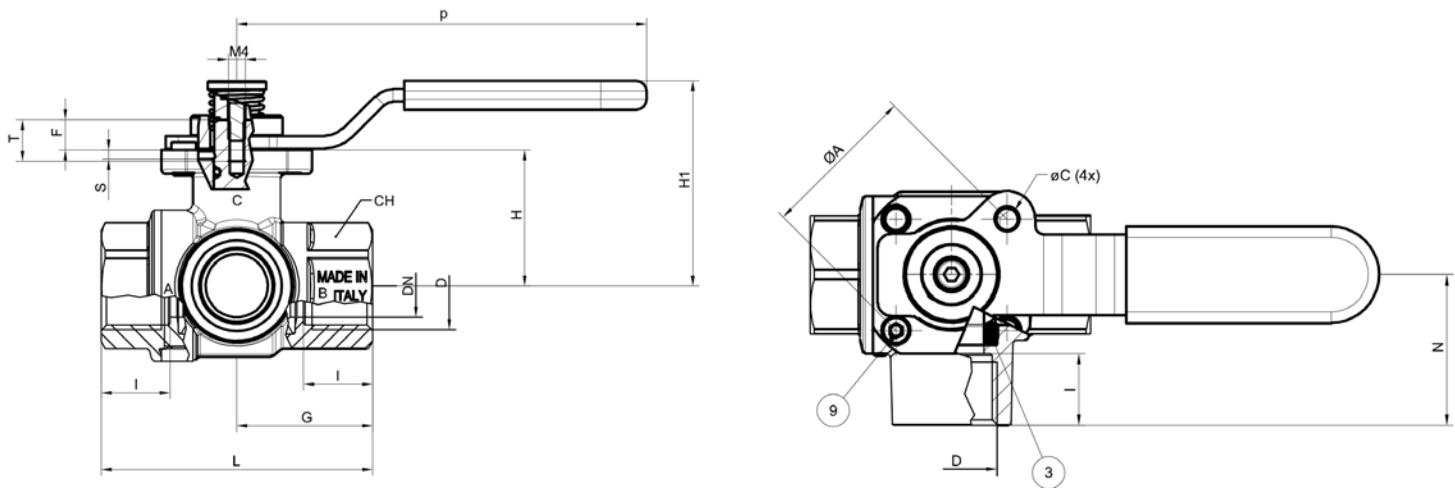


TORQUE FOR ACTUATOR SIZING N.M

| Delta P --> | 0÷16 bar | |
|-------------|----------|----------|
| Valve size | to open | to close |
| 1/2" | 10,5 | 10,5 |
| 3/4" | 13 | 13 |
| 1" | 22 | 22 |
| 1 1/4" | 14 | 14 |
| 1 1/2" | 23 | 23 |
| 2" | 38 | 38 |


With the configuration of T-port a stop pin can be fixed in any position of the 4 provided in the flange (1, 2, 3 or 4) and the lever can be rotated freely through 90°, the flow assumes the directions indicated in the diagram; in case of need the lever can be pulled upwards and you can reach any of the four possible positions.

An alternative is to mount 2 pins in 2 near holes (e.g. 1 and 2). In this case, the valve does not assume a predetermined position but can be actuated just by pulling the lever towards the top.


The valve allows also to block the lever thanks to the addition of a lock on the lever's protrusion (in the drawing you can see position 2). The mixing configuration is achieved by placing the pin in position 2. The flows to be mixed enter through A and C and exit through A+C.

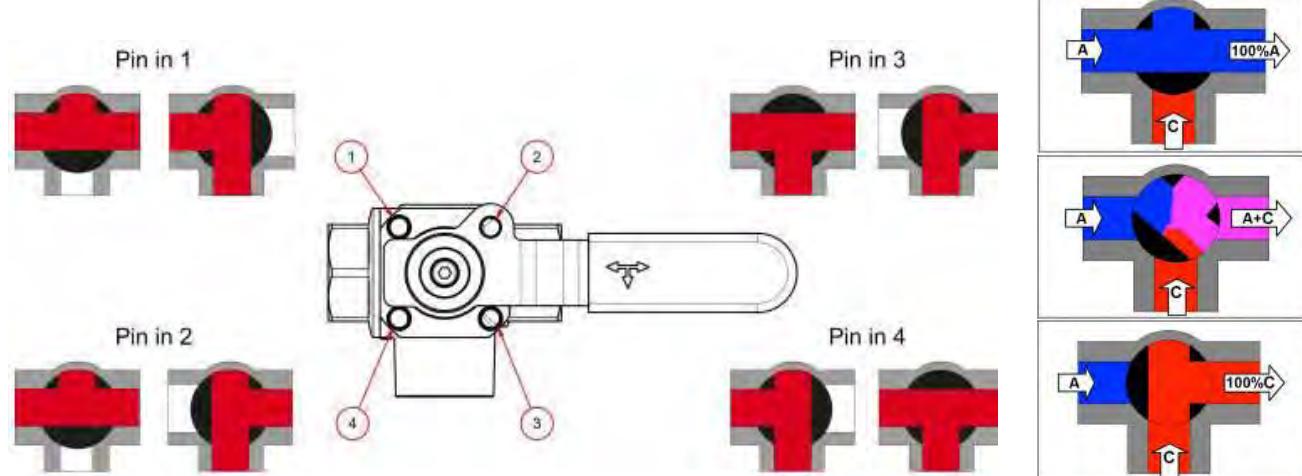

PRESSURE DROP CHART (STRAIGHT FLOW PATTERN)

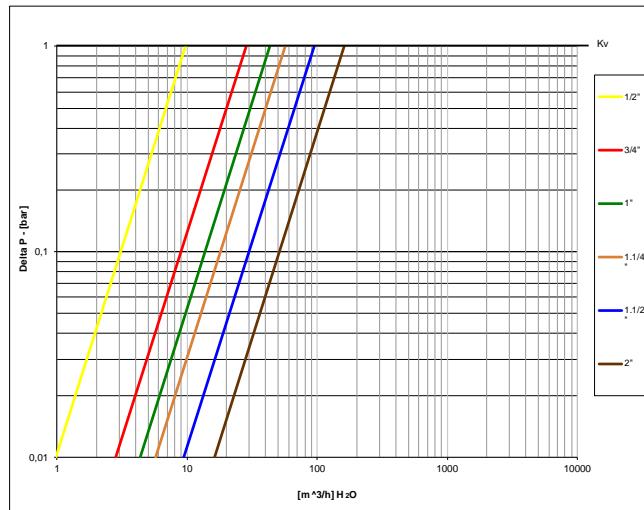

PRESSURE DROP CHART (90° FLOW PATTERN)

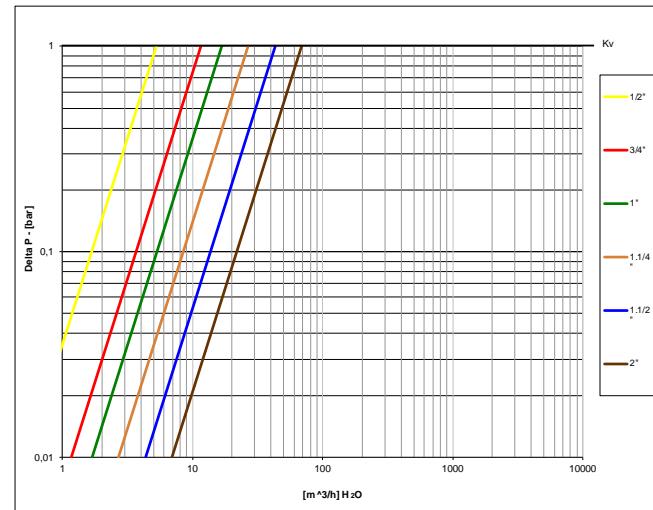



s.7600L

3-way, lever, 2 seats, L-port (diverting)

Female/Female/Female
1/4" - 2"
EN 10226-1

The RuB s.7600L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation. It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly. It features low operating torque and a special wear reducing self-compensating valve seat design that meets our 100,000 cycle life test requirement. The valve can be purchased separately, with handle or with a RuB actuator already mounted.



QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double O-rings at the stem for maximum safety

SEALING

- Reinforced PTFE self-lubricating seats with flexible-lip and wear compensation design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- 100% full port for maximum flow

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- Compact Power electric actuator
- ISO 7/1, BS 21 BSPT taper female threads
- S.7600 without handle, actuator ready
- Various actuator linkage kit

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 20 bar (300 PSI) non-shock cold working pressure
- -20°C to +150°C (-4°F to +302°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats & T-port (s.7300L) or 2 seats & L-port (s.7600L)

PED DIRECTIVE


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking.

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia – Kazakhstan – Belarus)

NOTE: approvals apply to specific configurations/sizes only.

S.76 3-WAY "L" PORT OPERATING POSITIONS

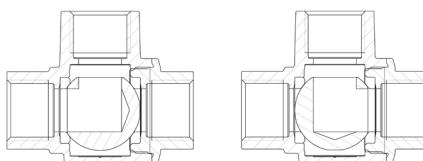

s.7600L XCES7600L - 5708

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|--------------------------|
| 1 | Nickel plated body (External nickel plated, unplated inside) | 1 | CW617N |
| 2 | Seat | 2 | PTFE graphite filled 15% |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Sand blasted nickel plated end cap (External nickel plated, unplated inside) | 1 | CW617N |
| 5 | Washer | 1 | PTFE carbon filled 25% |
| 6 | Nickel plated stem O-ring design | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | O-Ring | 2 | FPM |
| 9 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 10 | Black dipped coating | 1 | PVC |
| 11 | Stainless steel screw | 1 | 1.4301 / AISI304 |
| 12 | Unplated stop | 1 | CW617N |
| 13 | Zinc plated steel nut | 1 | Class 8 (UNI7474) |
| 14 | Unplated cap | 1 | CW614N |
| 15 | Stainless steel Exagonal screw | 1 | 1.4301 / AISI304 |
| 16 | Square adaptor 11-14 (only for 1 1/4 size) | 1 | Steel |
| 17 | Washer | 1 | PTFE |
| 18 | Unplated reduction (only 1/4" and 3/8" sizes) | 3 | CW617N |

| Code | S76B00L | S76C00L | S76D00L | S76E00L | S76F00L | S76G00L | S76H00L | S76I00L |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 30.4 | 38 | 48 |
| I (mm) | 12 | 12 | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 65 | 65 | 65 | 79 | 92.5 | 109.5 | 126 | 150 |
| G (mm) | 32.5 | 32.5 | 32.5 | 39.5 | 46.5 | 55 | 63 | 75 |
| H (mm) | 32.5 | 32.5 | 32.5 | 39.5 | 42.5 | 56 | 63.2 | 72 |
| N (mm) | 34.5 | 34.5 | 34.5 | 42 | 49.5 | 60 | 69 | 82 |
| A (mm) | 97 | 97 | 97 | 97 | 97 | 145 | 145 | 145 |
| ØC (mm) | Ø5.6 | Ø5.6 | Ø5.6 | Ø5.6 | Ø5.6 | Ø6.6 | Ø6.6 | Ø6.6 |
| H1 (mm) | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 23 | 23 | 23 |
| Square B (mm) | 9 | 9 | 9 | 9 | 9 | 11 | 11 | 14 |
| CH A/F (mm) | 27 | 27 | 27 | 32 | 41 | 50 | 55 | 70 |
| Flange connection | | | | | | | | |
| DIN ISO 522 | F03 | F03 | F03 | F03 | F03 | F05 | F05 | F05 |
| DIN 3337 | | | | | | | | |
| P (ISO 262 Thread) | M4 | M4 | M4 | M4 | M4 | M5 | M5 | M5 |
| Kv (m³/h) | TBD | TBD | 5.7 | 11.1 | 16.7 | 28.1 | 44.5 | 71.1 |

TORQUE FOR ACTUATOR SIZING N.M

| Delta P --> | 0÷16 bar | |
|-------------------|----------|----------|
| Valve size | to open | to close |
| 14" - 3/8" - 1/2" | 3,5 | 3,5 |
| 3/4" | 4,0 | 4,0 |
| 1" | 4,5 | 4,5 |
| 1 1/4" | 11,7 | 11,7 |
| 1 1/2" | 21,5 | 21,5 |
| 2" | 28,0 | 28,0 |

TORQUE CORRECTION FACTORS


Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:


Lubricating oils or liquids 0.8

Dry gases, natural gas 1.5

Slurries or liquids bearing abrasive particles 1.5÷2.5

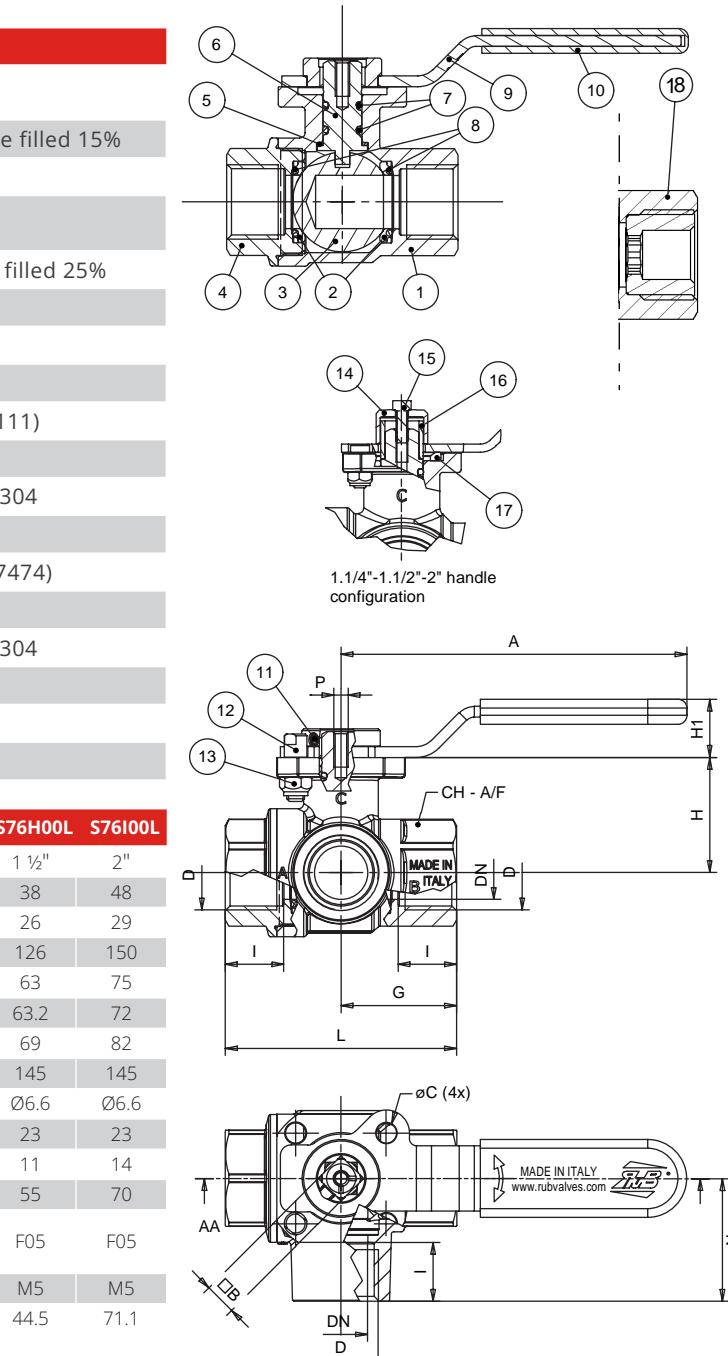

PRESSURE DROP CHART

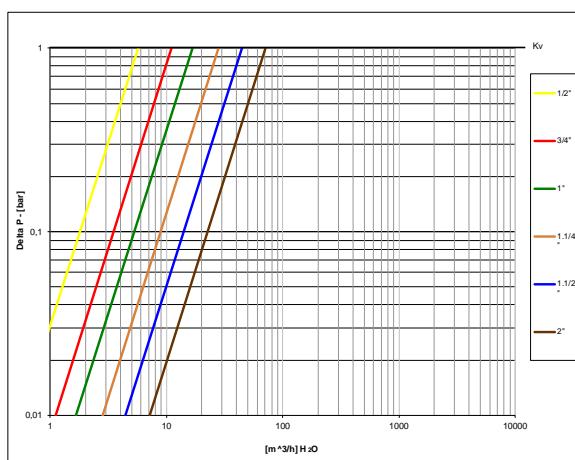



s.7641L

3-way, lever, 2 seats, L-port (diverting)

Female/Female/Female

1/2" - 2"

ISO 5211



The RuB s.7641L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation. It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly. It features low operating torque and a special wear reducing self-compensating valve seat design that meets our 100,000 cycle life test requirement. The valve can be purchased separately, with handle or with a RuB actuator already mounted.

QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double O-rings at the stem for maximum safety

SEALING

- Reinforced PTFE self-lubricating seats with flexible-lip and wear compensation design

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- 100% full port for maximum flow

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 450 PSI up to 1", 300 PSI over 1", non-shock cold working pressure
- -4°F to +350°F (-20°C to +170°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST


- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats, L-port (s.7241L) or T-port (s.7341L)

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

S.76 3-WAY "L" PORT OPERATING POSITIONS

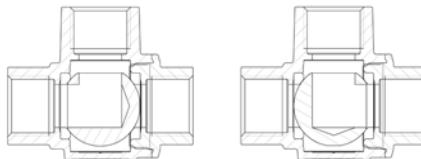

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- Compact Power electric actuator
- S.7641 without handle, actuator ready
- Various actuator linkage kit



s.7641L XCES7641L - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|----------------------------------|------|--------------------------|
| 1 | Sand blasted unplated body | 1 | CW617N |
| 2 | Seat | 2 | PTFE graphite filled 15% |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Sand blasted unplated end-cap | 1 | CW617N |
| 5 | Washer | 1 | PTFE carbon filled 25% |
| 6 | Nickel plated stem O-ring design | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | O-Ring | 2 | FPM |
| 9 | Geomet® plated steel handle | 1 | DD11(EN10111) |
| 10 | Black dipped coating | 1 | PVC |
| 11 | Stainless steel screw | 1 | 1.4401 / AISI304 |
| 12 | Unplated stop | 1 | CW617N |
| 13 | Zinc plated steel nut | 1 | Class 8 (UNI7474) |
| 14 | Stainless steel Exagonal screw | 1 | 1.4401 / AISI304 |
| 15 | Unplated cap | 1 | CW614N |
| 16 | Washer | 1 | PTFE |

| Code | S76D41L | S76E41L | S76F41L | S76G41L | S76H41L | S76I41L |
|--|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (inch) | 0.591 | 0.787 | 0.984 | 1.197 | 1.496 | 1.890 |
| I (inch) | 0.610 | 0.709 | 0.827 | 0.906 | 0.965 | 1.043 |
| L (inch) | 2.559 | 3.110 | 3.642 | 4.311 | 4.961 | 5.906 |
| G (inch) | 1.280 | 1.555 | 1.831 | 2.165 | 2.480 | 2.953 |
| H (inch) | 1.280 | 1.555 | 1.673 | 2.205 | 2.500 | 2.854 |
| N (inch) | 1.358 | 1.654 | 1.949 | 2.362 | 2.717 | 3.228 |
| A (inch) | 3.819 | 3.819 | 3.819 | 5.709 | 5.709 | 5.709 |
| ØC (inch) | Ø 0.22 | Ø 0.22 | Ø 0.22 | Ø 0.26 | Ø 0.26 | Ø 0.26 |
| H1 (inch) | 0.984 | 0.984 | 0.984 | 1.378 | 1.378 | 1.378 |
| Square B (inch) | 0.354 | 0.354 | 0.354 | 0.551 | 0.551 | 0.551 |
| CH A/F (inch) | 1.063 | 1.260 | 1.614 | 1.969 | 2.165 | 2.756 |
| Flange connection DIN ISO 5211 DIN 3337 | F03 | F03 | F03 | F05 | F05 | F05 |
| P (ISO 262 Thread) | M4 | M4 | M4 | M5 | M5 | M5 |
| CV (GPM) | 6.6 | 12.9 | 19.3 | 32.5 | 51.4 | 82.2 |

TORQUE FOR ACTUATOR SIZING IN-LB



| Delta P --> | 0÷230 PSI | |
|-------------|-----------|----------|
| Valve size | to open | to close |
| 1/2" | 31 | 31 |
| 3/4" | 36 | 36 |
| 1" | 40 | 40 |
| 1 1/4" | 104 | 104 |
| 1 1/2" | 190 | 190 |
| 2" | 248 | 248 |

TORQUE CORRECTION FACTORS



Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:


| | |
|--|---------|
| Lubricating oils or liquids | 0.8 |
| Dry gases, natural gas | 1.5 |
| Slurries or liquids bearing abrasive particles | 1.5÷2.5 |

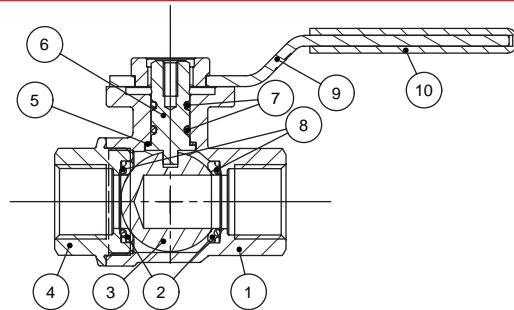

1.1/4"-1.1/2"-2" handle configuration

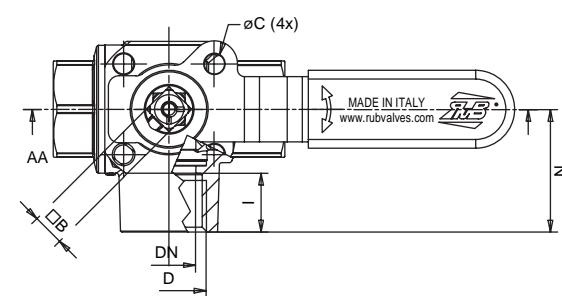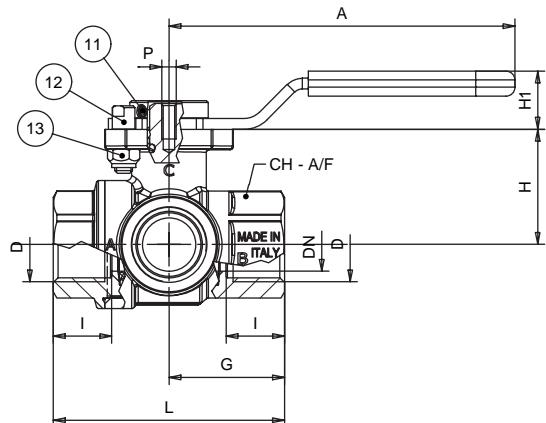

PRESSURE DROP CHART

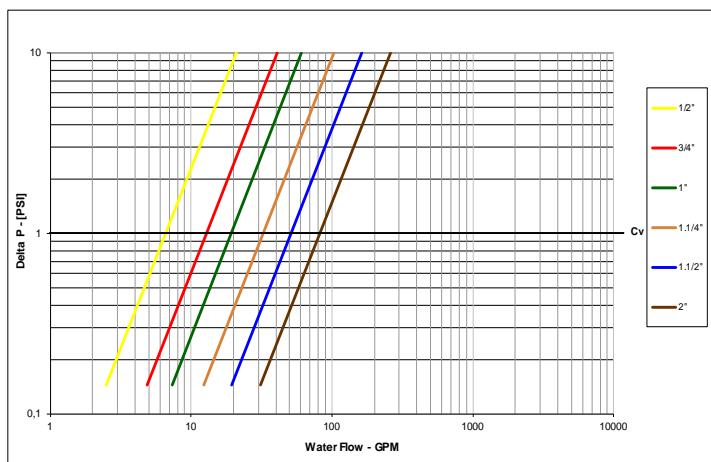



s.7650L

3-way, lever, 2 seats, L-port (diverting)

Female/Female/Female
1/2" - 2"
ISO 7/1, BS21

The RuB s.7650L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation. It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly. It features low operating torque and a special wear reducing self-compensating valve seat design that meets our 100,000 cycle life test requirement. The valve can be purchased separately, with handle or with a RuB actuator already mounted.



QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double O-rings at the stem for maximum safety

SEALING

- Reinforced PTFE self-lubricating seats with flexible-lip and wear compensation design

THREADS

- ISO 7/1, BS 21 BSPT taper female threads

FLOW

- 100% full port for maximum flow

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- Compact Power electric actuator
- S.7650 without handle, actuator ready
- Various actuator linkage kit

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 30 Bar up to 1", 20 bar over 1", non-shock cold working pressure
- -20°C to +170°C (-4°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats, L-port (s.7250L) or T-port (s.7350L)

PED DIRECTIVE


- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking.

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

S.76 3-WAY "L" PORT OPERATING POSITIONS

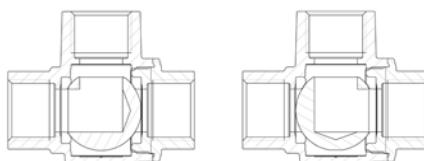

s.7650L XCES7650L - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|--------------------------|
| 1 | Sand blasted nickel plated body (External nickel plated, unplated inside) | 1 | CW617N |
| 2 | Seat | 2 | PTFE graphite filled 15% |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Sand blasted nickel plated end cap (External nickel plated, unplated inside) | 1 | CW617N |
| 5 | Washer | 1 | PTFE carbon filled 25% |
| 6 | Nickel plated stem O-ring design | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | O-Ring | 2 | FPM |
| 9 | Geomet® plated steel handle | 1 | DD11 (EN10111) |
| 10 | Black dipped coating | 1 | PVC |
| 11 | Stainless steel screw | 1 | 1.4301 / AISI304 |
| 12 | Unplated stop | 1 | CW617N |
| 13 | Zinc plated steel nut | 1 | Class 8 (UNI7474) |
| 14 | Unplated cap | 1 | CW614N |
| 15 | Stainless steel Exagonal screw | 1 | 1.4301 / AISI304 |
| 16 | Square adaptor 11-14 (only for 1 1/4 size) | 1 | Steel |
| 17 | Washer | 1 | PTFE |

| Code | S76D50L | S76E50L | S76F50L | S76G50L | S76H50L | S76I50L |
|--|---------|---------|---------|---------|---------|---------|
| Size (inch) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 15 | 20 | 25 | 30.4 | 38 | 48 |
| I (mm) | 16.5 | 19 | 22.5 | 25 | 26 | 29 |
| L (mm) | 65 | 79 | 92.5 | 109.5 | 126 | 150 |
| G (mm) | 32.5 | 39.5 | 46.5 | 55 | 63 | 75 |
| H (mm) | 32.5 | 39.5 | 42.5 | 56 | 63.2 | 72 |
| N (mm) | 34.5 | 42 | 49.5 | 60 | 69 | 82 |
| A (mm) | 97 | 97 | 97 | 145 | 145 | 145 |
| ØC (mm) | Ø5.6 | Ø5.6 | Ø5.6 | Ø6.6 | Ø6.6 | Ø6.6 |
| H1 (mm) | 16.5 | 16.5 | 16.5 | 23 | 23 | 23 |
| Square B (mm) | 9 | 9 | 9 | 11 | 11 | 14 |
| CH A/F (mm) | 27 | 32 | 41 | 50 | 55 | 70 |
| Flange connection DIN ISO 522 DIN 3337 | F03 | F03 | F03 | F05 | F05 | F05 |
| P (ISO 262 Thread) | M4 | M4 | M4 | M5 | M5 | M5 |
| Kv (m³/h) | 5.7 | 11.1 | 16.7 | 28.1 | 44.5 | 71.1 |

TORQUE FOR ACTUATOR SIZING N.M



| Delta P --> | 0÷16 bar | |
|-------------|----------|----------|
| Valve size | to open | to close |
| 1/2" | 3,5 | 3,5 |
| 3/4" | 4,0 | 4,0 |
| 1" | 4,5 | 4,5 |
| 1 1/4" | 11,7 | 11,7 |
| 1 1/2" | 21,5 | 21,5 |
| 2" | 28,0 | 28,0 |

TORQUE CORRECTION FACTORS



Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:


| | |
|--|---------|
| Lubricating oils or liquids | 0.8 |
| Dry gases, natural gas | 1.5 |
| Slurries or liquids bearing abrasive particles | 1.5÷2.5 |

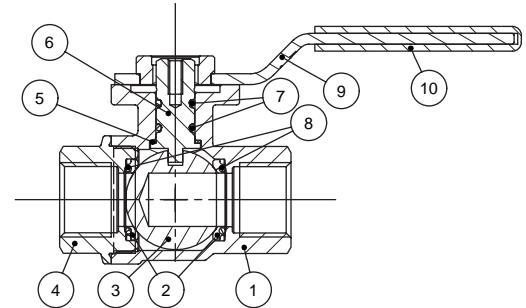

1.1/4"-1.1/2"-2" handle configuration

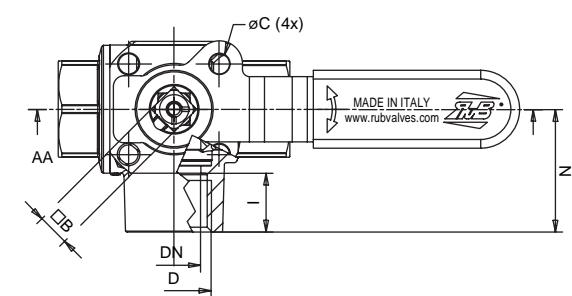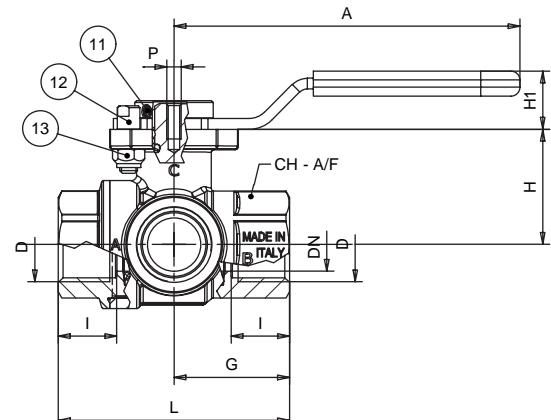

PRESSURE DROP CHART

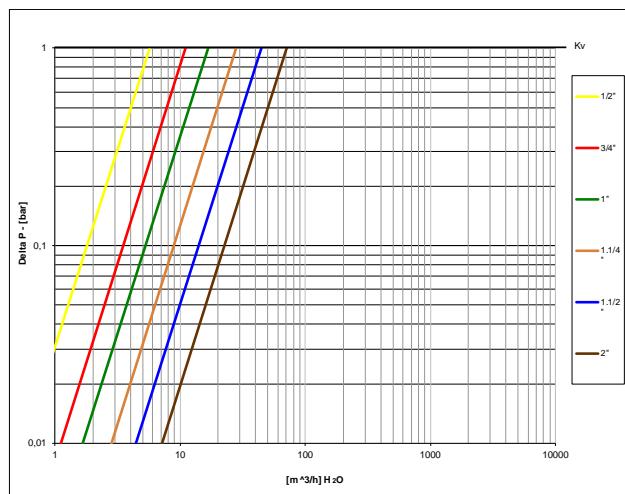



S.84 EN331 spring return

**Female/Female
1/4" - 2", EN 10226-1**

Access to fluid systems in public places could potentially convert into costs and safety problems. In order to avoid unattended valves being left open with negative economic or environmental consequences, **RuB** developed the automatic self-closing valve.

The valve can be opened normally by rotating the handle 90° and when the user releases the handle, the valve shuts off automatically. Best solution for service stations, trucks, public areas, gardens. The same features are also useful in industrial applications, where a valve must not be left open unattended.



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Travel stops on body to avoid stresses at stem
- Chrome plated brass ball for longer life with rinse hole

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Stainless steel handle (1.4016 / AISI 430)
- Taper male by parallel female threads

HANDLE

- Robust spring ensures auto shutt-off with max pressure in valve
- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection

WORKING PRESSURE & TEMPERATURE

- 40 bar (600 PSI) non-shock cold working pressure
- -40°C to +170°C (-40°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball (1.4401 / AISI 316)
- Custom Design


PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25 mm.

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.

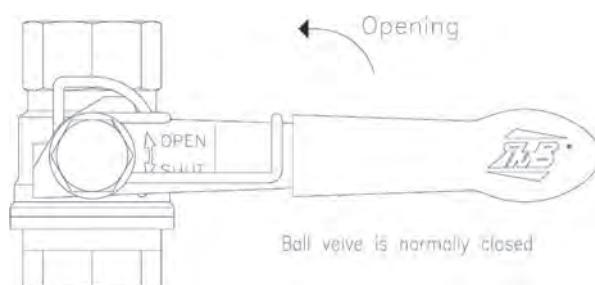


s.84 EN331 spring return XCES84EMR - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|-------------------|
| 1 | Nickel plated body (external treatment) | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball with rinse hole (read rinse hole on sizes from 3/4" up to 2") | 1 | CW617N |
| 4 | Nickel plated end-cap (external treatment) | 1 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW617N |
| 6 | Unplated spring nut | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | Spring return | 1 | 1.4310 (AISI 302) |
| 9 | Yellow PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

1 1/4" - 2" hollow ball

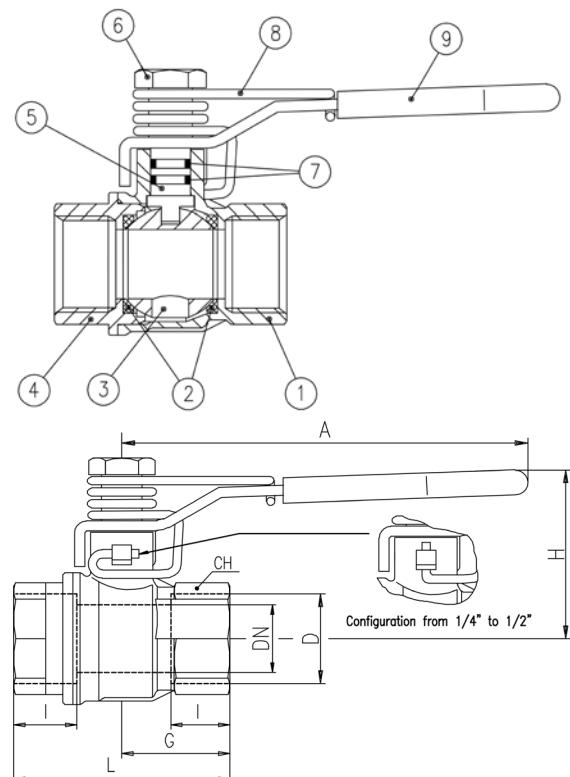


| Code | S84B00M | S84C00M | S84D00M | S84E00M | S84F00M | S84G00M | S84H00M | S84I00M |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| D (Inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| I (mm) | 12 | 12 | 15,5 | 17 | 21 | 23 | 23 | 26,5 |
| L (mm) | 45 | 45 | 59 | 64 | 81 | 93 | 102 | 121 |
| G (mm) | 22,5 | 22,5 | 29,5 | 32 | 40,5 | 46,5 | 51 | 60,5 |
| A (mm) | 100 | 100 | 100 | 120 | 120 | 158 | 158 | 158 |
| H (mm) | 38 | 38 | 43 | 50 | 54 | 73 | 79 | 86 |
| CH (mm) | 17 | 20 | 25 | 31 | 40 | 49 | 54 | 68,5 |
| Kv (m³/h) | 3,9 | 8,2 | 28 | 36 | 62 | 79 | 124 | 178 |


DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

Ball valves are marked CE on handle from 1 1/4" to 2" as follow: CE XXCODEXX Cat I-A

PRESSURE-TEMPERATURE CHART

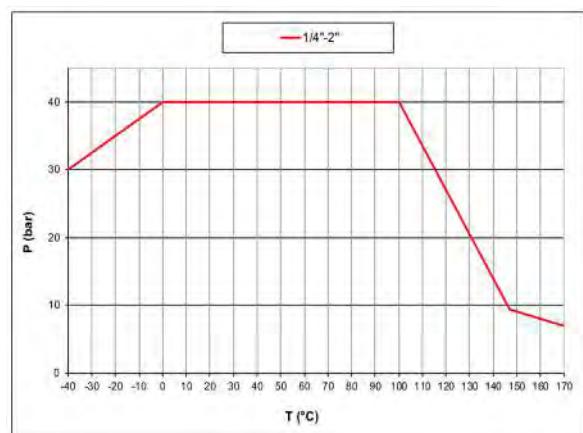

PRESSURE DROP CHART

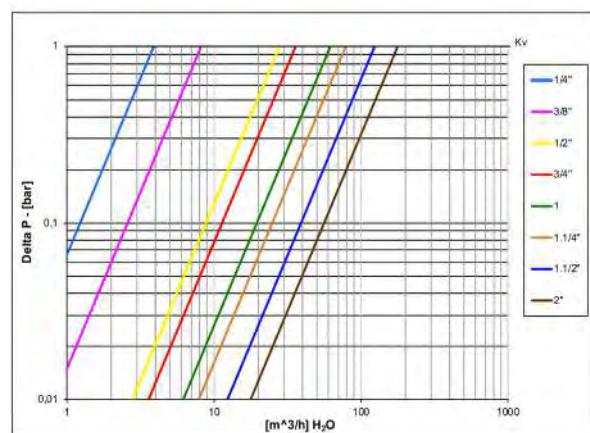



S.85

Female/Female
1/4" - 2"
EN 10226-1, packing gland



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Oval lockable handle ①
- Patented locking device ②
- Stainless steel handle (1.4016 / AISI 430) ③
- T-handle ④
- Stem extension
- Stubby handle

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 40 bar (600 PSI) non-shock cold working pressure
- -40°C to +170°C (-40°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball and/or stem (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design

PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25mm

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.




s.85 XCES85 - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | | Material |
|------------------|--|------|--|------------------------|
| 1 | Nickel plated body (external treatment) | 1 | | CW617N |
| 2 | Seat | 2 | | PTFE |
| 3 | Chrome plated ball | 1 | | CW617N |
| 4 | Nickel plated end-cap (external treatment) | 1 | | CW617N |
| 5 | Nickel plated stem packing gland design | 1 | | CW617N |
| 6 | Nickel plated gland nut | 1 | | CW617N |
| 7 | Geomet® nut | 1 | | C4C (EN10263-2) |
| 8 | Packing gland seal | 1 | | PTFE |
| 9 | Washer | 1 | | PTFE carbon filled 25% |
| 10 | Black PVC coated Geomet® steel handle | 1 | | DD11 (EN10111) |

1 1/4"-2" hollow ball

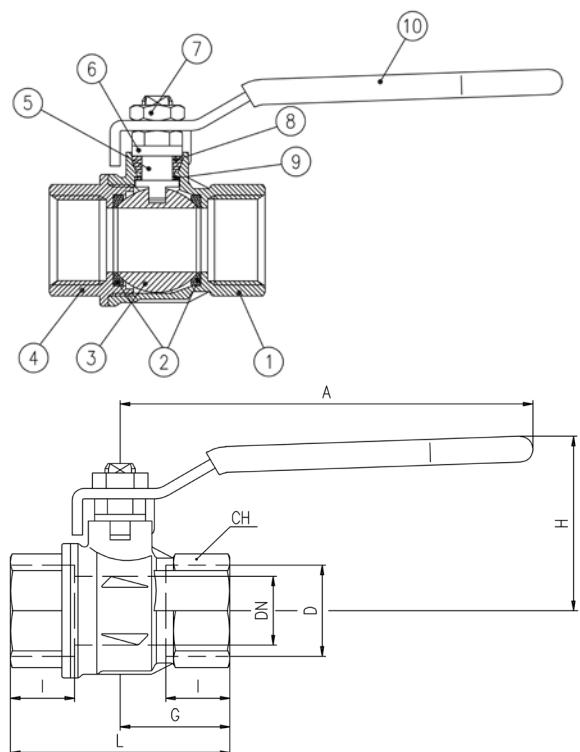


| Code | S85B01 | S85C01 | S85D01 | S85E01 | S85F01 | S85G01 | S85H01 | S85I01 |
|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (Inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| I (mm) | 12 | 12 | 15,5 | 17 | 21 | 23 | 23 | 26,5 |
| L (mm) | 45 | 45 | 59 | 64 | 81 | 93 | 102 | 121 |
| G (mm) | 22,5 | 22,5 | 29,5 | 32 | 40,5 | 46,5 | 51 | 60,5 |
| A (mm) | 82 | 82 | 100 | 120 | 120 | 158 | 158 | 158 |
| H (mm) | 39,5 | 39,5 | 43 | 50,5 | 54,5 | 76 | 82 | 89 |
| CH (mm) | 17 | 20 | 25 | 31 | 40 | 49 | 54 | 68,5 |
| Kv (m³/h) | 3,9 | 8,2 | 28 | 42 | 70 | 80 | 125 | 179 |


Ball valves are marked CE on handle from 1 1/4" to 2" as follow:

CE XXCODEXX Cat I-A

PRESSURE-TEMPERATURE CHART

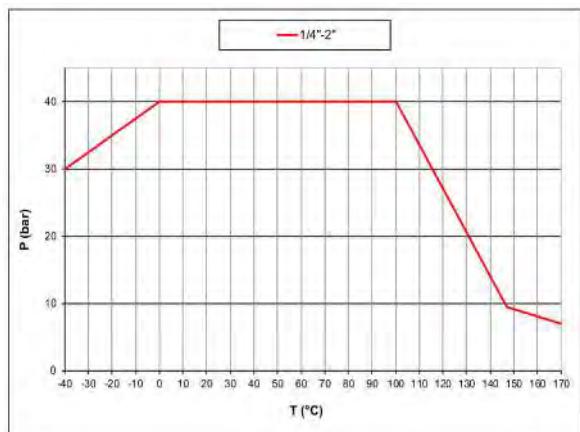

PRESSURE DROP CHART

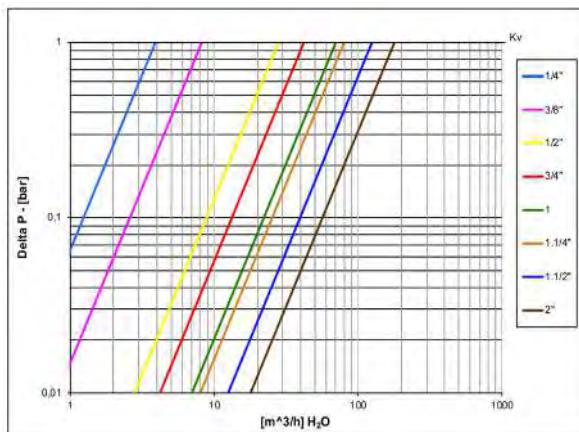



S.92 barrel drain

Male/Female 3/4" - 1"

The s.92 **RuB** brass ball valve is specifically designed to offer easy and effective drainage of storage tanks and can be installed at the bottom of your barrel or tank and operated with a simple 90° turn to allow full flow accessibility to quickly drain your water, oil, gasoline or other fluids. Its 45° threaded elbow allows for additional pipe connection to conveniently install the drain valve in the best location and in addition the valve features a patented **RuB** tamper-proof locking handle to ensure there is no unauthorized access to the tank. The s.92 can easily be installed on small tanks, utility tanks, overhead farm tanks, and drums as a gravity flow shut-off valve. Another good idea from **RuB**!



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 speciations

STEM

- Blowout-proof nickel plated brass stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance

SEALING

- Glass filled pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B.1.20.1 male by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Oval lockable handle ①
- Stainless steel handle (1.4016 / AISI 430) ②
- Stubby handle ③
- T-handle ④
- Non-locking Geomet® carbon steel lever handle

HANDLE

- Geomet® carbon steel lockable handle patent n. 7074-B/90 with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar), (150 WSP / -10 bar all sizes) non-shock cold working pressure
- *150 psig (10 bar) non-shock steam working pressure. Not suitable for throttling steam
- -40°F to +366°F (-40°C to + 170 °C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball and/or stem (1.4401 / AISI 316)
- Custom design
- Pure PTFE seals
- EN 10226-1, ISO 228 parallel female by female threads
- ISO 7/1, BS 21 BSPT taper female by female threads

PED DIRECTIVE

- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.




s.92 barrel drain XCES92S2 - 5466


Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|---|------|-------------------------|
| 1 | Unplated NPT body | 1 | CW617N |
| 2 | Seat | 2 | PTFE glass filled 5-15% |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Unplated NPT end-cap | 1 | CW617N |
| 5 | Nickel plated stem packing gland design | 1 | CW617N |
| 6 | Nickel plated gland nut | 1 | CW617N |
| 7 | Geomet® nut | 1 | CB4FF (EN10263-2) |
| 8 | Packing gland seal | 1 | PTFE |
| 9 | Washer | 1 | PTFE carbon filled 25% |
| 10 | Light blue PVC coated Geomet® steel lockable handle | 1 | DD11 (EN10111) |
| 11 | Elbow | 1 | CW617N |

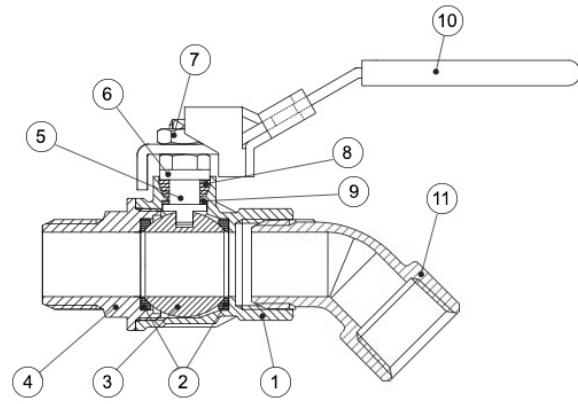


| Code | S92ES2MO | S92FS2MO |
|-----------------------------|----------|----------|
| D (inch) | 3/4" | 1" |
| DN (mm) | 20 | 25 |
| I (mm) | 17 | 21 |
| L (mm) | 76,5 | 92,4 |
| G (mm) | 32 | 40,5 |
| A (mm) | 117 | 117 |
| H (mm) | 60 | 64 |
| CH (mm) | 31 | 40 |
| Kv (m³/h) | 42 | 70 |

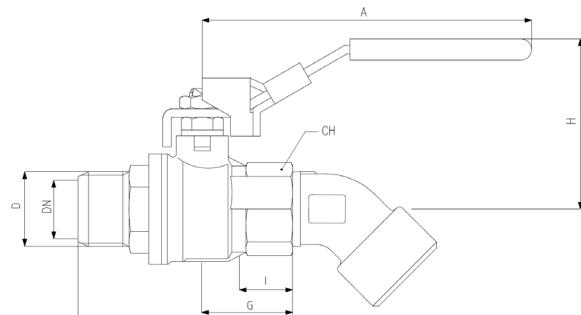


DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

PRESSURE-TEMPERATURE CHART

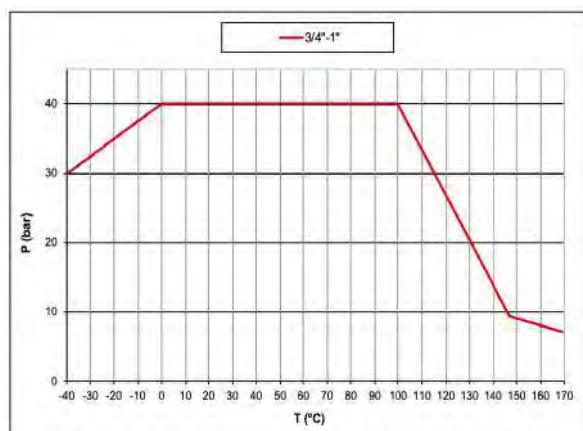

PRESSURE DROP CHART

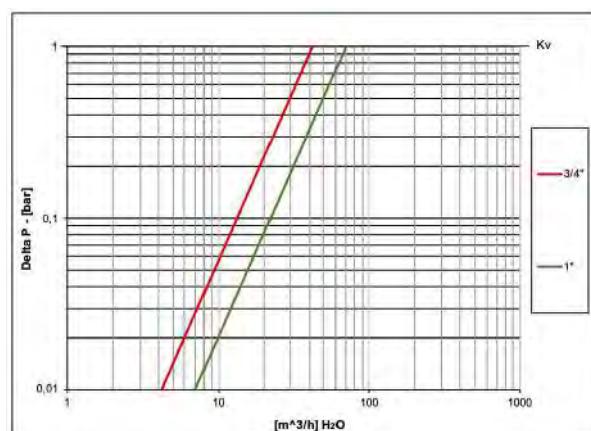



s.92S NPT solid ball

Female/Female
1/4" - 4"



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass solid ball for longer life
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance
- Triple stem seals in sizes over 2"

SEALING

- Glass filled pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B. 1.20.1 female by female threads

FLOW

- Full port to DIN 3357 for maximum flow
- Solid ball for optimum CV

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar) up to 2", 450 PSI (30 bar) over 2", (150 WSP / -10 bar all sizes) non-shock cold working pressure
- 250 PSI (17 bar) non-shock working pressure for LP-Gas
- *150 psig (10 bar) non-shock steam working pressure. Not suitable for throttling steam
- -40°F to +366°F (-40°C to +185°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball and/or stem (1.4401 / AISI 316)
- Custom design
- Pure PTFE seals

APPROVED BY OR IN COMPLIANCE WITH

- Canadian standards Association (United States, Canada)
- Factory Mutual (United States)
- RoHS Compliant (EU)
- GOST-R (Russia)
- Underwriters Laboratories (United States, Canada):
 - Guide YSDT: LP-Gas shut-off valve
 - Guide YRBX: Flammable liquid shut-off valve
 - Guide YRPV: Gas shut-off valve for use with natural and manufactured gases
- Guide MHKZ: No. 6 oil at 250°F
- CRN-TSSA acc. to MSS SP110 (Canada)
- Kuwait Fire Service Directorate (Kuwait)
- Meeting WW-V-35C Federal U.S. Specification (United States)

NOTE: approvals apply to specific configurations/sizes only.

OPTIONS UP TO 2" SIZE

- Oval lockable handle up to 2", round over 2" **1**
- Patented locking device for valves up to 4" **2**
- Stainless steel handle (1.4016 / AISI 430) **3**
- Stem extension
- Stubby handle **4**
- T-handle **5**




s.92S NPT solid ball XCES92S - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




| Part description | | Q.ty | Material |
|------------------|---|------|-------------------------|
| 1 | Unplated NPT body | 1 | CW617N |
| 2 | Seat | 2 | PTFE glass filled 5-15% |
| 3 | Chrome plated solid ball | 1 | CW617N |
| 4 | Unplated NPT end-cap | 1 | CW617N |
| 5 | Nickel plated stem packing gland design | 1 | CW617N |
| 6 | Nickel plated gland nut | 1 | CW617N |
| 7 | Geomet® nut | 1 | C4C (EN10263-2) |
| 8 | Packing gland seal | 1 | PTFE |
| 9 | Washer | 1 | PTFE carbon filled 25% |
| 10 | Yellow PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

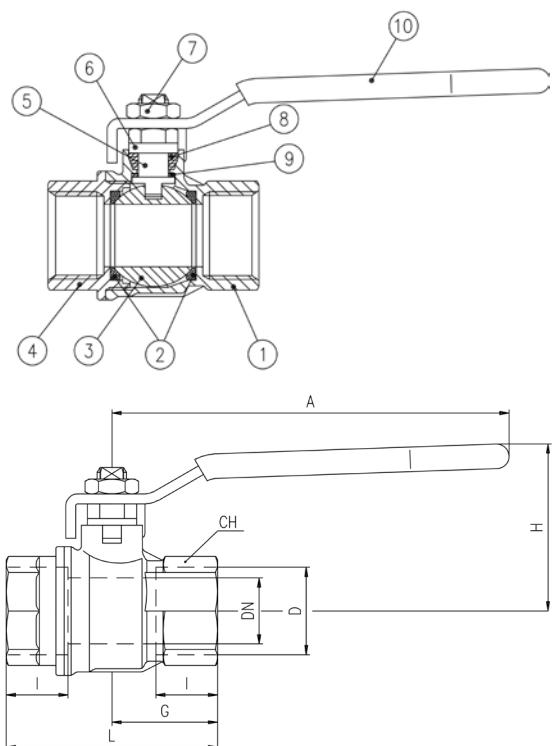


| Code | S92B41 | S92C41 | S92D41 | S92E41 | S92F41 | S92GP41 | S92GH41 | S92GI41 | S92L41 | S92M41 | S92N41 |
|------------------|--------|--------|--------|--------|--------|---------|---------|---------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |
| DN (inch) | 0,315 | 0,374 | 0,591 | 0,748 | 0,945 | 1,181 | 1,496 | 1,890 | 2,520 | 2,992 | 3,937 |
| I (inch) | 0,472 | 0,472 | 0,61 | 0,669 | 0,827 | 0,906 | 0,906 | 1,043 | 1,26 | 1,378 | 1,634 |
| L (inch) | 1,772 | 1,772 | 2,323 | 2,520 | 3,189 | 3,661 | 4,016 | 4,764 | 6,142 | 6,969 | 8,504 |
| G (inch) | 0,886 | 0,886 | 1,161 | 1,260 | 1,594 | 1,831 | 2,008 | 2,382 | 3,071 | 3,484 | 4,252 |
| A (inch) | 3,228 | 3,228 | 3,937 | 4,724 | 4,724 | 6,22 | 6,22 | 6,22 | 10,039 | 10,039 | 10,039 |
| H (inch) | 1,563 | 1,563 | 1,695 | 1,988 | 2,153 | 2,988 | 3,236 | 3,5 | 5,197 | 5,512 | 6,063 |
| CH (inch) | 0,669 | 0,787 | 0,984 | 1,22 | 1,575 | 1,929 | 2,126 | 2,697 | 3,346 | 3,898 | 4,921 |
| Cv (GPM) | 4,5 | 9,5 | 32,3 | 48,5 | 80,9 | 127,1 | 214,9 | 295,8 | 596,2 | 896,5 | 1305,5 |

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4. Stem configuration of valves over 2" is slightly different.

PRESSURE-TEMPERATURE CHART

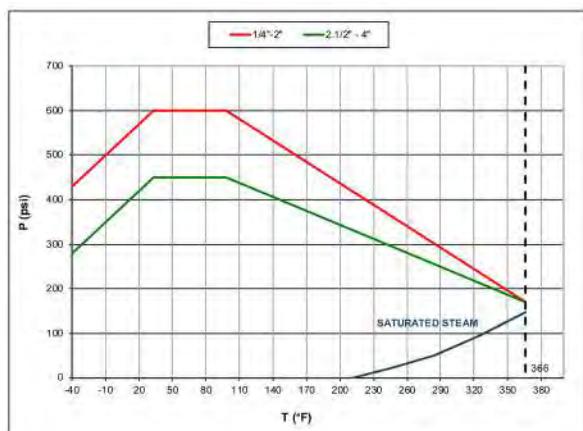

PRESSURE DROP CHART

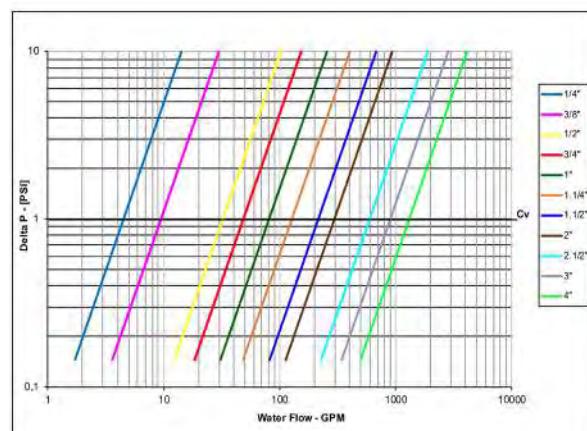



s.92 NPT SS trim

Female/Female 1/4" - 2"

Abrasive media? Life problems with your current valves?

RuB has the solution! Thanks to its long experience in industrial applications, **RuB** offers a variety of configurations specifically designed to solve critical situations. Brass is notably a "soft" alloy with high copper content having features that make it ideal for plumbing and sanitary installations. When it comes to industrial applications, however, you may need the tough chemistry of stainless steel.

And here we are: **RuB** combines the properties of a brass body with strength of stainless steel ball and stem. Ideal for abrasive media and other severe applications.



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Stainless steel ball and stem for abrasive liquids
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof stainless steel stem
- Pure PTFE adjustable packing gland and reinforced washer for lower torque and easy maintenance

SEALING

- Glass filled pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B. 1.20.1 female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Oval lockable handle ①
- Patented locking device ②
- Stem extension
- Stainless steel handle (1.4016 / AISI 430) ③
- Stubby handle ④
- T-handle ⑤

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar) up to 2", (150 WSP / -10 bar) non-shock cold working pressure
- *150 psig (10 bar) non-shock steam working pressure. Not suitable for throttling steam
- -40°F to +366°F (-40°C to +185°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design
- Zure PTFE seals
- Male by female NPT threads

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.





s.92 NPT SS TRIM XCES9248 - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




| Part description | | Q.ty | Material |
|------------------|---|------|-------------------------|
| 1 | Unplated NPT body | 1 | CW617N |
| 2 | Seat | 2 | PTFE glass filled 5-15% |
| 3 | Stainless steel ball | 1 | 1.4401 / AISI 316 |
| 4 | Unplated NPT end-cap | 1 | CW617N |
| 5 | Stainless steel stem packing gland design | 1 | 1.4401 / AISI 316 |
| 6 | Nickel plated gland nut | 1 | CW617N |
| 7 | Nickel plated handle nut | 1 | CW617N |
| 8 | Packing gland seal | 1 | PTFE |
| 9 | Washer | 1 | PTFE carbon filled 25% |
| 10 | Yellow PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

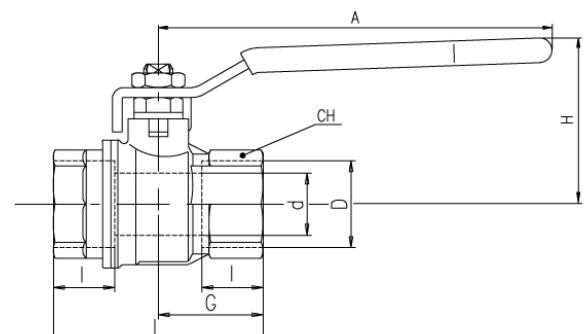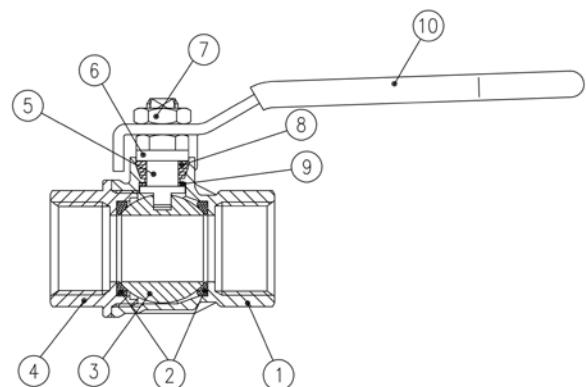


| Code | S92B48 | S92C48 | S92D48 | S92E48 | S92F48 | S92G48 | S92H48 | S92I48 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (inch) | 0,315 | 0,374 | 0,591 | 0,748 | 0,945 | 1,181 | 1,496 | 1,890 |
| I (inch) | 0,472 | 0,472 | 0,610 | 0,669 | 0,827 | 0,906 | 0,906 | 1,043 |
| L (inch) | 1,772 | 1,772 | 2,323 | 2,520 | 3,189 | 3,661 | 4,016 | 4,764 |
| G (inch) | 0,886 | 0,886 | 1,161 | 1,260 | 1,594 | 1,831 | 2,008 | 2,382 |
| A (inch) | 3,228 | 3,228 | 3,937 | 4,724 | 4,724 | 6,220 | 6,220 | 6,220 |
| H (inch) | 1,563 | 1,563 | 1,695 | 1,988 | 2,153 | 2,988 | 3,236 | 3,500 |
| CH (inch) | 0,669 | 0,787 | 0,984 | 1,22 | 1,575 | 1,929 | 2,126 | 2,697 |
| Cv (GPM) | 4,5 | 9,5 | 32,3 | 48,5 | 80,9 | 127,10 | 214,90 | 295,80 |

d shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

PRESSURE-TEMPERATURE CHART

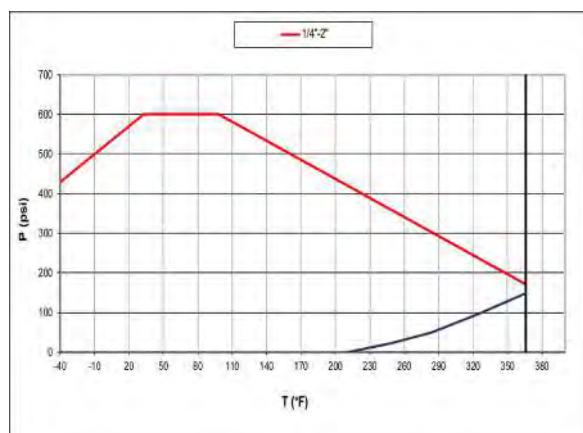

PRESSURE DROP CHART

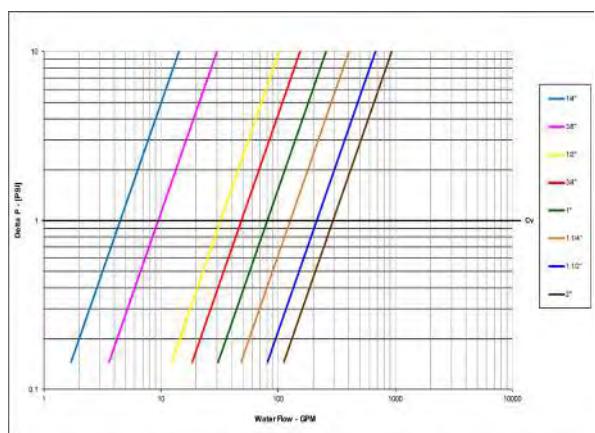



S.95 NPT spring return

Female/Female 1/4" - 2"

Access to fluid systems in public places could potentially convert into costs and safety problems.

In order to avoid unattended valves being left open with negative economic or environmental consequences, **RuB** developed the automatic self-closing valve.

The valve can be opened normally by rotating the handle 90° and when the user releases the handle, the valve shuts off automatically.

Best solution for service stations, trucks, public areas, gardens. The same feature is useful in industrial applications, where a valve must not be left open unattended.

QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Handle stops on body to avoid stresses at stem
- Chrome plated brass ball for longer life

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Stainless steel handle (1.4016 / AISI 430)



HANDLE

- Robust spring ensures auto shutt-off with max pressure in valve
- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar) non-shock cold working pressure
- 250 PSI (17 bar) non-shock working pressure for LP-Gas
- -40°F / +350°F (-40°C / +170°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve


UPON REQUEST

- Stainless steel ball (1.4401 / AISI 316)
- Custom design

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- Underwriters Laboratories (United States, Canada):
 - Guide YSDT: LP-Gas shut-off valve
 - Guide YRBX: Flammable liquid shut-off valve
 - Guide YRPV: Gas shut-off valve for use with natural and manufactured gases
 - Guide MHKZ: No. 6 oil at 250°F
- Canadian standards Association (United States, Canada)
- Factory Mutual (United States)
- RoHS Compliant (EU)
- Meeting WW-V-35C Federal U.S. Specification (United States)

NOTE: approvals apply to specific configurations/sizes only.

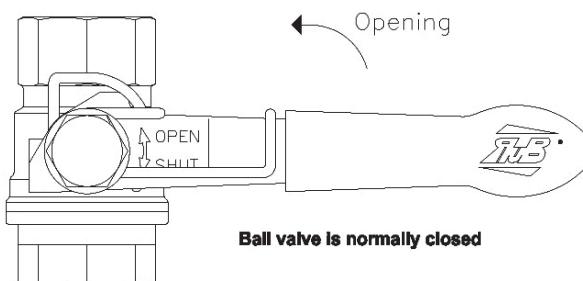


s.95 NPT SPRING RETURN XCES95MR - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Part description | | Q.ty | Material |
|------------------|--|------|-------------------|
| 1 | Unplated NPT body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Unplated NPT end-cap | 1 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW617N |
| 6 | Unplated spring nut | 1 | CW617N |
| 7 | O-Ring | 2 | FPM |
| 8 | Spring return | 1 | 1.4310 (AISI 302) |
| 9 | Yellow PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |


1 1/4" - 2" hollow ball

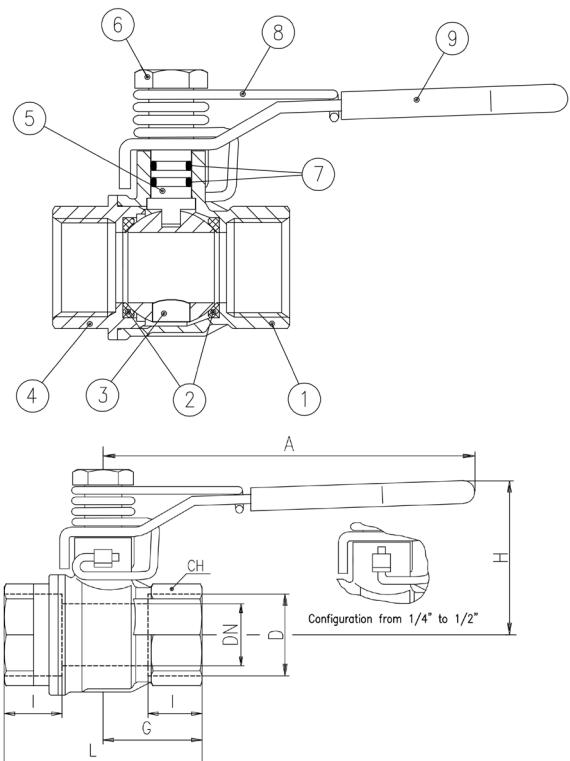


| Code | S95B41MR | S95C41MR | S95D41MR | S95E41MR | S95F41MR | S95G41MR | S95H41MR | S95I41MR |
|------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (inch) | 0.315 | 0.375 | 0.591 | 0.748 | 0.945 | 1.181 | 1.496 | 1.890 |
| I (inch) | 0.472 | 0.472 | 0.610 | 0.669 | 0.827 | 0.906 | 0.906 | 1.043 |
| L (inch) | 1.772 | 1.772 | 2.323 | 2.520 | 3.189 | 3.661 | 4.016 | 4.764 |
| G (inch) | 0.886 | 0.886 | 1.162 | 1.260 | 1.594 | 1.831 | 2.008 | 2.382 |
| A (inch) | 3.228 | 3.228 | 3.937 | 4.724 | 4.724 | 6.220 | 6.220 | 6.220 |
| H (inch) | 1.480 | 1.480 | 1.679 | 1.956 | 2.114 | 2.858 | 3.094 | 3.370 |
| CH (inch) | 0.669 | 0.787 | 0.984 | 1.220 | 1.575 | 1.929 | 2.126 | 2.697 |
| Cv (GPM) | 4.5 | 9.5 | 32.3 | 48.5 | 80.9 | 92.4 | 144.4 | 206.8 |

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

PRESSURE-TEMPERATURE CHART

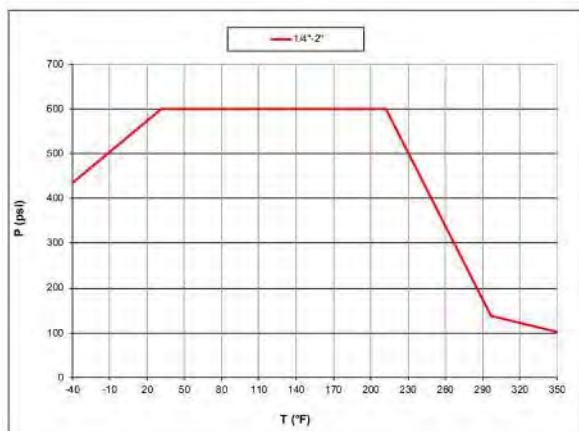

PRESSURE DROP CHART

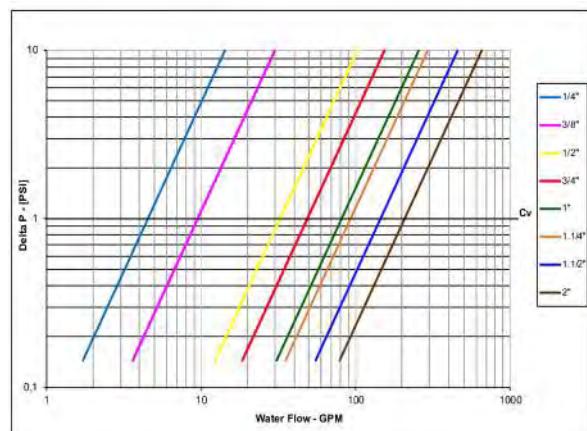



s.100 3-way 4 seats T-port

Female/Female/Female
1/4" - 2", ISO 228



QUALITY

- Chrome plated brass ball for longer life
- UNI 8858 cycle and torque tests performed

BODY

- Hot forged sand blasted nickel plated brass body and caps
- 3-way T design allows complete range of flow handling applications
- Copper alloy brass according to EN 12165 and EN 12164 specifications

STEM

- Maintenance-free, double NBR O-rings at the stem for maximum safety

SEALING

- Four seats design limits mixture among various fluids in the system
- PTFE seats

THREADS

- ISO 228 female threads

FLOW

- Extra port for lowest pressure drop

WORKING PRESSURE & TEMPERATURE

- See non-shock cold working pressure on chart
- -10°C to +120°C (+15°F to +250°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve


PED DIRECTIVE

- The product described in this document meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25mm; it cannot be used with non-dangerous gases in size larger than 32 mm

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)

NOTE: approvals apply to specific configurations/ sizes only.


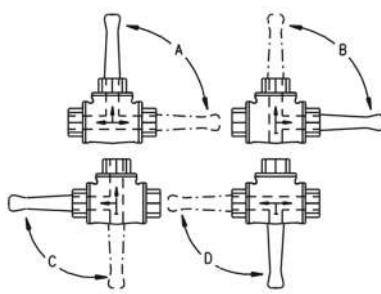


s.100 3-way T port

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




| Part description | | Q.ty | Material |
|------------------|----------------------------------|------|----------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 4 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated end-cap | 3 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW614N |
| 6 | Nickel plated nut | 1 | CW614N |
| 7 | O-Ring | 2 | NBR |
| 8 | Screw | 1 | Steel |
| 9 | Red handle | 1 | Aluminum |

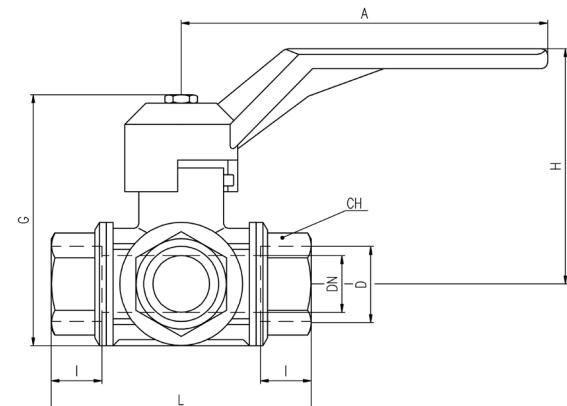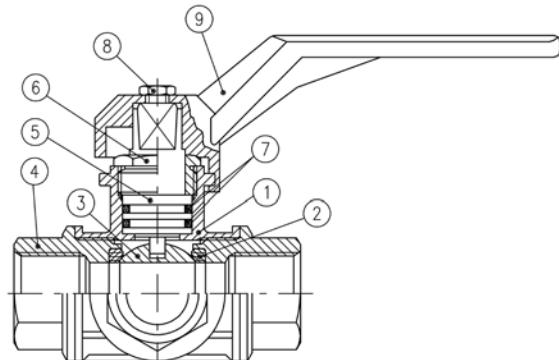


| Code | 100B00 | 100C00 | 100D00 | 100E00 | 100F00 | 100G00 | 100H00 | 100I00 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 10 | 12 | 14 | 18 | 23 | 29 | 36 | 45 |
| I (mm) | 19 | 19 | 19 | 23 | 25 | 27 | 31 | 36 |
| L (mm) | 77 | 77 | 77 | 92 | 104 | 118 | 138 | 162 |
| G (mm) | 75 | 75 | 75 | 91 | 105 | 115 | 128 | 165 |
| A (mm) | 125 | 125 | 125 | 145 | 170 | 170 | 170 | 260 |
| H (mm) | 65 | 65 | 65 | 83 | 96 | 102 | 109 | 139 |
| CH (mm) | 22 | 22 | 27 | 34 | 41 | 50 | 57 | 70 |
| Kv (m³/h) | 1.5 | 2.5 | 3.5 | 7.0 | 12 | 19.5 | 37 | 52 |

PRESSURE-TEMPERATURE CHART

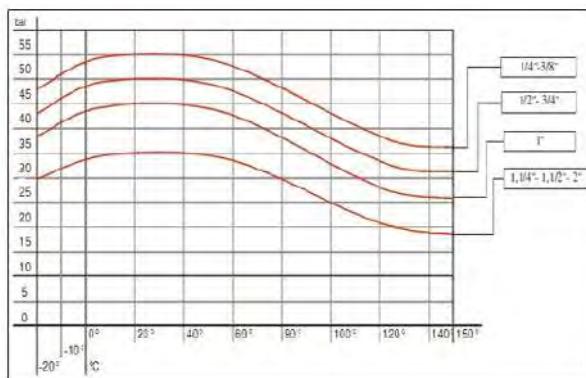

PRESSURE DROP CHART

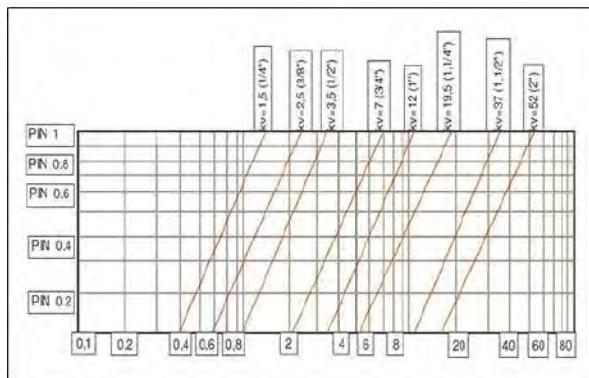



S.101 3-way 4 seats L-port

Female/Female/Female
1/4" - 2", ISO 228



QUALITY

- Chrome plated brass ball for longer life
- UNI 8858 cycle and torque tests performed

BODY

- Hot forged sand blasted nickel plated brass body and caps
- 3-way L design allows complete range of flow handling applications
- Copper alloy brass according to EN 12165 and EN 12164 specifications

STEM

- Maintenance-free, double NBR O-rings at the stem for maximum safety

SEALING

- Four seats design limits mixture among various fluids in the system
- PTFE seats

THREADS

- ISO 228 female threads

FLOW

- Extra port for lowest pressure drop

WORKING PRESSURE & TEMPERATURE

- See non-shock cold working pressure on chart
- -10°C to +120°C (+15°F to +250°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve


PED DIRECTIVE

- The product described in this document meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking; it cannot be used with dangerous gases in sizes larger than 25mm; it cannot be used with non-dangerous gases in size larger than 32 mm

APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)

NOTE: approvals apply to specific configurations/ sizes only.


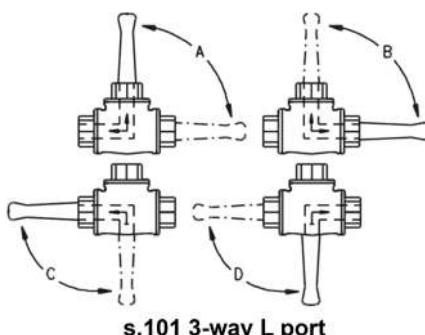


s.101 3-way L port

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.




| Part description | | Q.ty | Material |
|------------------|----------------------------------|------|----------|
| 1 | Nickel plated body | 1 | CW617N |
| 2 | Seat | 4 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated end-cap | 3 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW614N |
| 6 | Nickel plated nut | 1 | CW614N |
| 7 | O-Ring | 2 | NBR |
| 8 | Screw | 1 | Steel |
| 9 | Red handle | 1 | Aluminum |

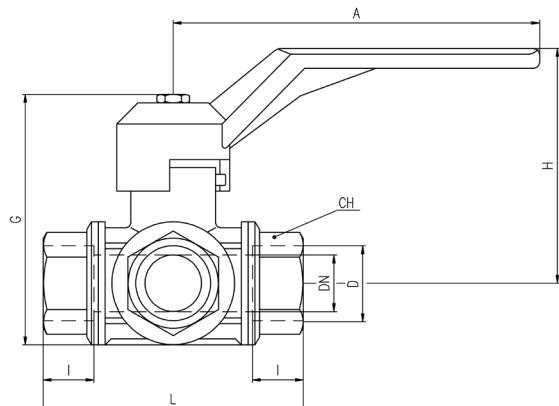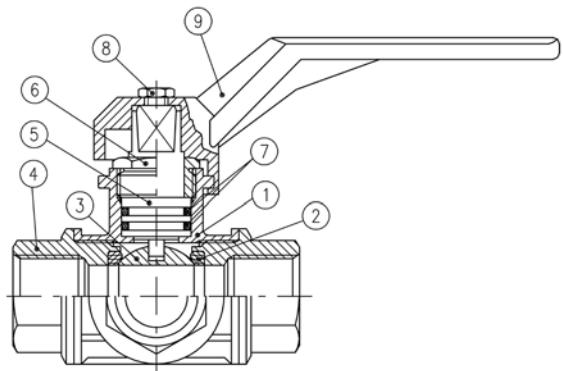


| Code | 101B00 | 101C00 | 101D00 | 101E00 | 101F00 | 101G00 | 101H00 | 101I00 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| DN (mm) | 10 | 12 | 14 | 18 | 23 | 29 | 36 | 45 |
| I (mm) | 19 | 19 | 19 | 23 | 25 | 27 | 31 | 36 |
| L (mm) | 77 | 77 | 77 | 92 | 104 | 118 | 138 | 162 |
| G (mm) | 75 | 75 | 75 | 91 | 105 | 115 | 128 | 165 |
| A (mm) | 125 | 125 | 125 | 145 | 170 | 170 | 170 | 260 |
| H (mm) | 65 | 65 | 65 | 83 | 96 | 102 | 109 | 139 |
| CH (mm) | 22 | 22 | 27 | 34 | 41 | 50 | 57 | 70 |
| Kv (m³/h) | 1.5 | 2.5 | 3.5 | 7.0 | 12 | 19.5 | 37 | 52 |

PRESSURE-TEMPERATURE CHART

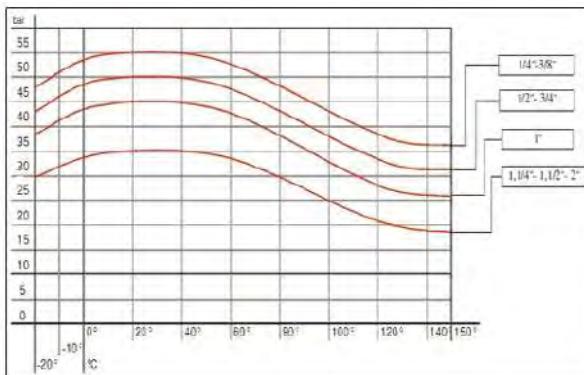

PRESSURE DROP CHART

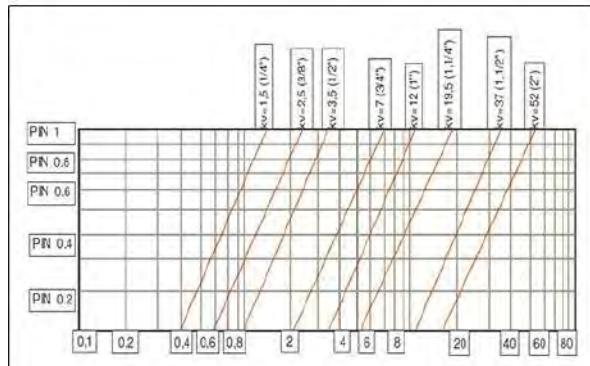



s.172 motor-oil compact drain ball valve

Specifically responding to a need in the automotive application, s.17 is fitted under the oil sum to ease drainage operations, and furthermore granting a most reliable tightness thanks to its special automatic locking device, even under severe conditions of vibration stress. Frozen drain plug and stripped threads are eliminated, no more contact with hot oil, no messy hands or cloths and reduced oil changing time.

PATENT PENDING



QUALITY

- 24h 100% seal test guaranteed
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Screwdriver slot, the slot orientation shows the ball position

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with metacrylate sealant
- Compact design and solid structure
- Finest brass according to EN 12165 and EN 12164 to prevent corrosion

STEM

- Blowout-proof AISI 316 stainless steel stem
- Maintenance-free, double FPM O-ring at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats

THREADS

- M22X1.5 thread with seat for O-ring seal

HANDLE

- 90° open / close

OPTIONS

- Elbow version with hose connection
- Allen stem

WORKING PRESSURE & TEMPERATURE

- 20 bar (300 PSI) non-shock cold working pressure
- -20°C to +130°C (-4°F to +266°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- AISI 316 stainless steel ball
- Custom design
- Aluminum body

PED DIRECTIVE

- The product meets the requirements of PED Directive 2014/68/UE and according to art.4 par.3, it does not require CE marking


APPROVED BY OR IN COMPLIANCE WITH

- GOST-R (Russia)
- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.




STRAIGHT CONFIGURATION

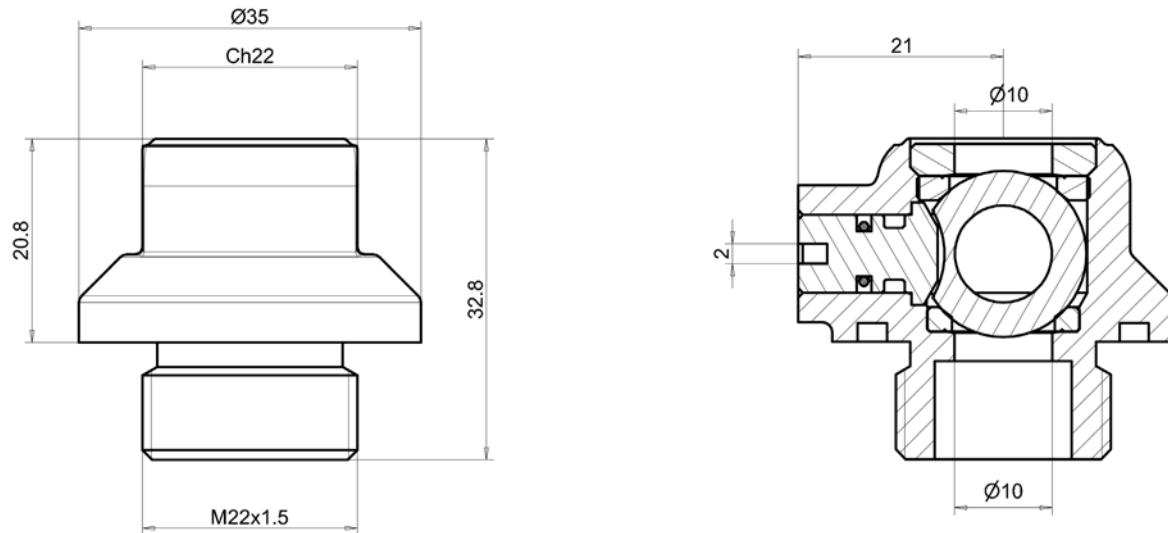

EXAMPLES OF VALVE DIMENSIONS AND CONFIGURATIONS

ELBOW CONFIGURATION

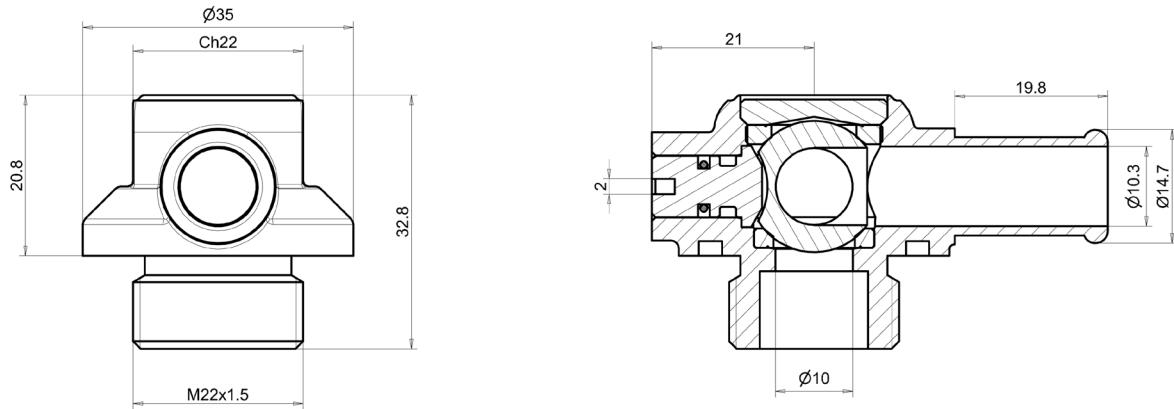



SNI7352

Female/Female 1/4" NPT needle valve

The new **RuB** needle valve proves the state of the art of RuB innovation capabilities. This inexpensive valve is designed to ease flow regulation in all applications where drops are counted like gold! The flow chart on reverse compares the **RuB** linear curve performance with competition and it is obvious how by counting the number of turns, the operator can easily adjust flow. All details of the **RuB** needle valve have been optimized to provide utmost performance, reliability and no maintenance. Another "install and forget" **RuB** product.



QUALITY

- Innovative design
- No maintenance ever required
- Performance guaranteed
- Tamper proof

BODY

- Hot forged brass body
- One piece body construction

STEM

- FPM stem seal design
- Handle stop on stem prevents stem blow-out

THREADS

- Fip x Fip NPT threads

FLOW

- Easy flow regulation

WORKING PRESSURE & TEMPERATURE

- 2000 PSI non-shock cold working pressure
- -40°F to +350°F
- WARNING: freezing of the fluid in the installation may severely damage the valve

UPON REQUEST





- 1/8" NPT threads
- Applications include shut off and throttling for pressure gauges and instruments.

OPTIONS

- Mip x Fip NPT threads


| Part description | | Q.ty | Material |
|------------------|---------------------|------|----------|
| 1 | Unplated valve body | 1 | CW617N |
| 2 | O-Ring | 1 | FPM |
| 3 | Retainer | 1 | CW617N |
| 4 | Handwheel | 1 | CW617N |

PRESSURE DROP CHART

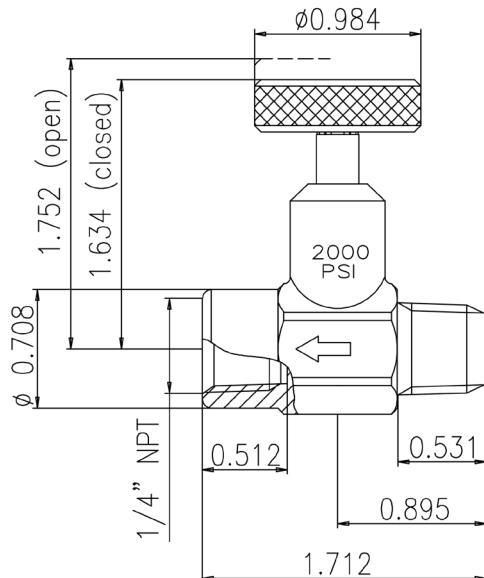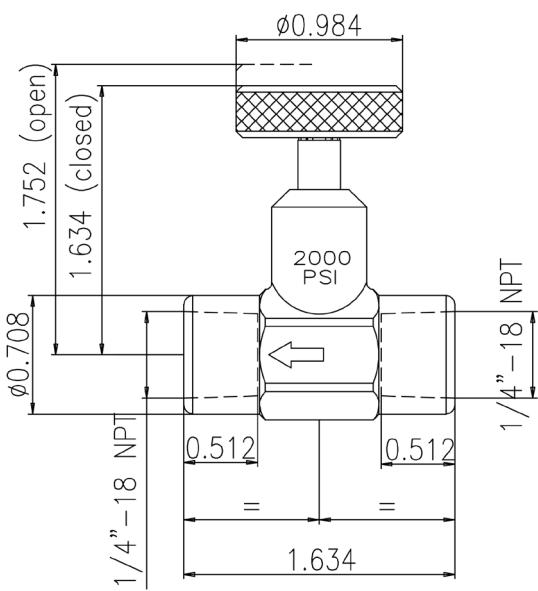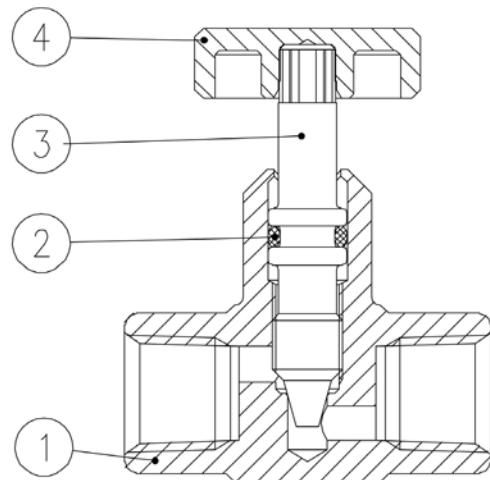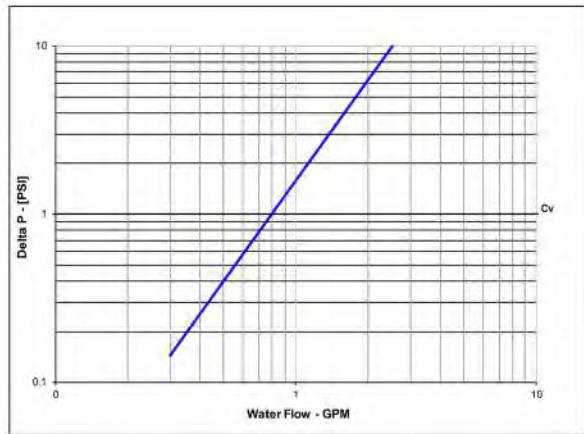



Instrumentation package

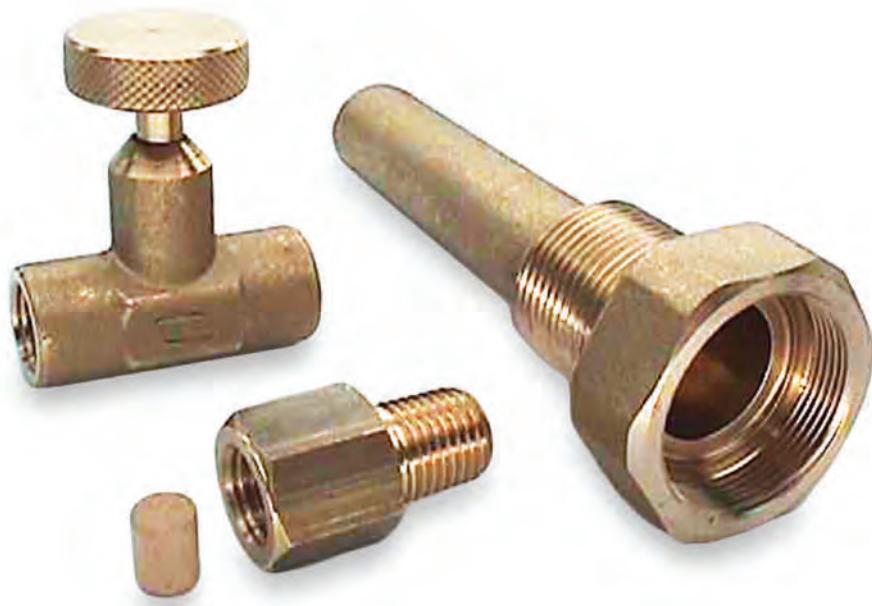




1/4" VALVE (2000 PSI), #SNI7352

1 1/4" THERMOMETER WELL (1000 PSI), #PNI34F2

1/4" SNUBBER (1000 PSI), #SNI8722

INSTRUMENTAL PACKAGE XCEWSN - 5466

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



| Needle Valve Part description | | Q.ty | Material |
|-------------------------------|---------------------|------|----------|
| 1 | Unplated valve body | 1 | CW617N |
| 2 | O-Ring | 1 | FPM |
| 3 | Retainer | 1 | CW617N |
| 4 | Handwheel | 1 | CW617N |

NEEDLE VALVE:

2000 PSI (CWP)

One piece body construction



Forged brass body

Fit x Fit NPT threads

Temp range -40°F to +350°F

FPM stem seal design

Applications include shut off and throttling for pressure gauges and instruments

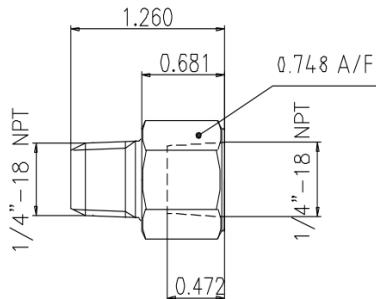

| Snubber Part description | | Q.ty | Material |
|--------------------------|---------------------|------|----------|
| 1 | Unplated valve body | 1 | CW617N |
| 2 | Bronze core | 1 | Bronze |

SNUBBER:


1000 PSI (CWP)

Forged brass with bronze core

Temp range -40°F to +350°F

Installed on gauges and instruments where pressure pulsations are present.

The snubber is used to damp the pulsations, giving more stable readings and reducing instrument wear.

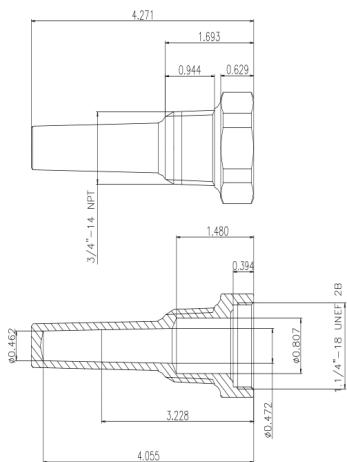

| Well Part description | | Q.ty | Material |
|-----------------------|---------------------|------|----------|
| 1 | Unplated valve body | 1 | CW617N |

THERMOMETER WELL:

1000 PSI (CWP)

Forged brass construction

Meets Fed. Spec GG-T-321

Meets SAMA RC-17-10

Installed on gauges and instruments where pressure pulsations are present. The snubber is used to damp the pulsations, giving more stable readings and reducing instrument wear.



Application Catalog



ACTUATION



INDUSTRY



PNEUMATIC



GAS



FIREFIGHTING



DRINKING WATER



PLUMBING



ACCESSORIES



Ask for additional information on the whole range of **RuB** products and consult with your supplier for special applications.



ALL RIGHTS RESERVED | COPYRIGHT© Bonomi Industries Srl 2026

Bonomi Industries Srl endeavors to provide comprehensive information about the installation, maintenance and operation of its products. For more details or clarification, please contact us. **Bonomi** Industries Srl reserves the right to change or modify product design, construction, specifications, materials or the information herein without prior notice and without incurring any obligation to make such changes and modifications on products previously or subsequently sold. Content of this document is proprietary to **Bonomi** Industries Srl and it may not be copied in part or in whole without prior written authorization. Recommendations on application design and material selection are based on available technical data and are offered as suggestions only. Each user should make his/her own tests to determine the suitability for his/her own particular use. **Bonomi** Industries Srl gives no express or implied warranties concerning the form, fit, or function of a product in any application. **Bonomi** Industries Srl does not accept liability for errors or omissions. Any undated reference to a code or standard shall be interpreted as referring to the latest edition.

Bonomi Industries Srl, **RuB** and triangles, are all registered trademarks of **Bonomi** Industries Srl. Other logos or trademarks are property of respective owners.





Via Padana Superiore, 29, 25080 Mazzano (BS), Italy
Tel.: +39 030 212441 - sales@rubvalves.com
www.bonomiindustries.com