



s.94

Female/Female
1/2" - 2"
ISO 228, for sensors



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications
- Tapped bottom M10x1 connection for temperature detector and other devices at user's option

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- ISO 228 parallel female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

OPTIONS

- Oval lockable handle ①
- Patented locking device ②
- Stem extension
- Stainless steel handle (1.4016 / AISI 430) ③
- T-handle ④
- Stubby handle
- **RuB** memory stop is designed to be installed with our stubby handle

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 30 bar (450 PSI) non-shock cold working pressure
- -20°C to +170°C (-4°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Glass filled PTFE seals
- Custom design

PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25mm

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.




Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.



Part description		Q.ty	Material
1	Nickel plated body (external treatment)	1	CW617N
2	Seat	2	PTFE
3	Cap	1	CW617N
4	O-Ring	1	FPM
5	Chrome plated ball	1	CW617N
6	Nickel plated end-cap (external treatment)	1	CW617N
7	Nickel plated stem O-ring design	1	CW617N
8	Geomet® nut	1	C4C (EN10263-2)
9	O-Ring	2	FPM
10	Red PVC coated Geomet® steel handle	1	DD11 (EN10111)

1 1/4" - 2" hollow ball

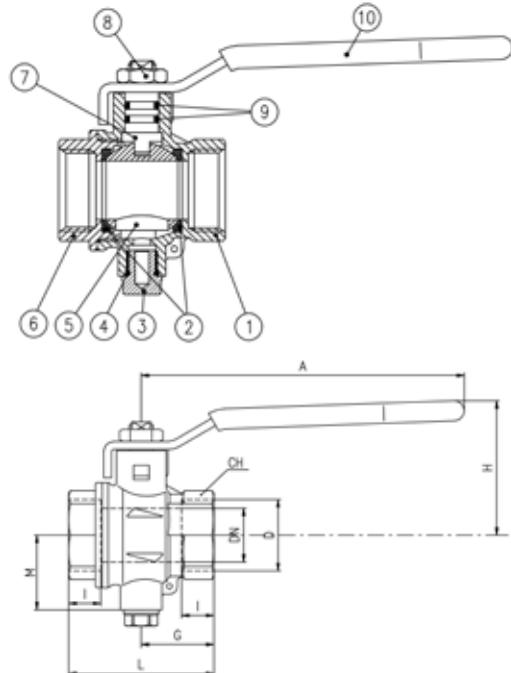


Compliant to CE 2014/68/UE product
Equipment category I Module A

Code	S94D00	S94E00	S94F00	S94G00	S94H00	S94I00
D (mm)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN (mm)	15	20	25	32	40	50
I (mm)	11	12	14	15	17	19
L (mm)	50	54	67	77	90	106
G (mm)	25	27	33.5	38.5	45	53
M (mm)	32	30	32	38	44.3	51.3
A (mm)	100	120	120	158	158	158
H (mm)	43	50	54	73	79	86
CH (mm)	25	31	40	49	54	68.5
Kv (m³/h)	28	36	62	79	124	178

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.
Ball valves are marked CE on handle from 1 1/4" to 2" as follow: CE XXCODEXX Cat I-A

PRESSURE-TEMPERATURE CHART

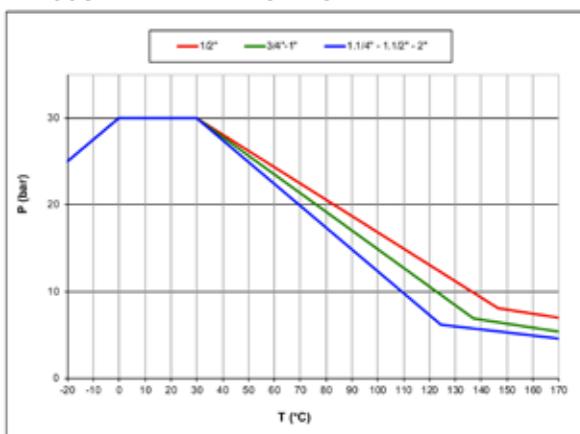

PRESSURE DROP CHART

