



s.6400LT

Female/Female

1" - 2"

EN 10226-1, ISO 5211, low torque



QUALITY

- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- 100% seal test guaranteed in according to EN 12266- 1 RATE A

BODY

- Hot forged sand blasted, nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO 5211 and DIN 3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Reinforced PTFE self-lubricating seats with flexible-lip and wear compensation design

THREADS

- EN 10226-1, ISO 228 parallel female by female threads

FLOW

- 100% full port for maximum flow

OPERATING MECHANISM

- Integrated sturdy ISO 5211 flange allows direct mounting of electric and pneumatic actuators, with no bracket or coupling required. See **RuB** line of electric and pneumatic actuators.

WORKING PRESSURE & TEMPERATURE

- Shell rating: 40 bar (600 PSI) non shock cold working pressure
- Seat rating: Delta P max permissible 16 bar (230 PSI)
- -20°C to +170°C (-4°F to +350°F)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Custom design

PED DIRECTIVE

- According to 2014/68/UE module A: it cannot be used with dangerous gases in sizes larger than 25mm

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)
- Water Regulations Advisory Scheme (United Kingdom)

NOTE: approvals apply to specific configurations/sizes only.

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- Compact power electric actuator for some sizes
- Manual lockable handle



s.6400LT XGES6400LT - 6071

Each user should perform his own tests to find out the suitability for his particular application. BONOMI INDUSTRIES makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the BONOMI INDUSTRIES products with your specific field of use.





ACTUATION

Part description		Q.ty	Material
1	Nickel plated body	1	CW617N
2	Ball seat	2	PTFE carbo-graphite filled
3	Chrome plated ball	1	CW617N
4	Nickel plated end-cap	1	CW617N
5	Washer	1	PTFE carbon filled 25%
6	Nickel plated stem O-ring design	1	CW617N
7	O-Ring	2	FPM
8	O-Ring	2	FPM

Compliant to CE 2014/68/UE product Equipment category I Module A

Code	S64F00A	S64G00A	S64H00A	S64I00A
D (inch)	1"	1 1/4"	1 1/2"	2"
DN (mm)	25	32	40	50
I (mm)	22.5	25	26	29
L (mm)	90	110	120	140
G (mm)	45.5	52	59	67.5
H (mm)	42.5	55.5	62	69
CH (mm)	41	50	55	70
ØA (mm)	36	36	50	50
□B (mm)	9	9	11	11
C (mm)	5.6	5.6	6.6	6.6
E (mm)	25	25	35	35
F (mm)	8.5	8.5	10	10
Flange connection DIN ISO 522 DIN 3337	F03	F03	F05	F05
Kv (m3/h)	100	155	245	290

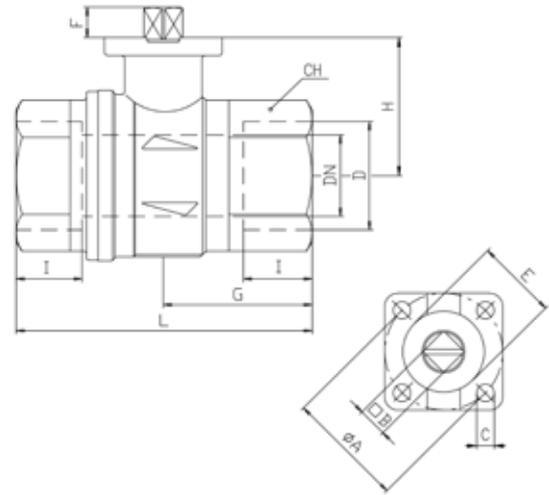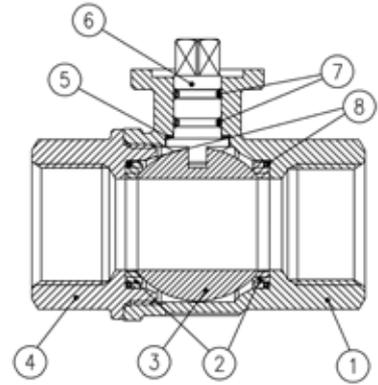

Ball valves are marked CE on end-cap from 1 1/4" to 2" as follow: CE XXCODEXX Cat I-A

TORQUE FOR ACTUATOR SIZING N.M

Delta P -->	0÷6 bar		>6÷16 bar	
	to open	to close	to open	to close
1"	2,2	2,2	3,5	3,5
1 1/4"	2,5	2,5	4	4
1 1/2"	5,8	5,8	9,5	9,5
2"	7,9	7,9	13	13


TORQUE CORRECTION FACTORS

Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:

Lubricating oils or liquids	0.8
Dry gases, natural gas	1.5
Slurries or liquids bearing abrasive particles	1.5÷2.5

PRESSURE-TEMPERATURE CHART

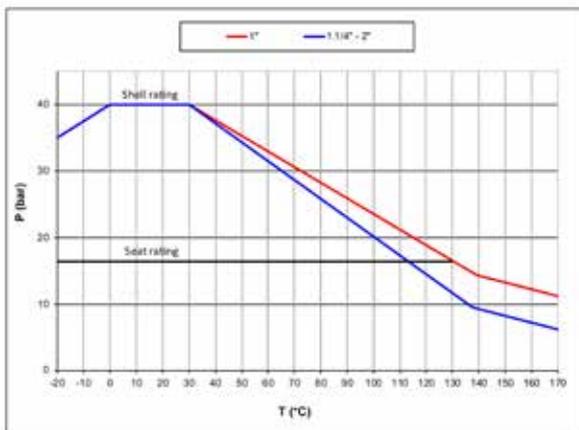

PRESSURE DROP CHART

